US011470896B2

(12) **United States Patent**
Green

(10) **Patent No.: US 11,470,896 B2**
(45) **Date of Patent: Oct. 18, 2022**

(54) **HAND GLOVE WITH DUAL ZIPPERS**

(71) Applicant: **Cheryl Lynne Abraham Green**, Brooklyn, NY (US)

(72) Inventor: **Cheryl Lynne Abraham Green**, Brooklyn, NY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/579,652**

(22) Filed: **Jan. 20, 2022**

(65) **Prior Publication Data**

US 2022/0132953 A1 May 5, 2022

Related U.S. Application Data

(63) Continuation of application No. 17/494,933, filed on Oct. 6, 2021.

(51) **Int. Cl.**
A41D 19/00 (2006.01)

(52) **U.S. Cl.**
CPC ***A41D 19/0044*** (2013.01)

(58) **Field of Classification Search**
CPC A41D 19/0044; A41D 19/0034; A41D 19/01552; A41D 19/0093; A41D 19/0048; A41F 1/06; Y10S 2/917
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,128,796	A *	8/1938	Bohm-Myro	A41D 19/0041 2/158
2,268,210	A *	12/1941	Fried	A41F 1/06 D2/621
2,516,241	A *	7/1950	Mulheran	A41F 1/06 2/160
2,549,660	A *	4/1951	Buhl	A41F 1/06 2/158
2,590,015	A *	3/1952	Kennedy	A41F 1/06 2/162
3,372,401	A *	3/1968	Woodward	A63B 71/146 2/161.4
3,430,265	A *	3/1969	Mazza	A41D 19/02 D2/619
3,504,379	A *	4/1970	Glick	A63B 71/146 D29/117.1

(Continued)

FOREIGN PATENT DOCUMENTS

FR	2611447	A *	9/1988	A41F 1/06
IT	0116814	A1 *	2/1983	A41F 1/06

Primary Examiner — Jillian K Pierorazio
(74) *Attorney, Agent, or Firm* — Michael J. Feigin, Esq.; Feigin and Fridman LLC

(57) **ABSTRACT**

A hand glove includes a glove body having a dorsal side, a palmar side, a radial side, an ulnar side, and a hand portion including a palm section, a dorsal section, a plurality of digit sheaths, and an opening for providing access to an interior of the glove. The digit sheaths include at least a first sheath corresponding to the first digit of a wearer's hand and second sheath corresponding to one or more of the other digits of a wearer's hand. The radial side includes a first zipper and a first fastening strap. The ulnar side includes a second zipper and a second fastening strap. The first zipper is parallel with and opposite to the second zipper. The dorsal side includes a fastener spanning the dorsal section. The fastening straps are configured to removably attach to the fastener to secure the glove body to a wearer's hand.

20 Claims, 8 Drawing Sheets

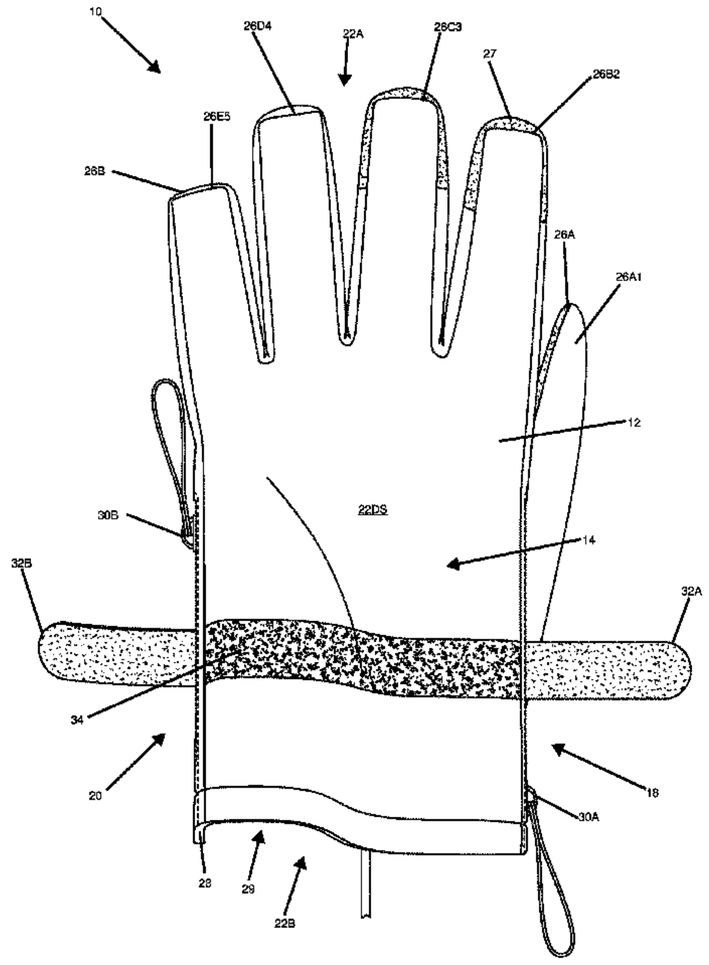

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,040,126	A *	8/1977	Cecil	A63B 71/146 2/161.5
4,042,977	A *	8/1977	Antonious	A41F 1/06 2/338
D249,749	S *	10/1978	Wanous	D2/622
4,615,049	A *	10/1986	Samelian	A41D 19/0017 2/163
4,691,388	A *	9/1987	Boone	A63B 71/146 2/161.5
D293,850	S *	1/1988	Dzierson, Jr.	D2/619
4,850,341	A *	7/1989	Fabry	A61F 13/104 601/40
5,073,988	A *	12/1991	Lewis, Jr.	A41D 19/0041 2/270
5,088,122	A *	2/1992	O'Toole	A63B 71/146 2/161.4
5,444,874	A *	8/1995	Samelian	A41D 19/0013 2/917
5,517,694	A *	5/1996	Fabry	A41D 19/01582 2/161.4
D397,837	S *	9/1998	Redwood	D2/614
5,950,240	A *	9/1999	Carpenter	A41D 19/0041 2/160
6,233,742	B1 *	5/2001	Yungkurth	A41D 19/002 2/160
6,912,732	B2 *	7/2005	Hatch	A41D 19/01558 2/161.1
RE38,948	E *	1/2006	Redman	A41D 13/08 2/16
8,726,418	B2 *	5/2014	DeBlasis	A41F 1/06 2/161.1
D729,396	S *	5/2015	Games, III	D24/207
2009/0100573	A1 *	4/2009	Coulter	A63B 71/141 2/163
2011/0197336	A1 *	8/2011	Suk	A41D 19/01582 2/161.3
2013/0160186	A1 *	6/2013	Favia	A41D 19/0013 2/162
2014/0096306	A1 *	4/2014	Hill	A41D 19/0034 2/158
2015/0150322	A1 *	6/2015	Fraga-Rosenfeld	A41F 1/06 2/167
2016/0227852	A1 *	8/2016	Hernandez	A41D 19/01505
2017/0273375	A1 *	9/2017	Tang	A41D 19/01
2019/0082759	A1 *	3/2019	Berry	A41F 1/06

* cited by examiner

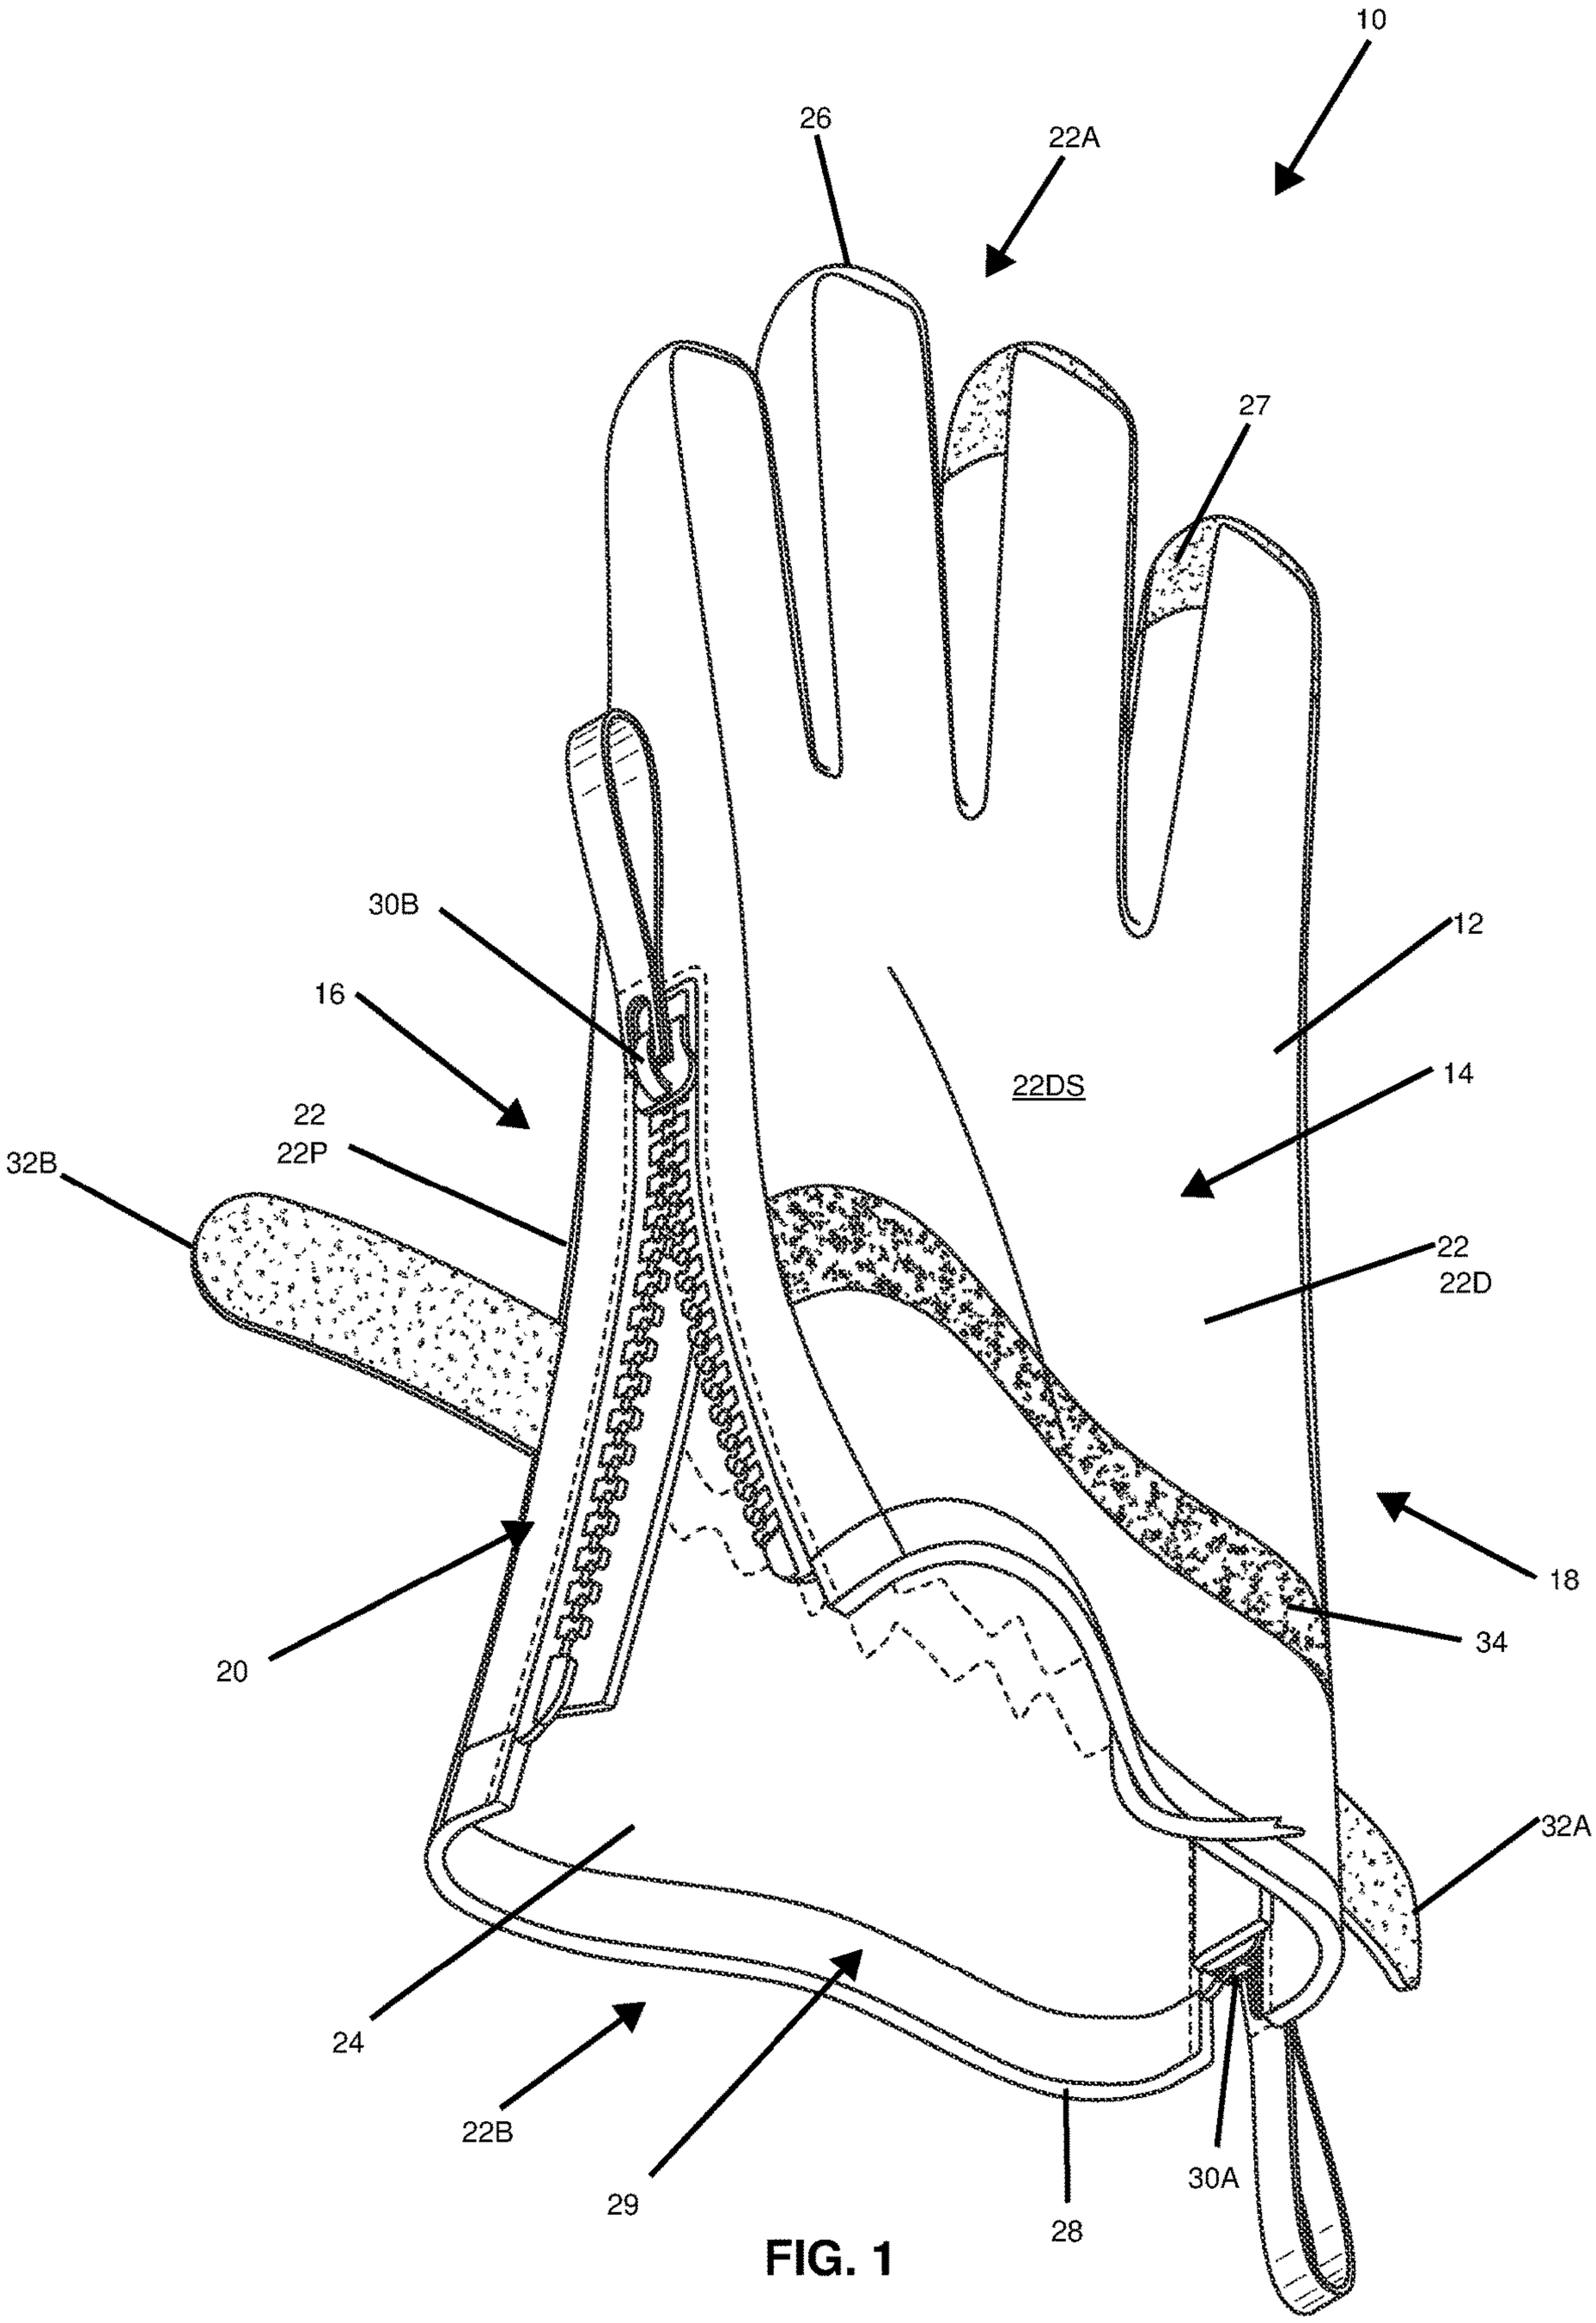
10
26
22A
27
30B
16
12
22DS
14
22
22P
32B
22
22D
18
34
20
32A
24
22B
29
28
30A

FIG. 1

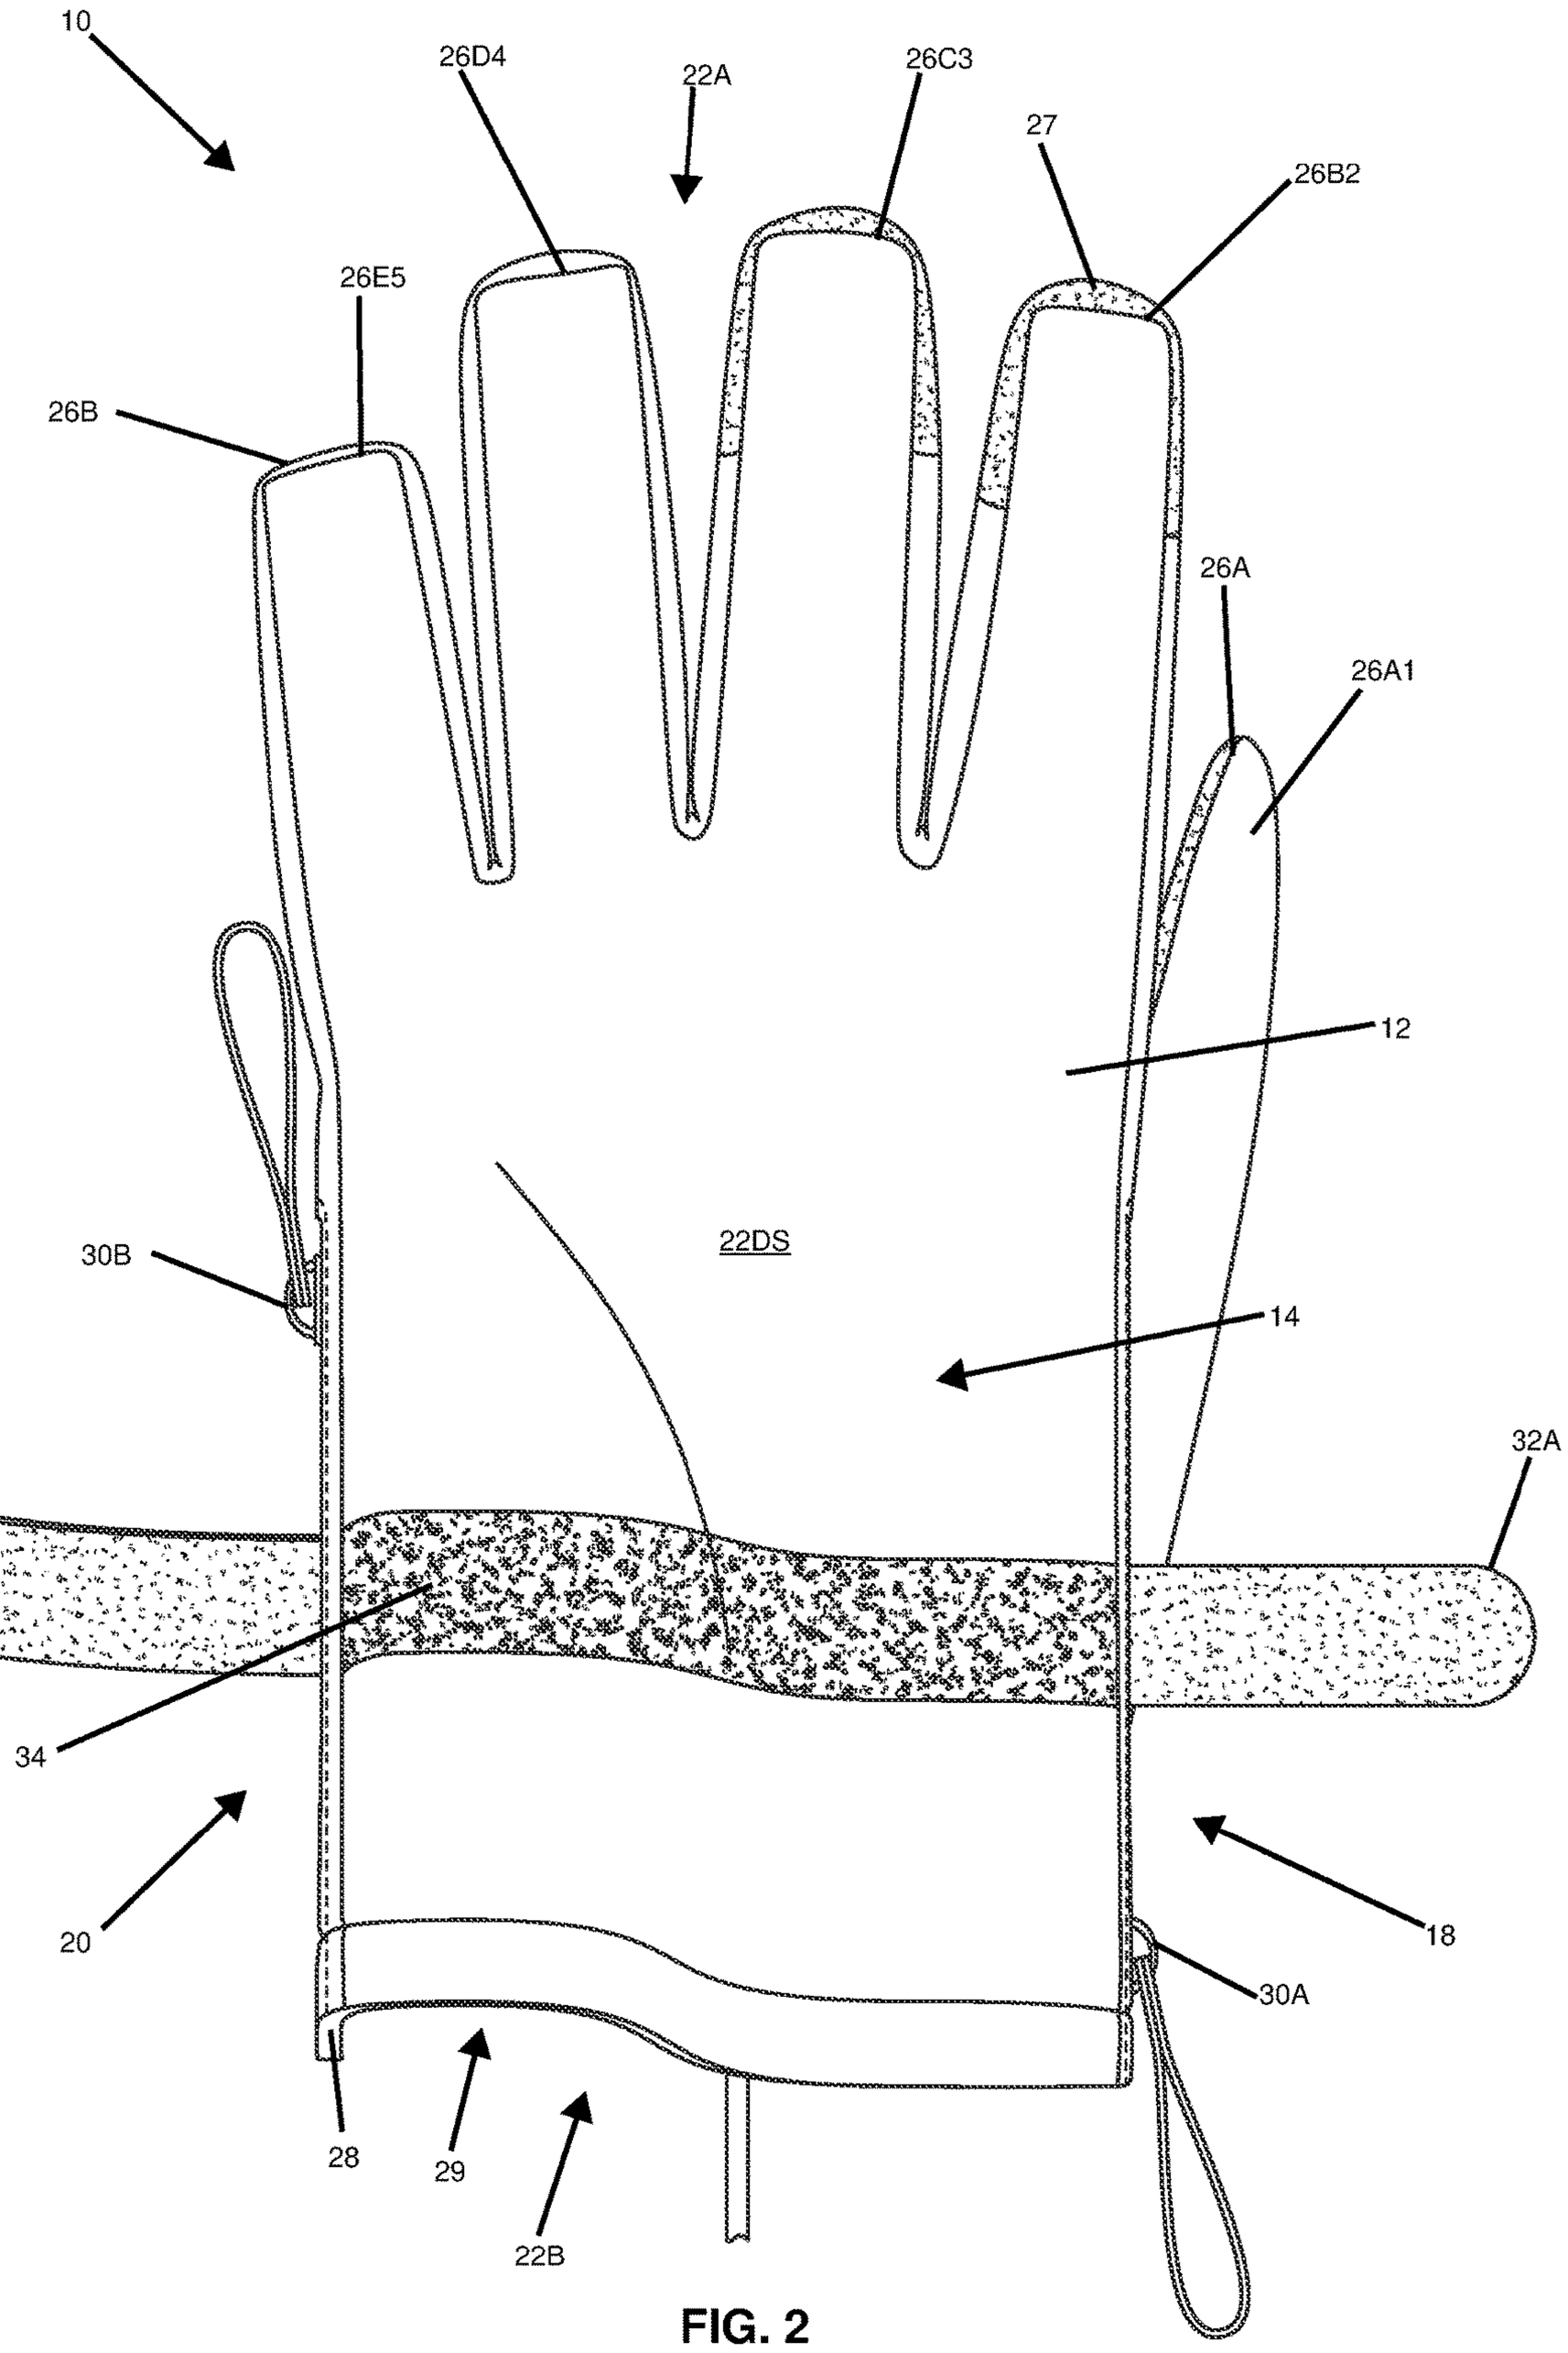
10
26D4
22A
26C3
27
26B2
26E5
26B
26A
26A1
12
22DS
30B
14
32B
32A
34
20
18
30A
28
29
22B

FIG. 2

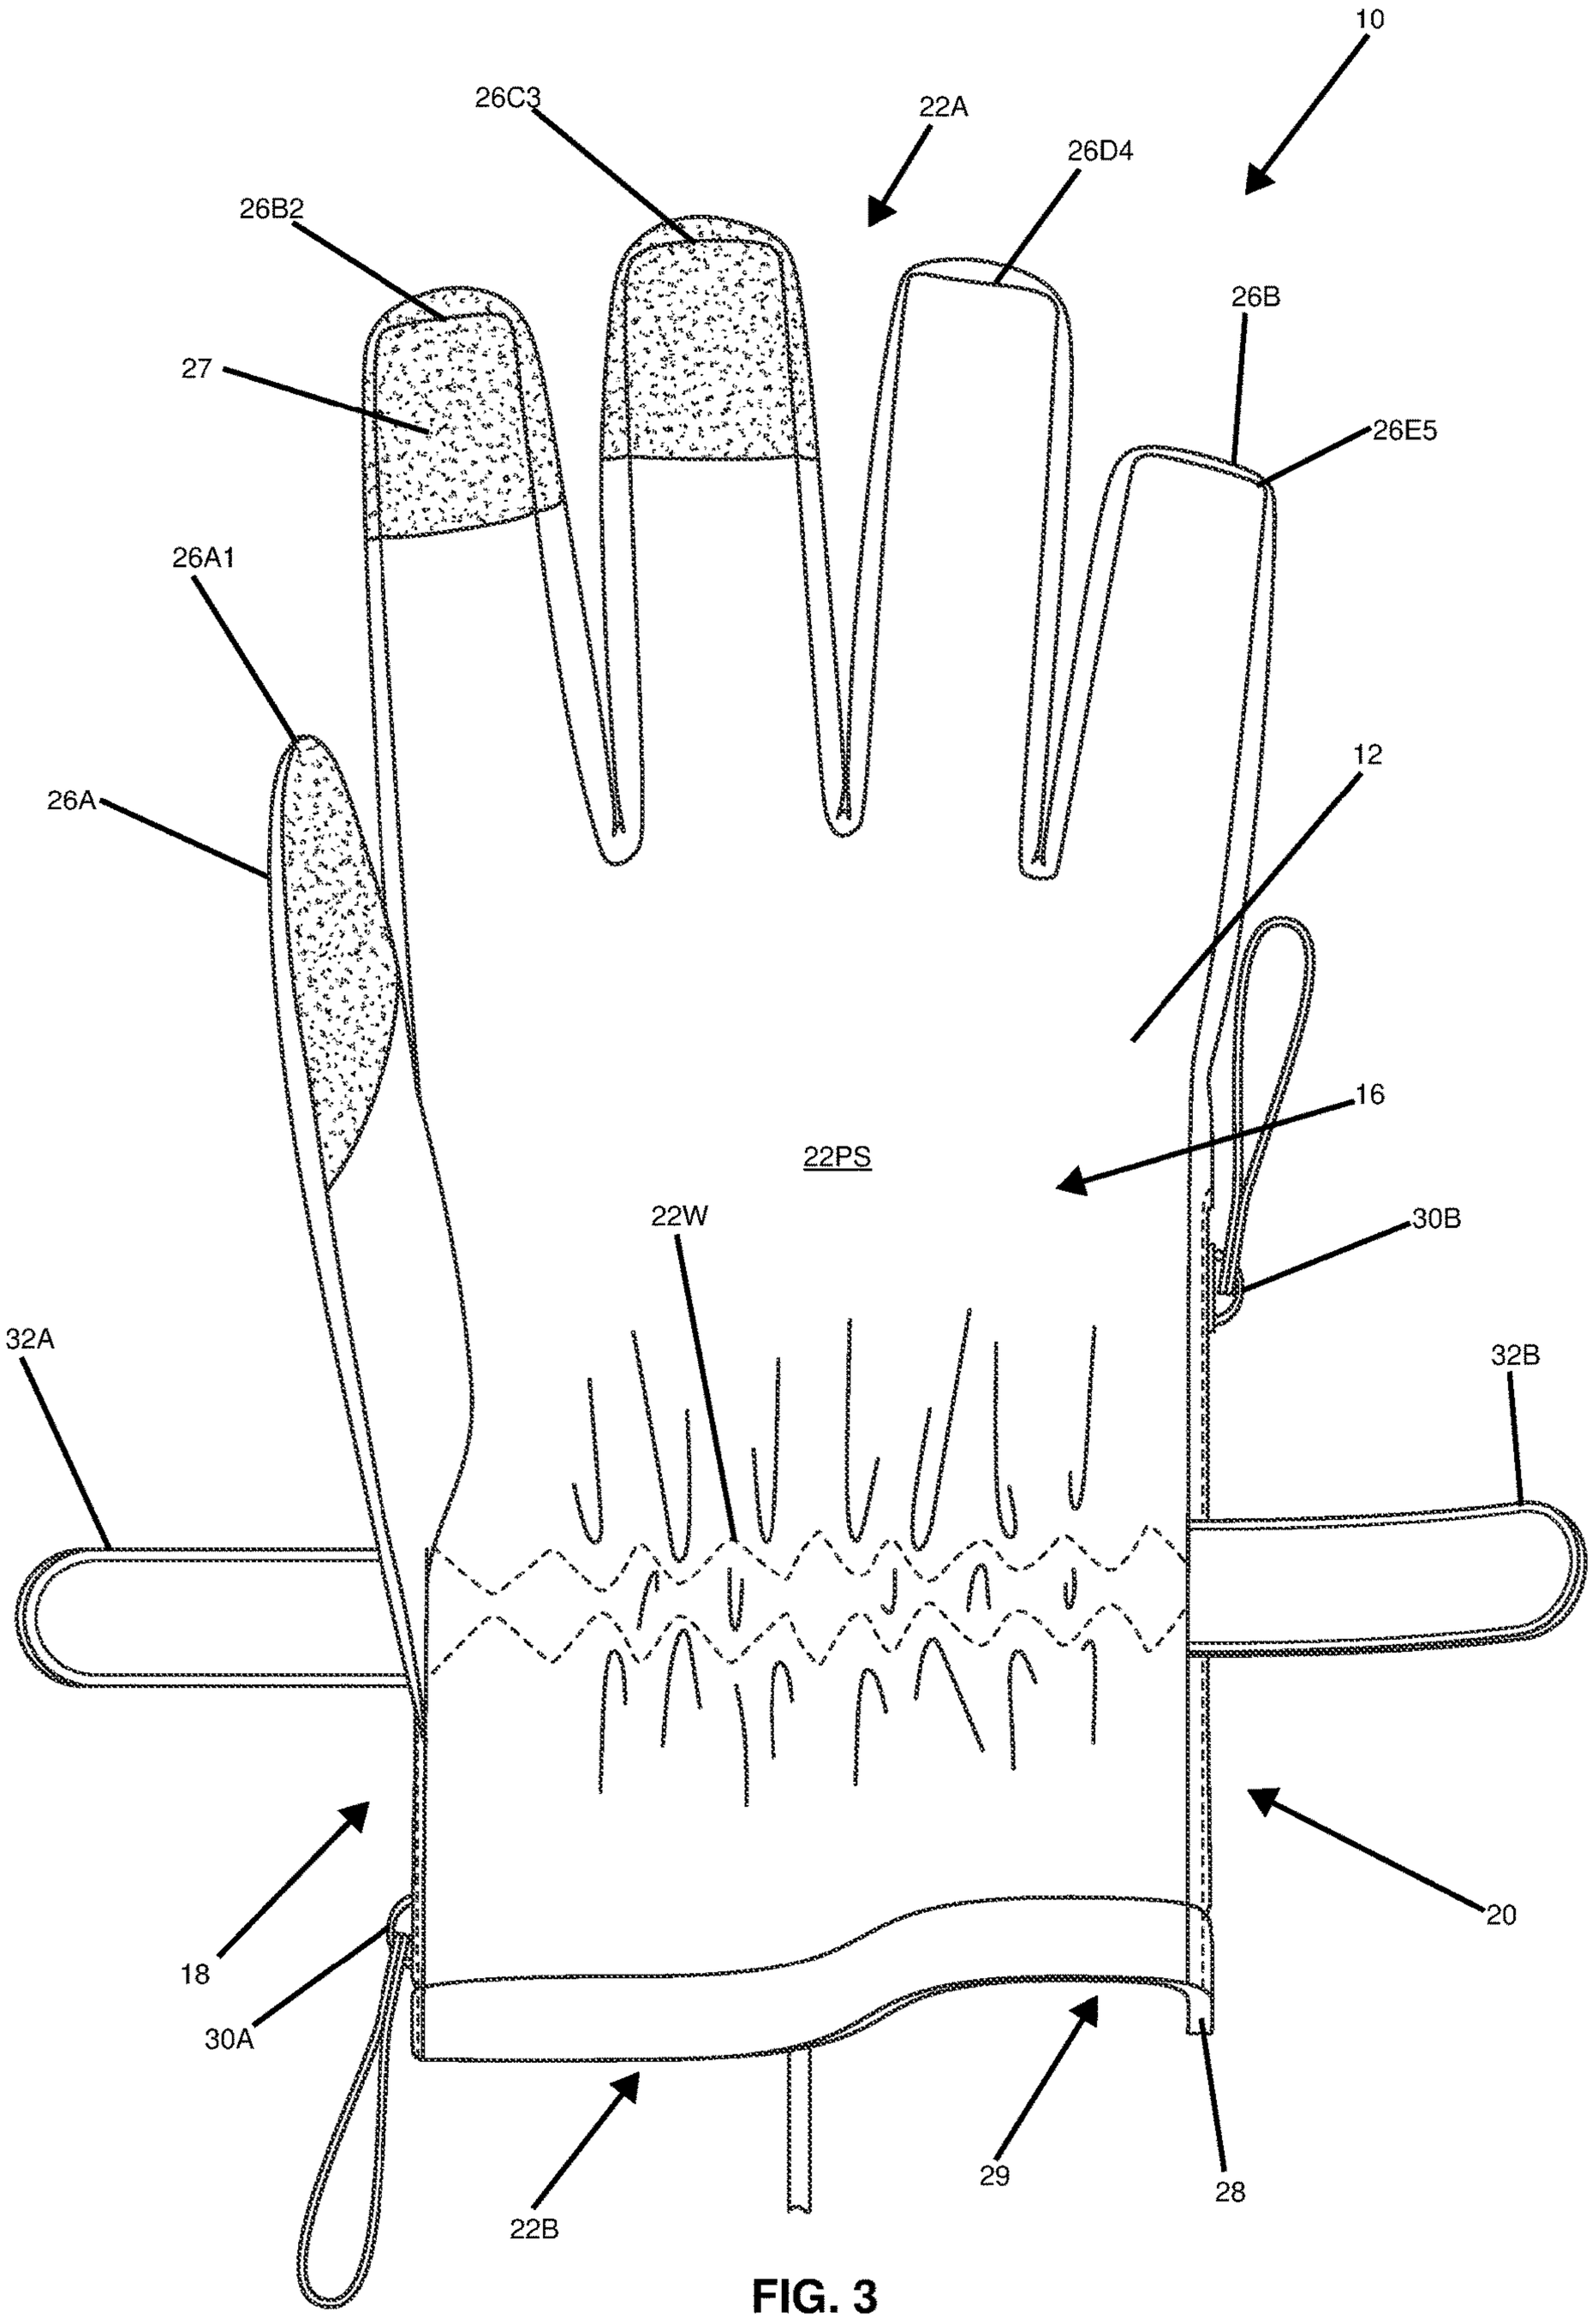
10
26C3
22A
26D4
26B2
26B
27
26E5
26A1
12
26A
16
22PS
22W
30B
32A
32B
18
20
30A
29
28
22B

FIG. 3

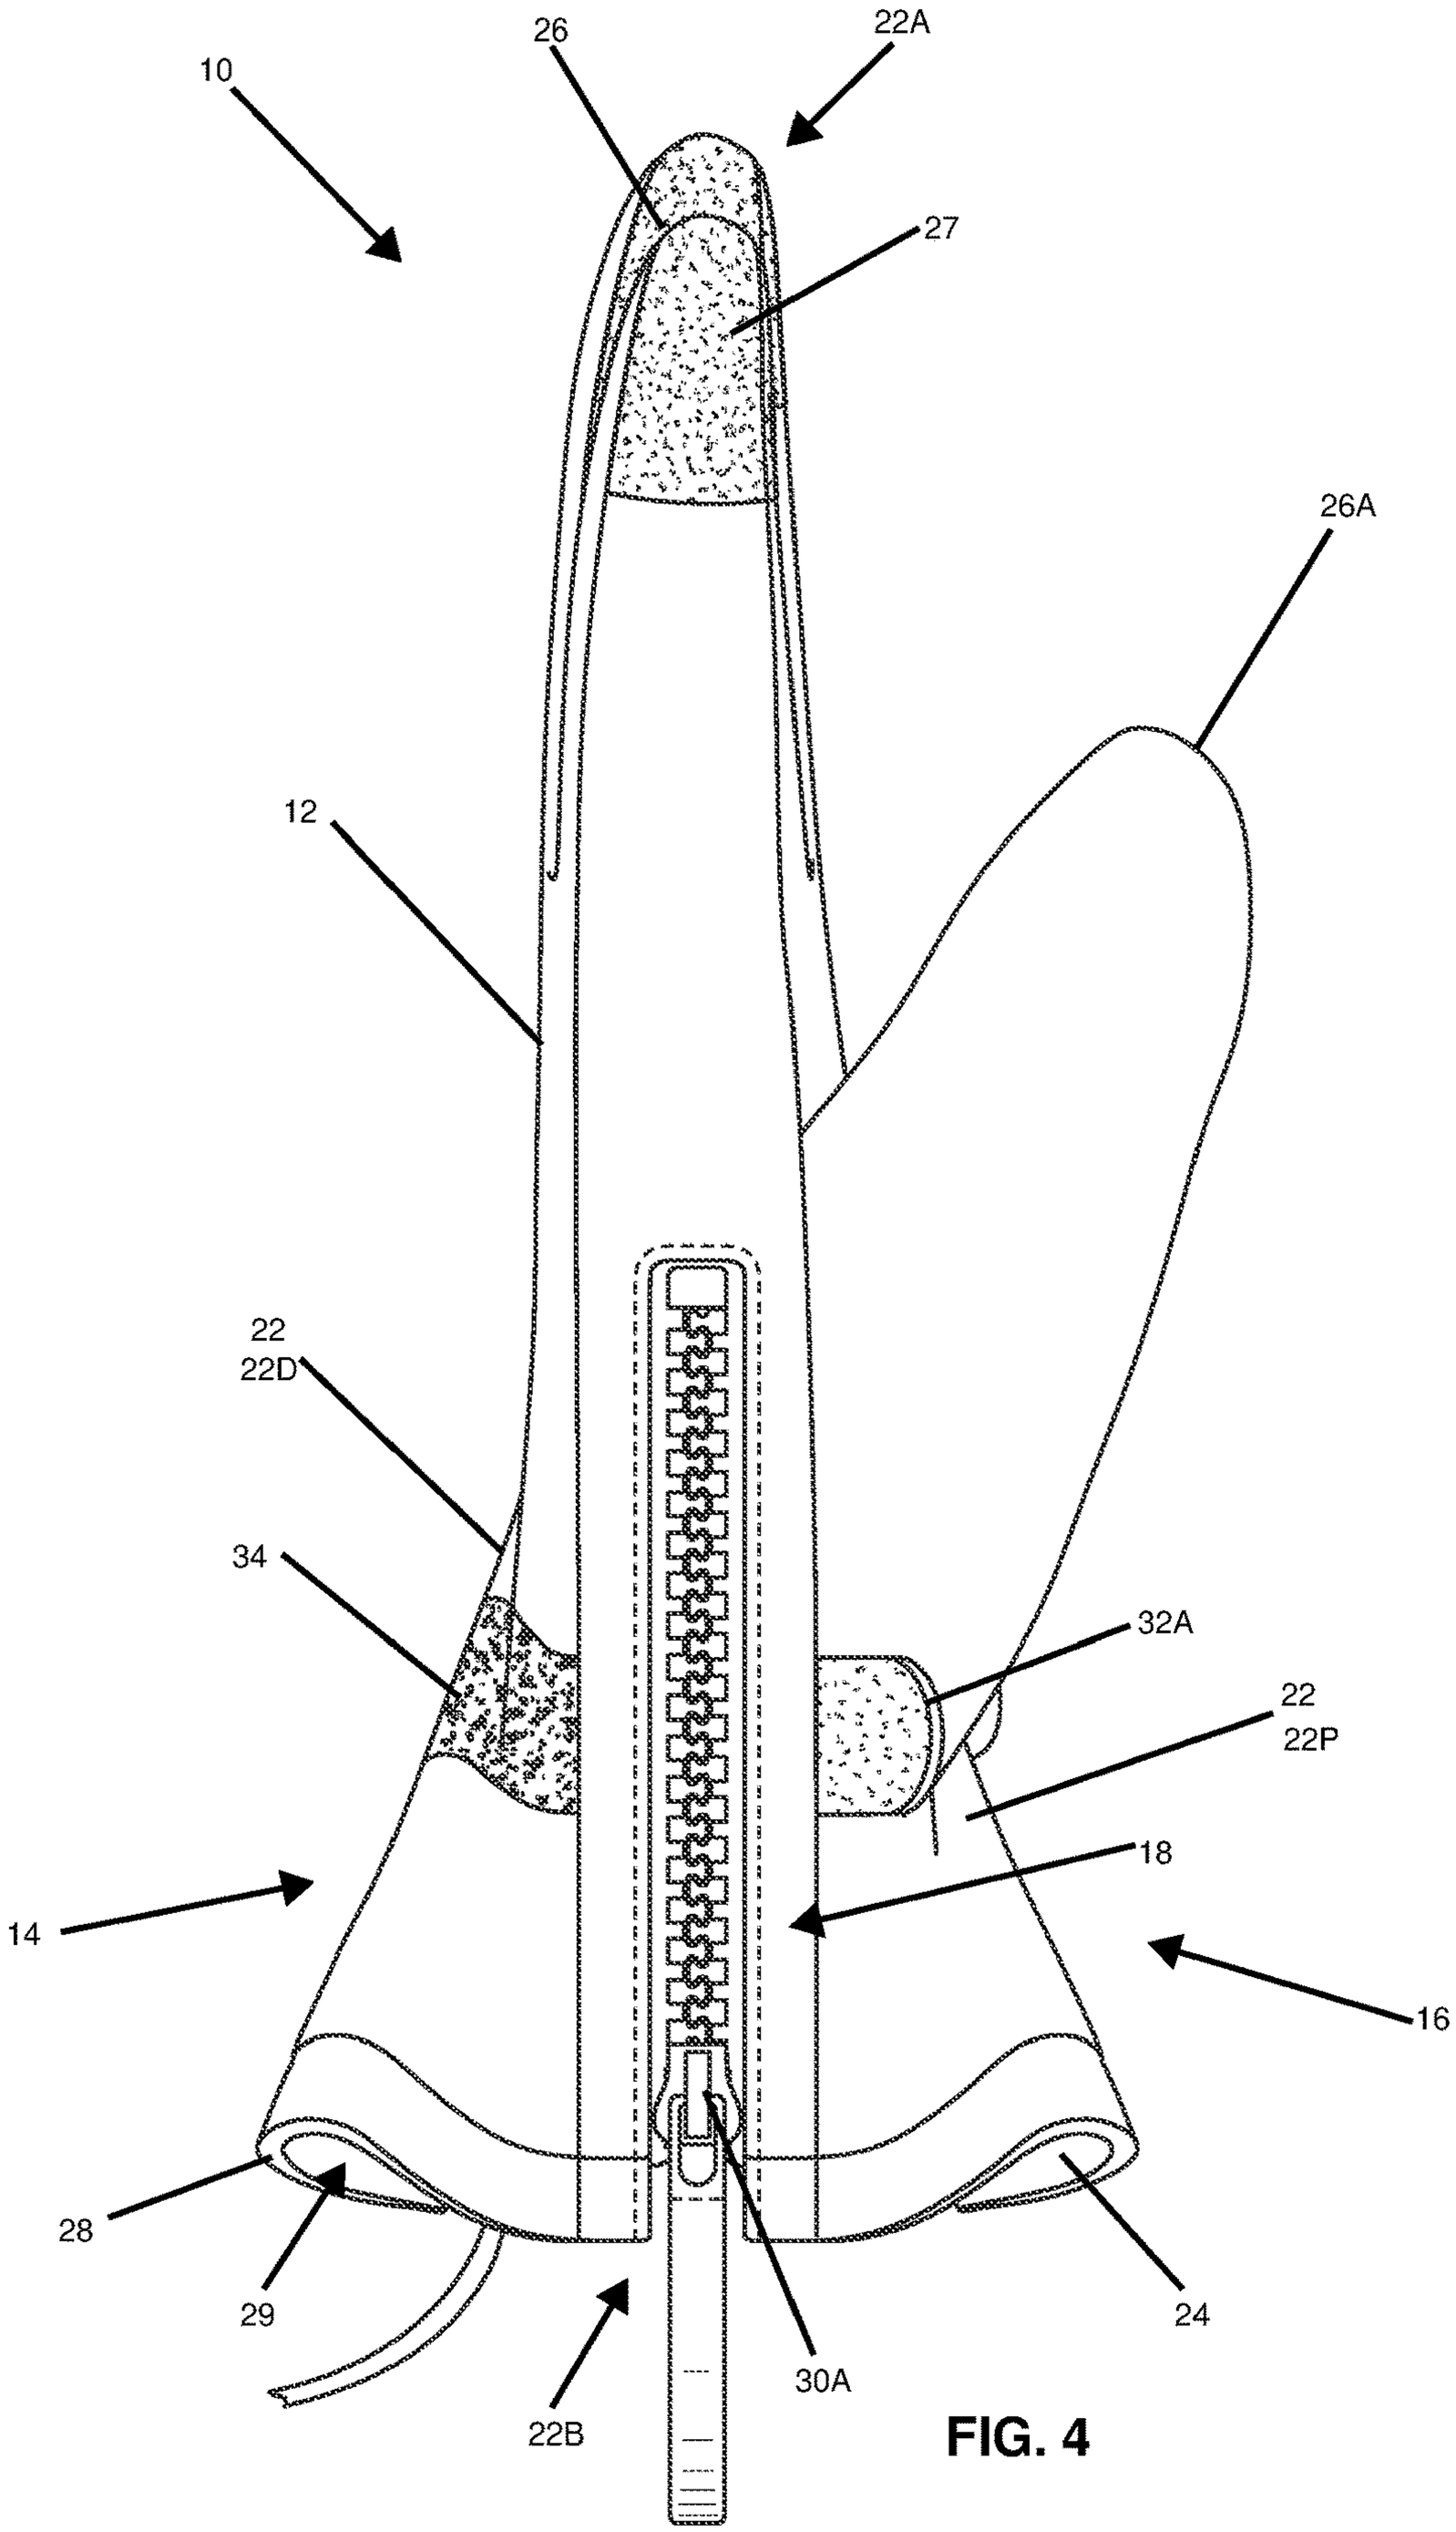

FIG. 4

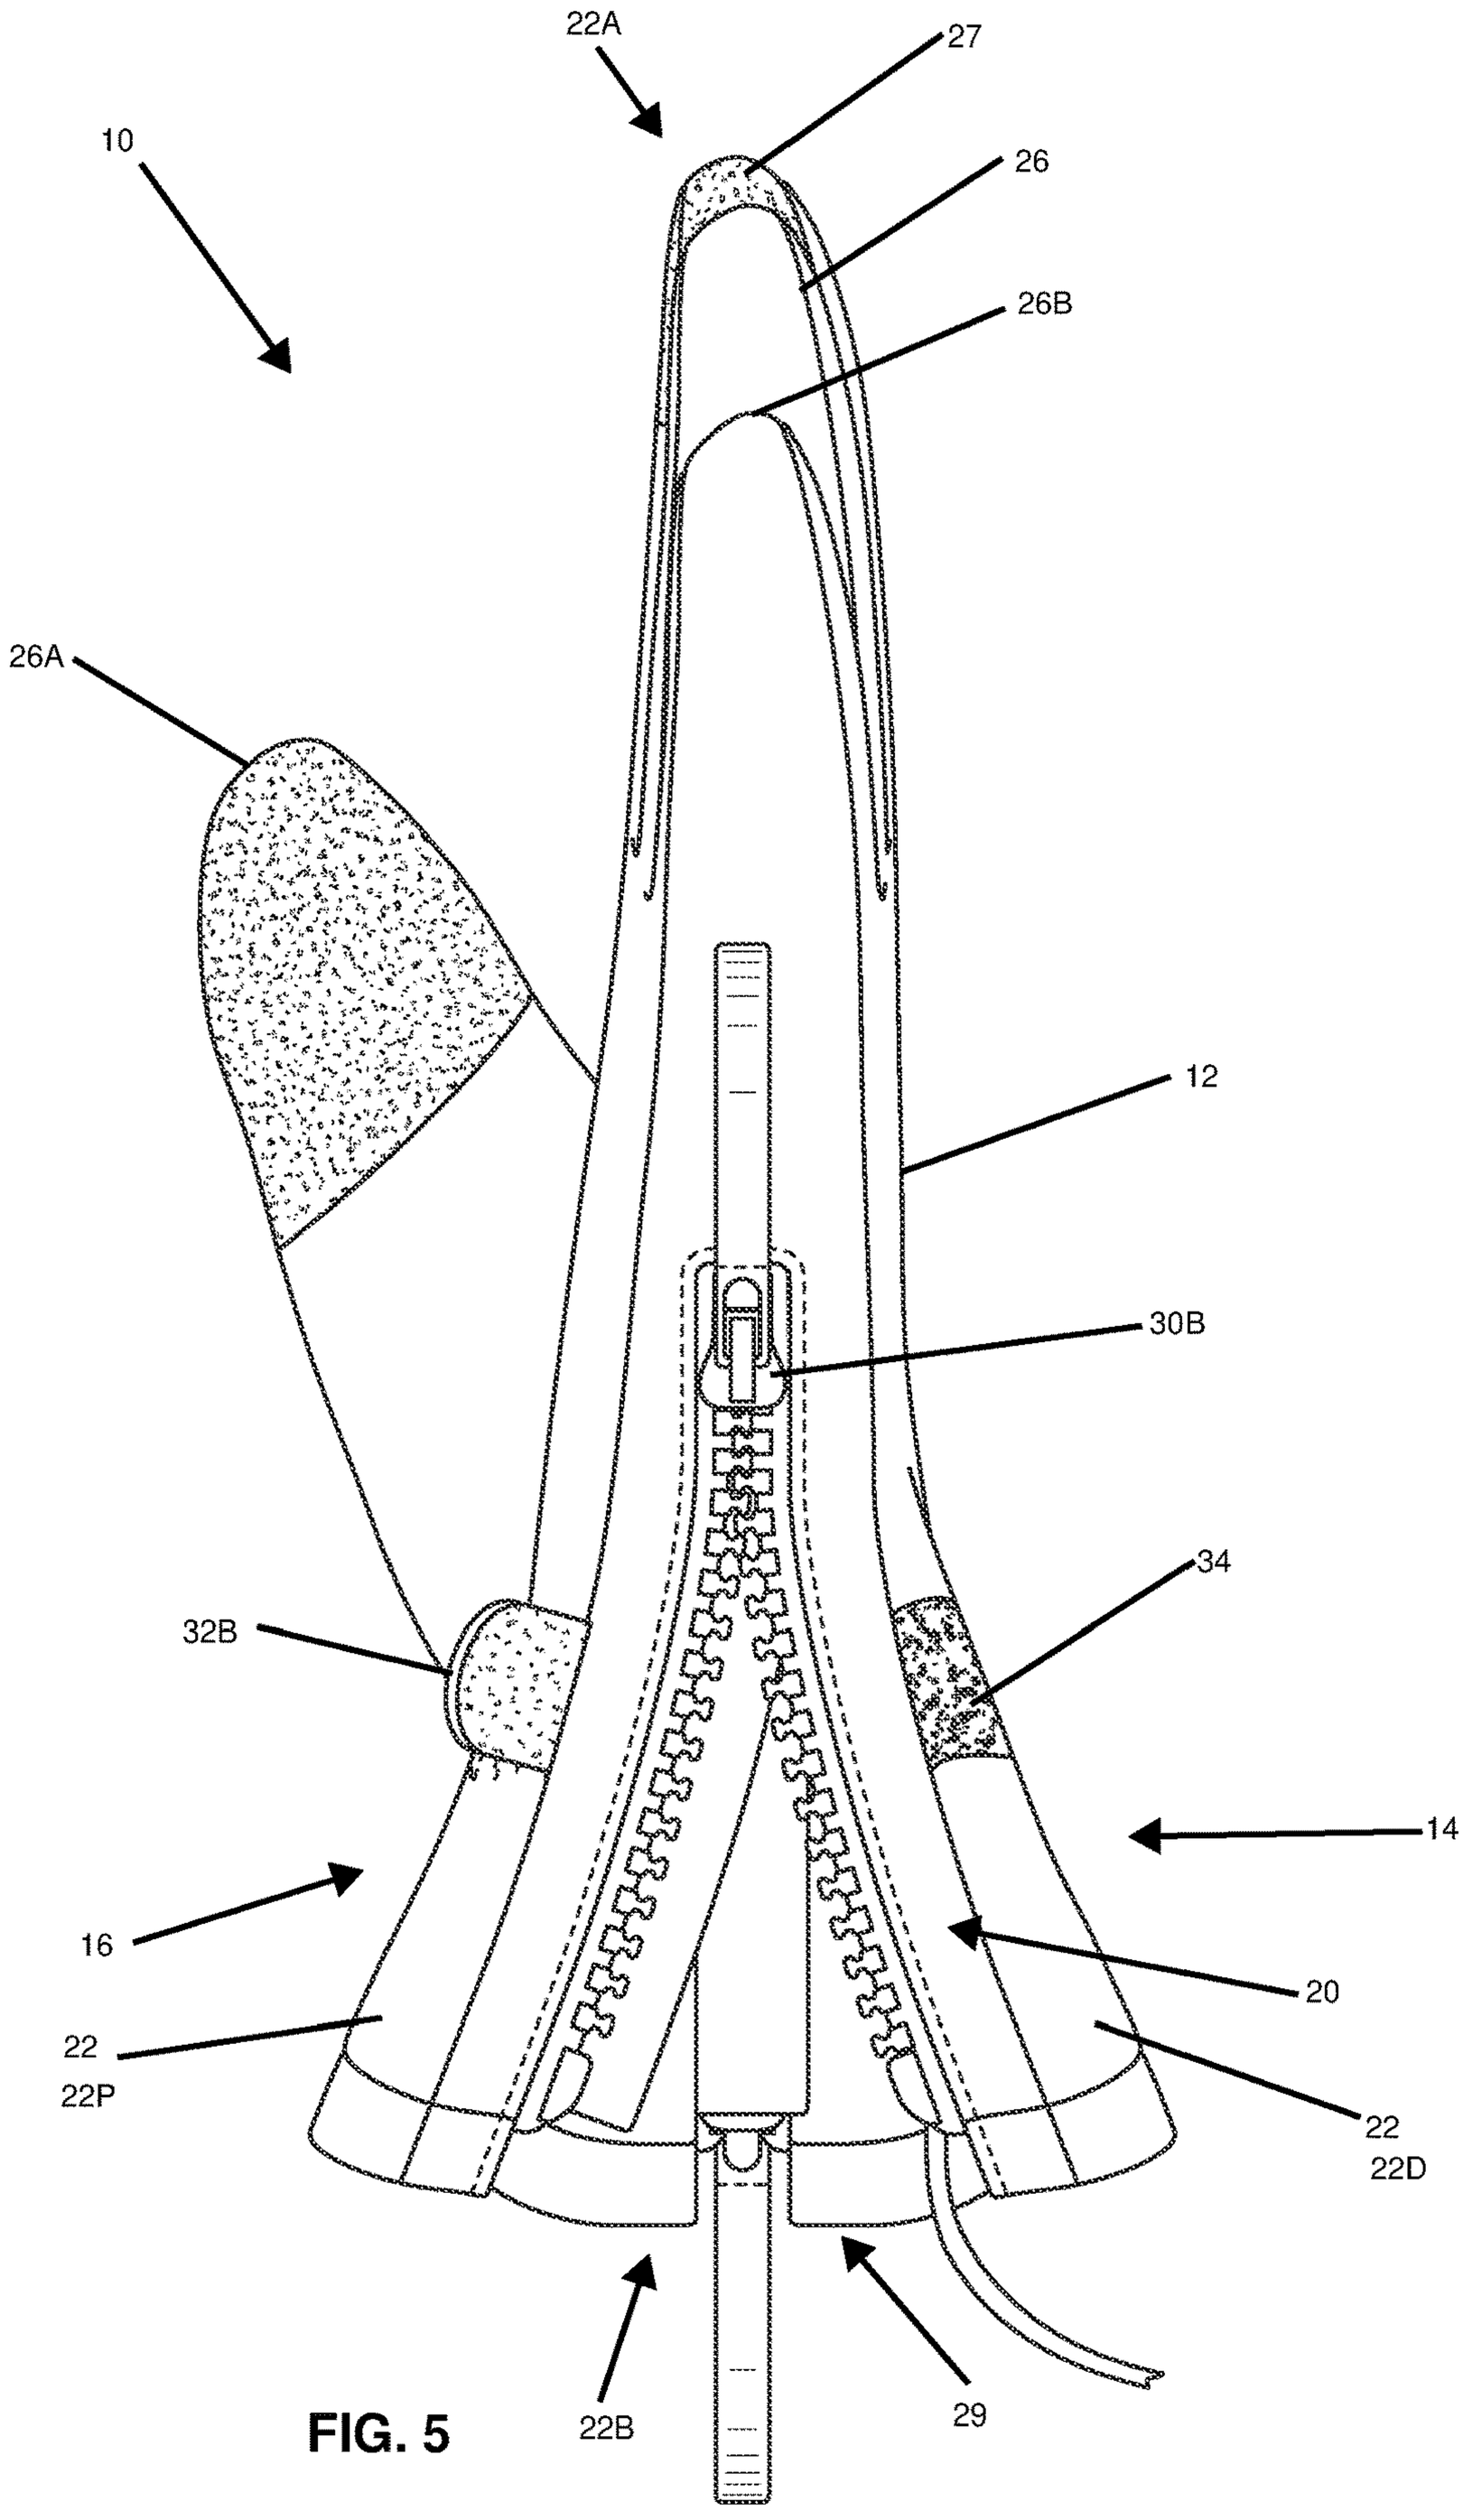

FIG. 5

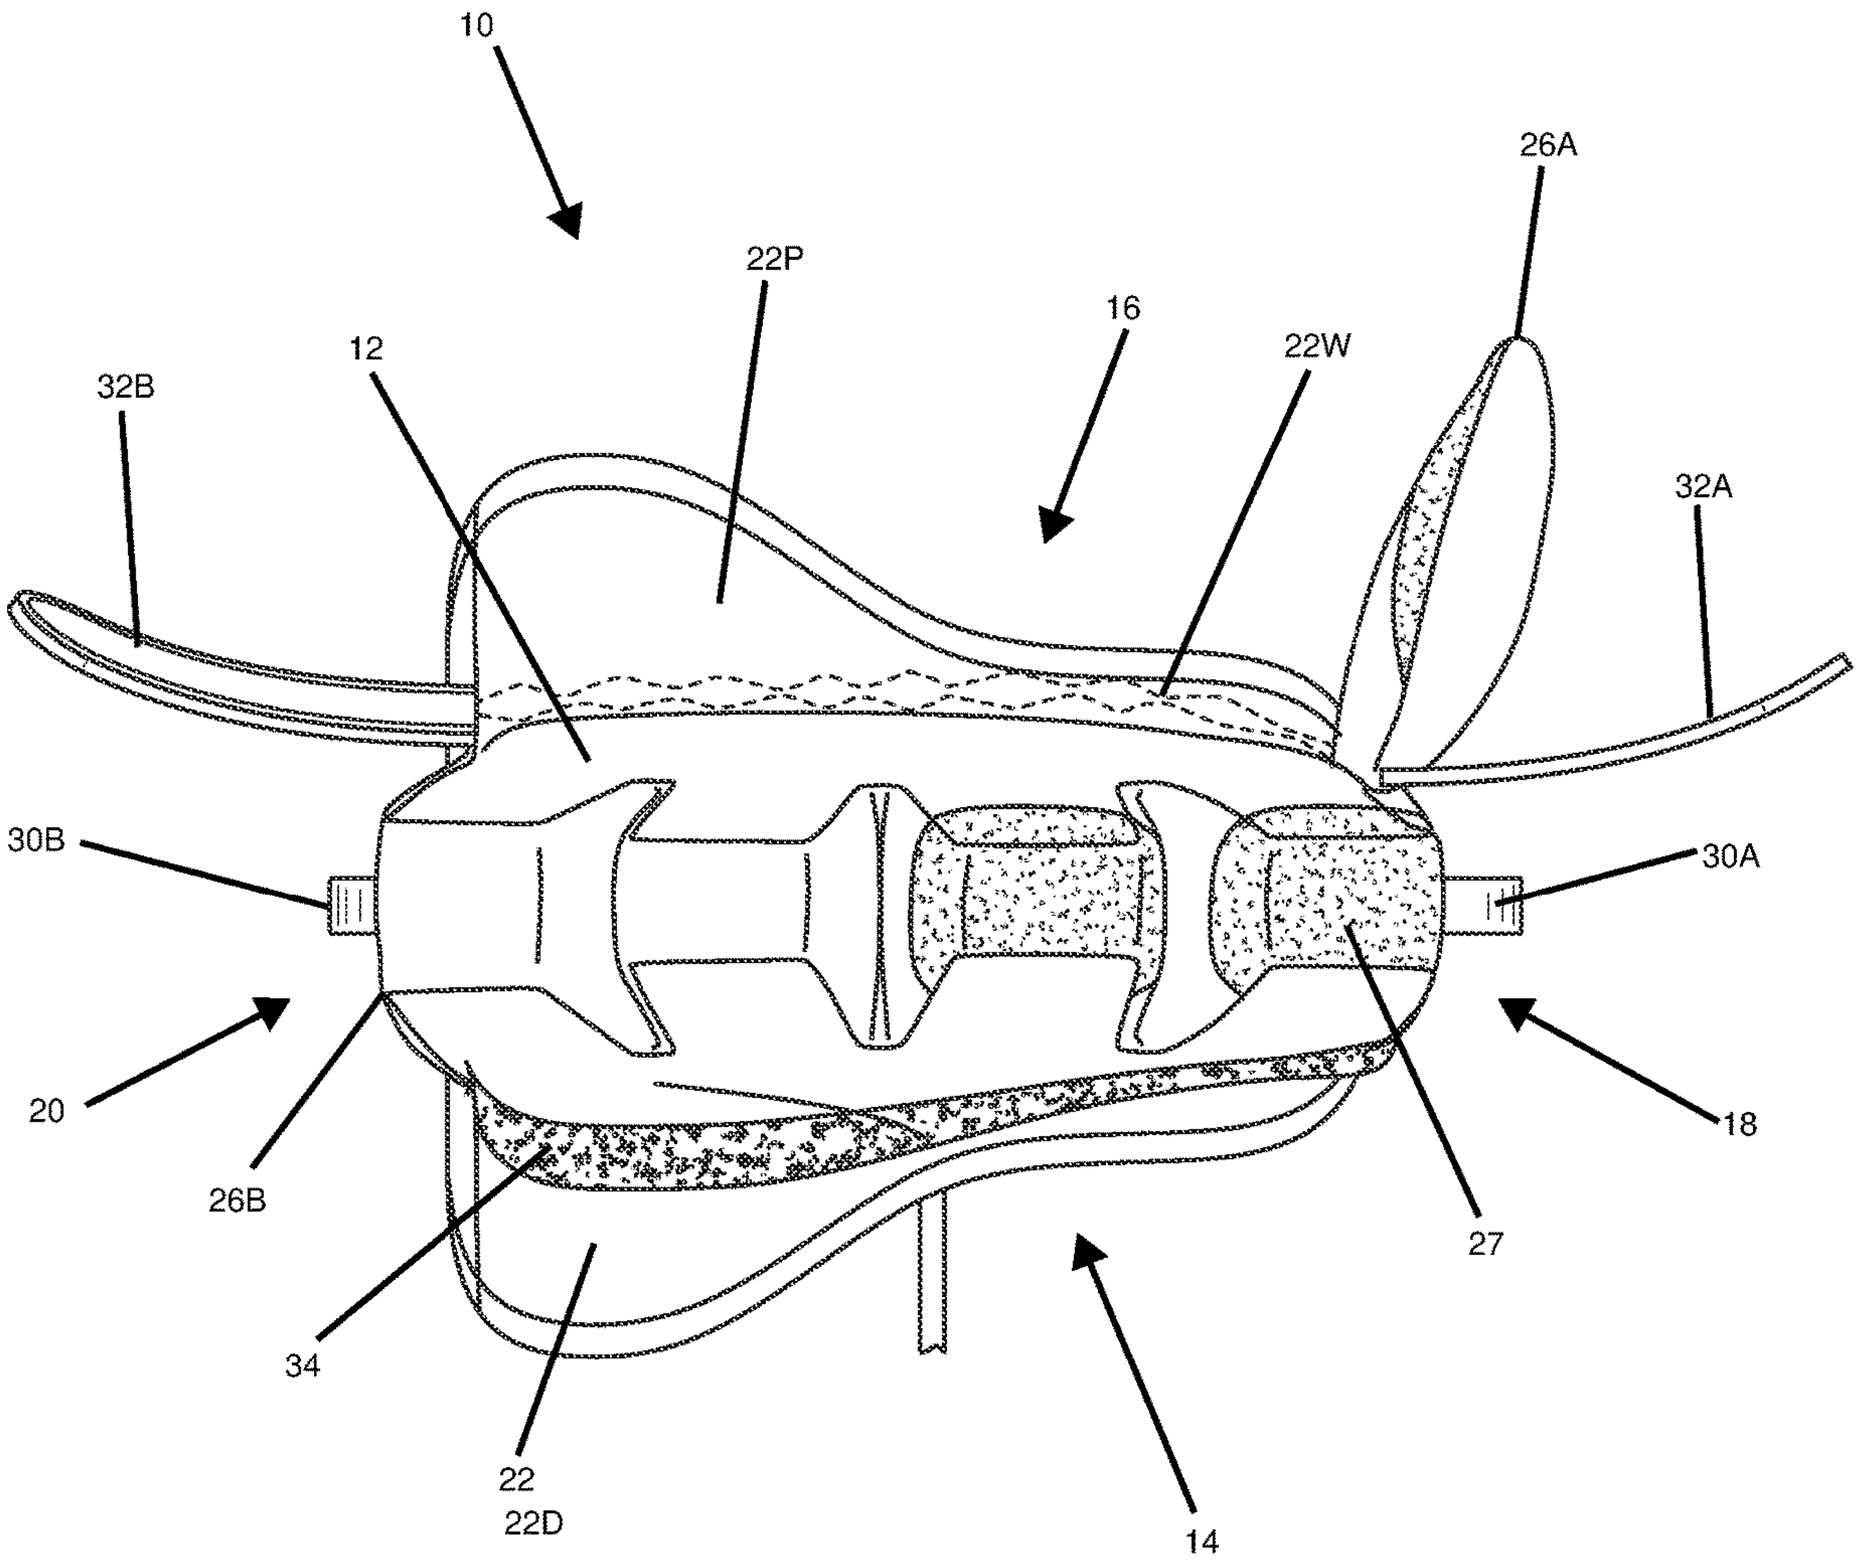

FIG. 6

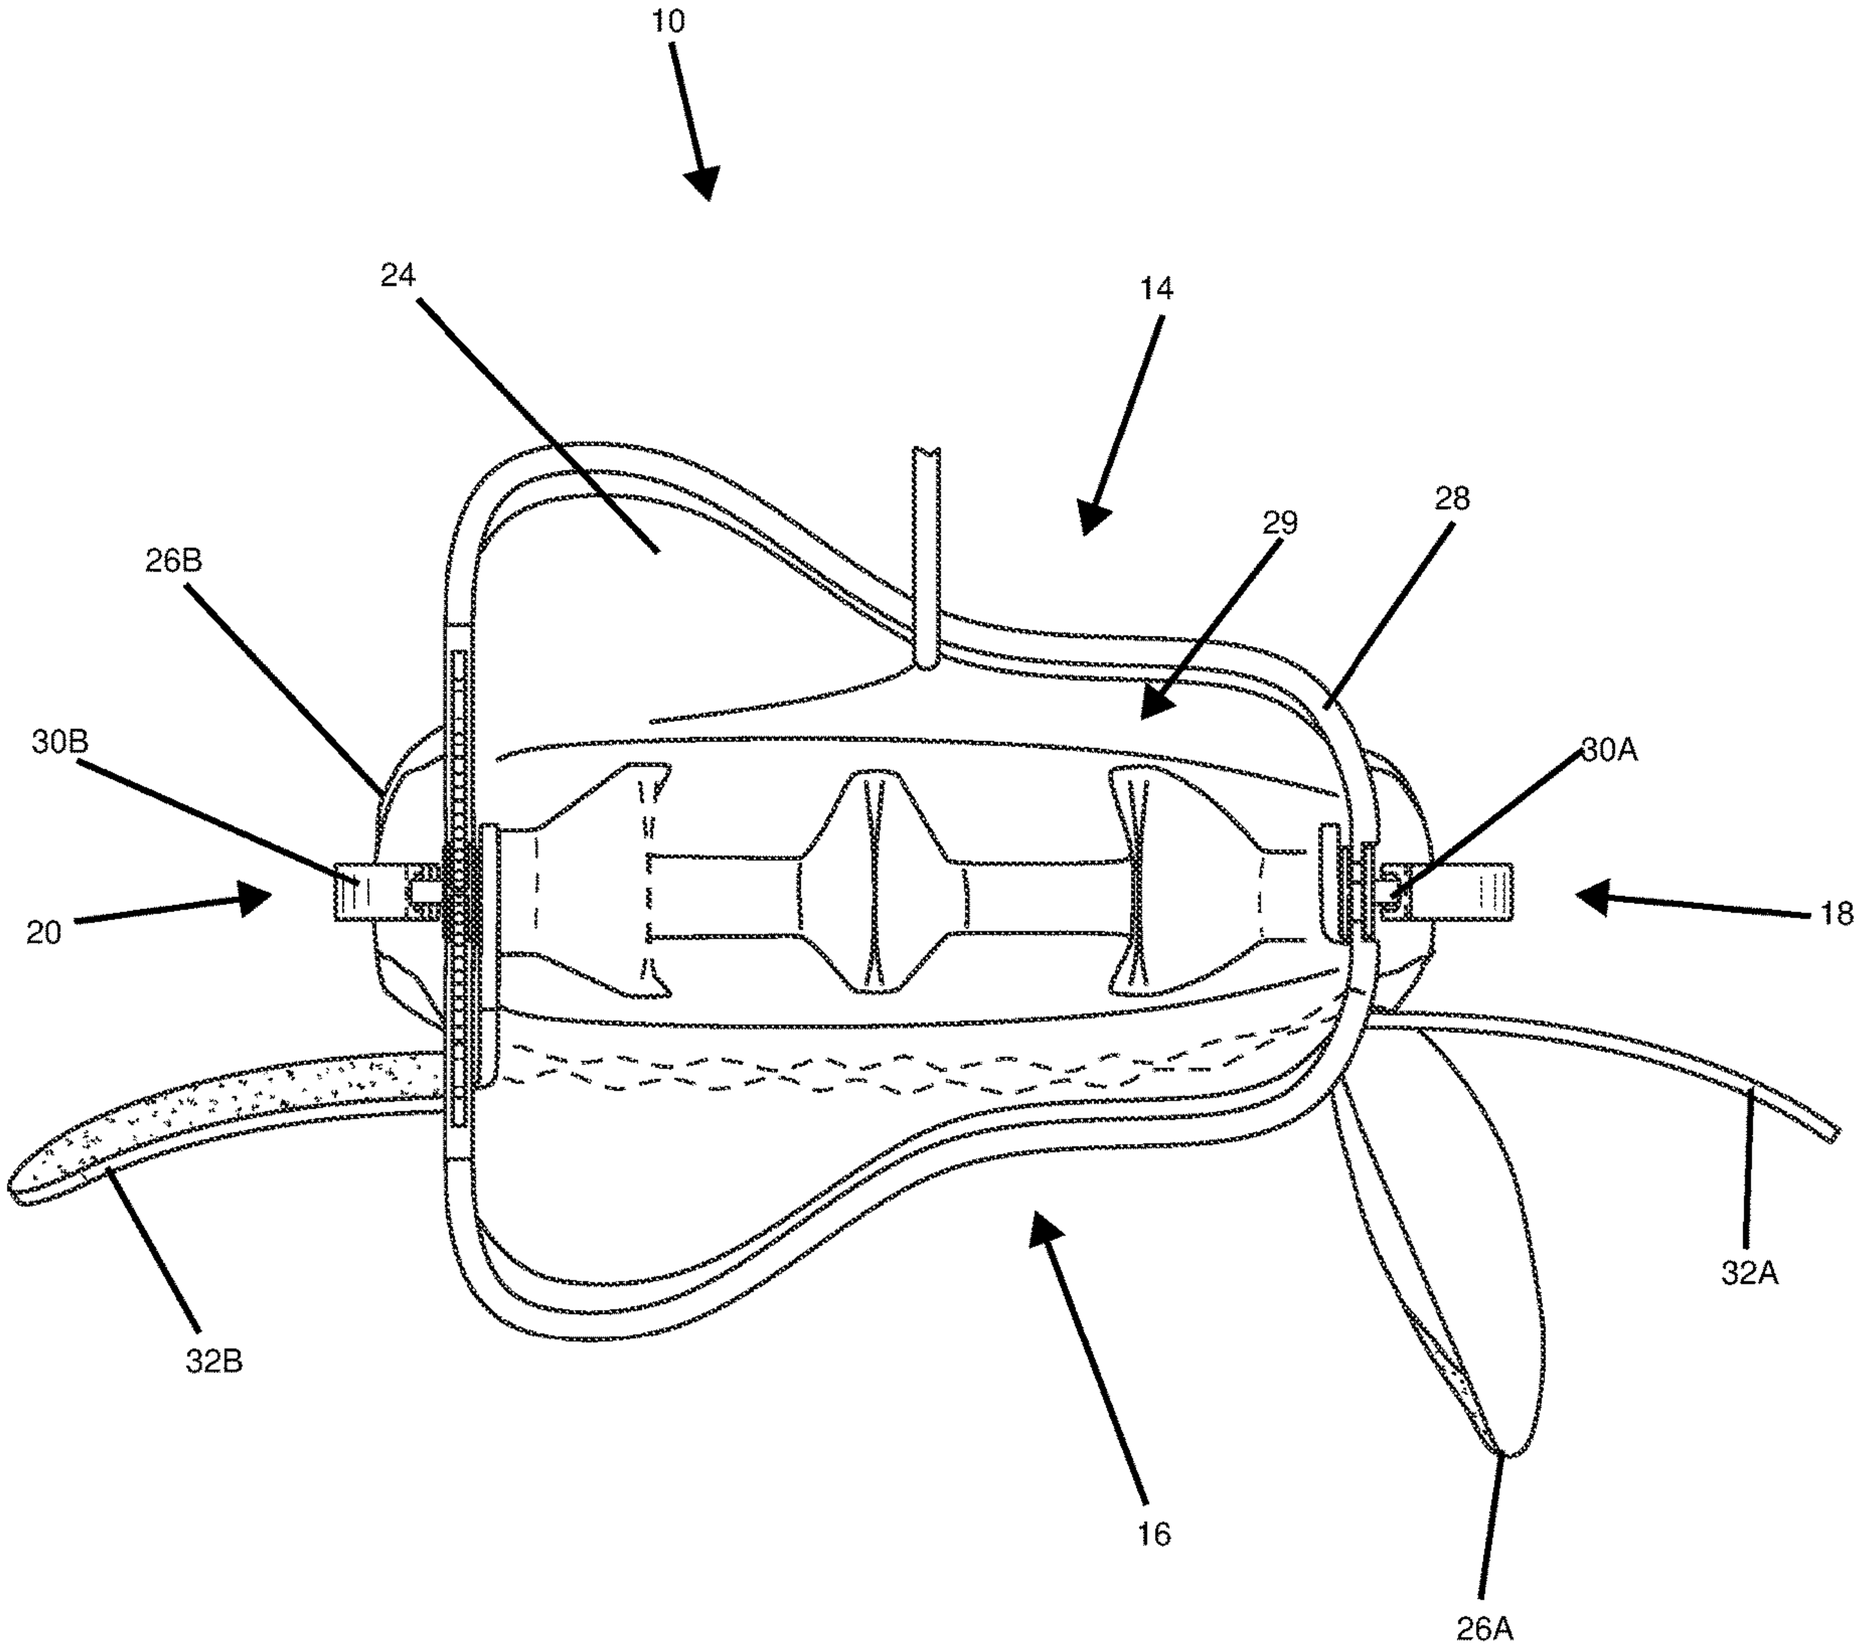

FIG. 7

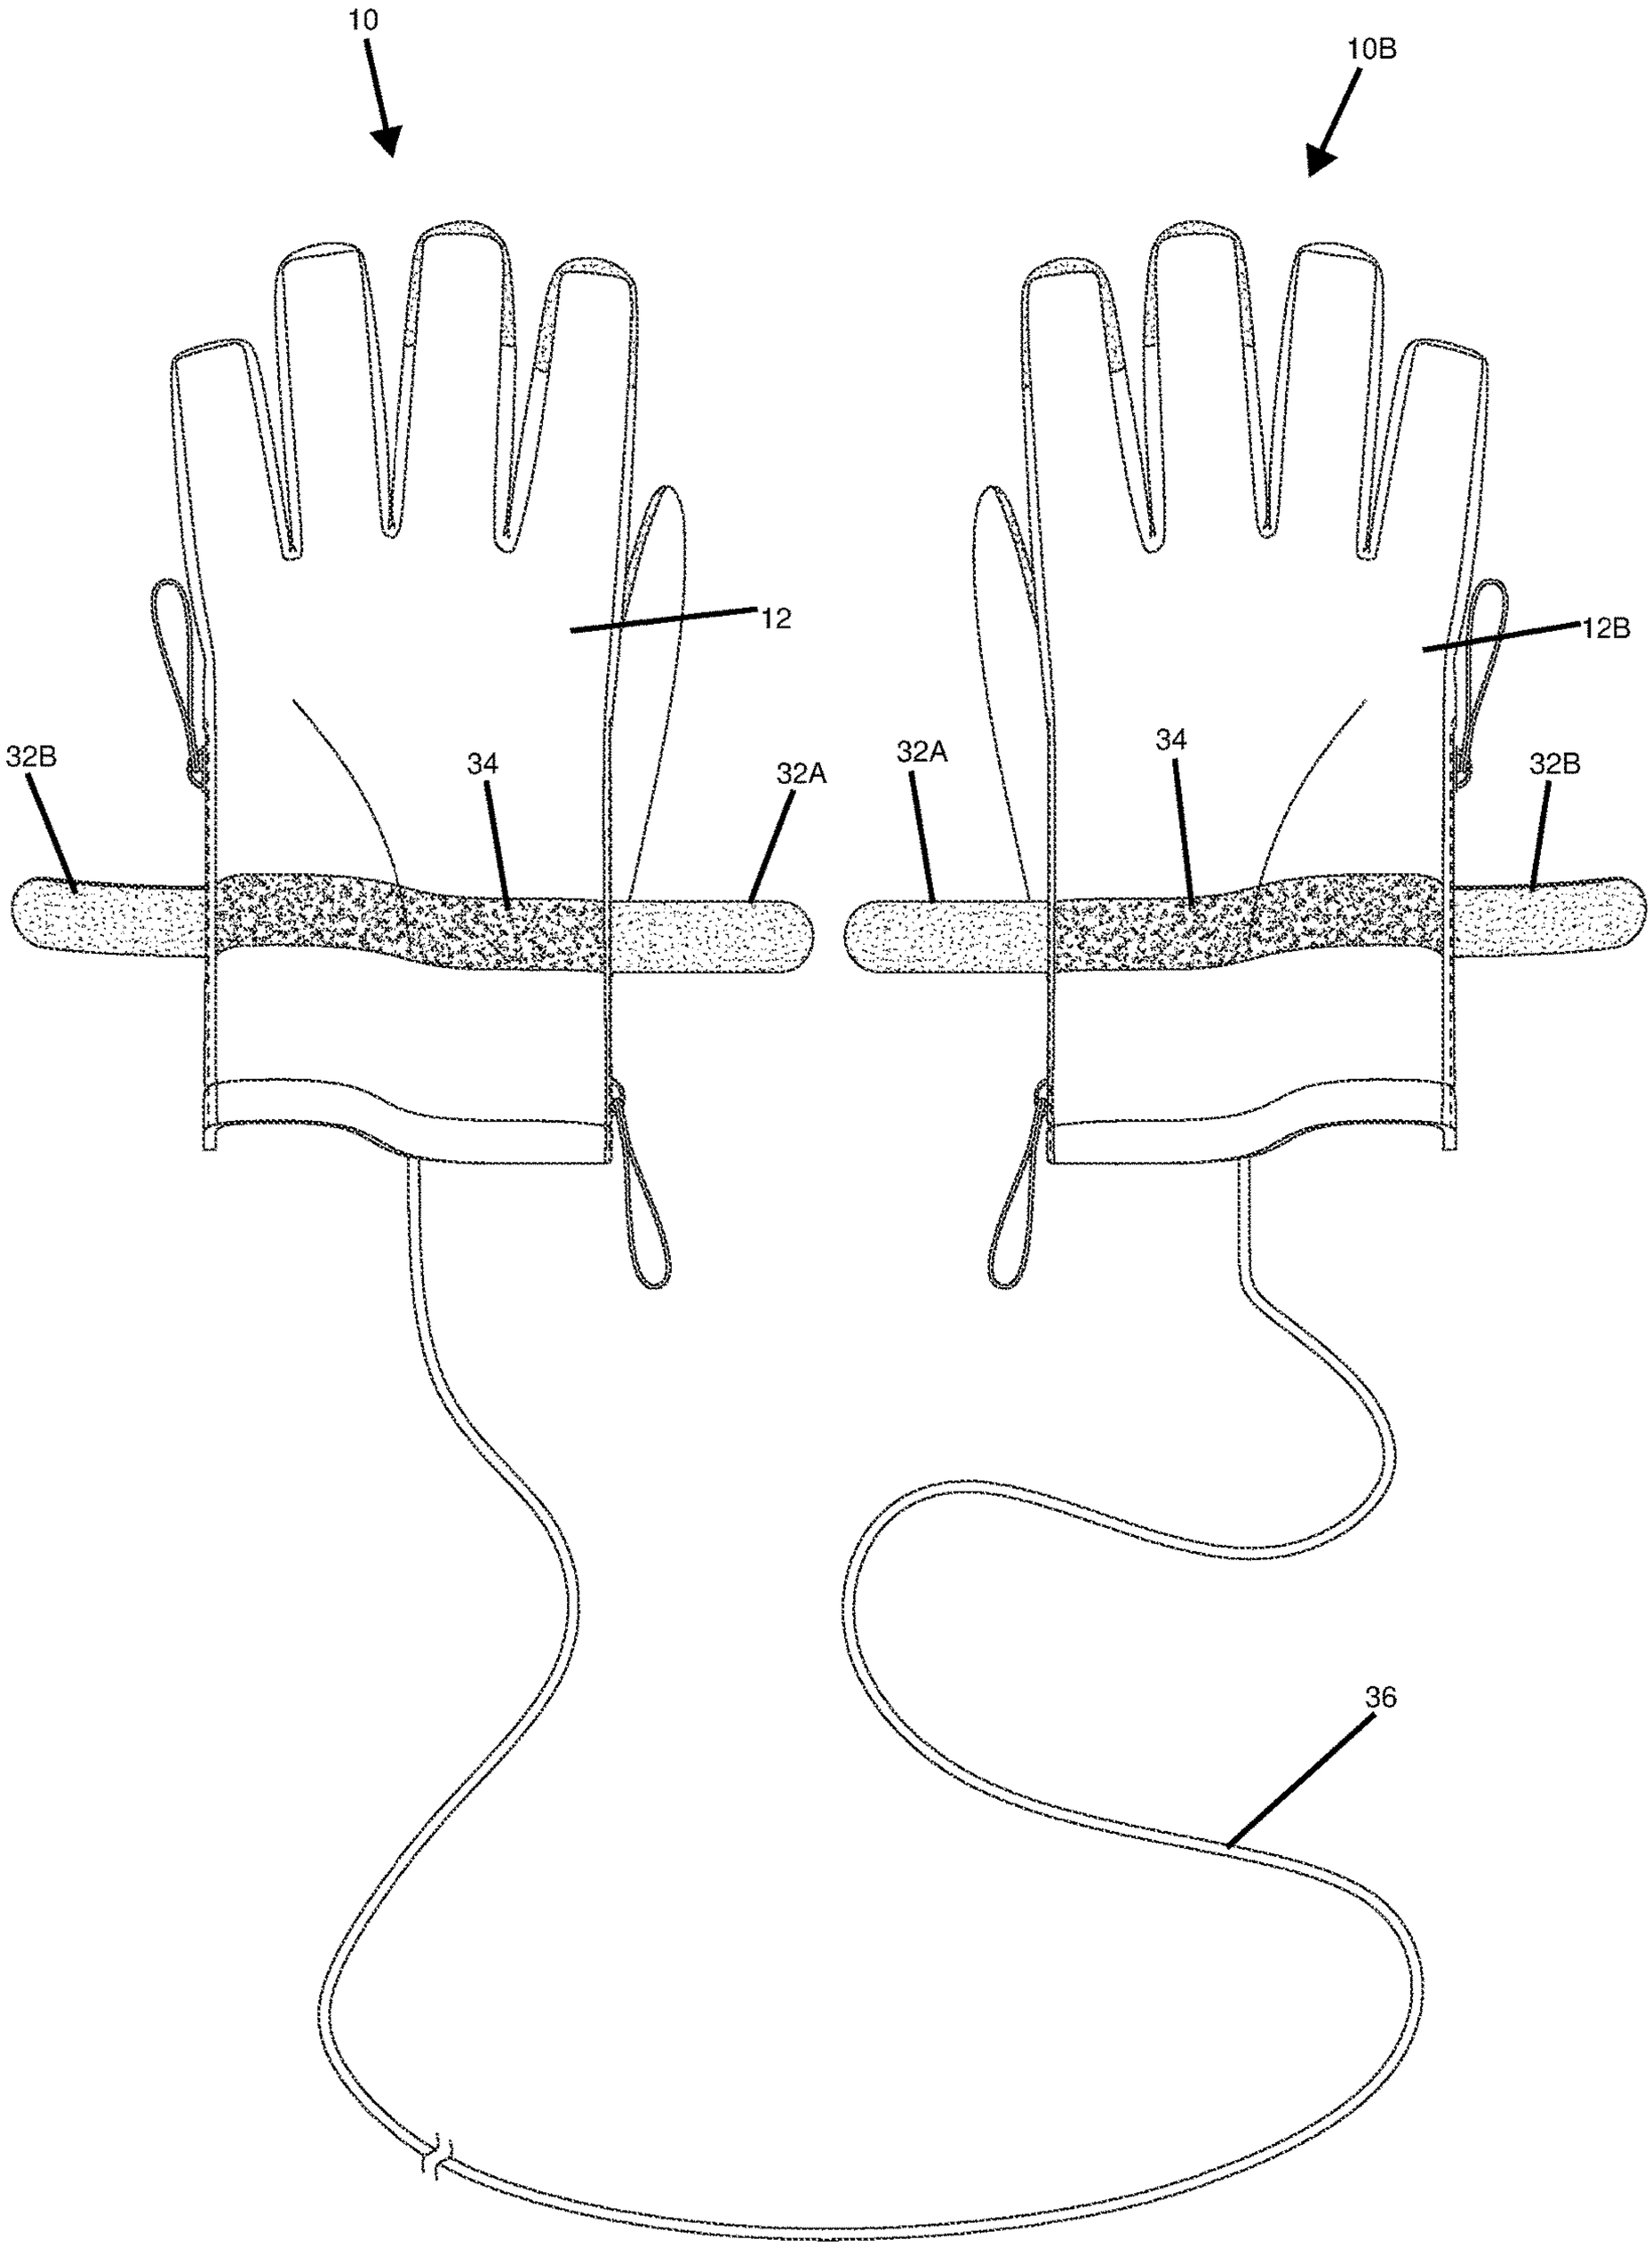

FIG. 8

HAND GLOVE WITH DUAL ZIPPERS

FIELD OF THE DISCLOSED TECHNOLOGY

The disclosed technology relates generally to hand glove. More specifically, the disclosed technology relates to a hand glove including dual zippers for facilitating the donning and doffing of the glove.

BACKGROUND OF THE DISCLOSED TECHNOLOGY

Children typically have a difficult time donning hand gloves. The hand openings at the bottoms of the hand gloves are often too narrow to enable a child to get their hand inside of the glove without help. If the child does ultimately get their hand inside the glove, they then have difficulty getting their fingers into the proper digit sheaths of the glove. This is owing to glove's compressive nature as they are typically tight-fitting and elastically biased toward the user's hand. If the hand opening is made too big or the glove is not tight-fitting then the glove will fall off children's hands easily.

Children however are pretty good at operating zippers and fastening straps, such as Velcro. Accordingly, there is a need for a hand glove including dual zippers and a fastening strap that enable a child to don and doff a hand glove and tighten the glove around his or her hand when donned more easily.

SUMMARY OF DISCLOSED TECHNOLOGY

The disclosed technology provides a hand glove including a glove body having a dorsal side, a palmar side, the dorsal side opposite the palmar side, a radial side, an ulnar side, the radial side opposite the ulnar side, a hand portion defining an interior cavity configured to receive and cover the hand of a wearer, the hand portion including a palm section on the palmar side, a dorsal section on the dorsal side, an upper end including a plurality of digit sheaths protruding outwardly therefrom, and a lower end including a peripheral edge defining an opening for providing access to the interior cavity of the glove body. The hand portion extends from the radial side to the ulnar side. The plurality of digit sheaths include at least a first sheath corresponding to the first digit of a wearer's hand and second sheath corresponding to one or more of the other digits of a wearer's hand. The radial side includes a first zipper and a first fastening strap extending outwardly therefrom. The ulnar side includes a second zipper and a second fastening strap extending outwardly therefrom. The first zipper is parallel with and opposite to the second zipper. The dorsal side includes a fastener spanning the dorsal section. The first fastening strap and the second fastening strap are configured to removably attach to the fastener to secure the glove body to a wearer's hand.

In embodiments, the first zipper and second zipper are coplanar with respect to each other defining a hypothetical plane that divides the glove body in half along a coronal plane of the glove body, thereby separating and defining the dorsal section and the palm section.

In some embodiments, the first zipper extends longitudinally along the radial side from the peripheral edge of the hand portion to the first sheath and the second zipper extends longitudinally along the ulnar side from the peripheral edge of the hand portion to the second sheath.

In certain embodiment, the first zipper includes a length smaller than a length of the second zipper.

In other embodiments, the first zipper includes a length substantially equal to a length of the second zipper.

In embodiments, the first fastening strap is disposed on the palm section of the hand portion midway along a length of the zipper and is configured to lay over the first zipper when attached to the fastener, thereby preventing the first zipper from becoming unzipped. The second fastening strap is disposed on the palm section of the hand portion midway along a length of the zipper and is configured to lay over the second zipper when attached to the fastener, thereby preventing the second zipper from becoming unzipped.

In some embodiments, the fastener comprises a strip of fastening material extending laterally across the dorsal section from the first zipper to the second zipper.

In certain embodiments, the first fastening strap and the second fastening strap comprise a hook and loop fastening material and the fastener comprises a corresponding hook and loop fastening material to enable attachment and disengagement.

In embodiments, the first zipper opens from the peripheral edge to the first sheath enlarging the opening on the lower end of the hand portion at the radial side and the second zipper opens from the peripheral edge to the second sheath enlarging the opening on the lower end of the hand portion at the ulnar side.

In some embodiments, the hand portion includes a first depth at the radial side and a second depth at the ulnar side, wherein the second depth is larger than the first depth.

In certain embodiments, the palm section includes a wrinkled section extending from the first zipper to the second zipper. The wrinkled section opposite the fastener enabling scrunching of the palm section when the first fastening strap and the second fastening strap are attached to the fastener.

In embodiments, the first fastening strap, the second fastening strap, the fastener, and the wrinkled section are coplanar and aligned.

In some embodiments, the first fastening strap and the second fastening strap include substantially the same length and width.

In certain embodiments, the first fastening strap, the second fastening strap, and the fastener include substantially the same width.

"Dorsal" refers to "of, on, or relating to the upper side or back of an animal, plant, or organ, such as the back of a hand". "Palmar" refers to "relating to the palm of a hand." "Radial" refers to "the side of a hand including the thumb or first digit." "Ulnar" refers to "the side of a hand including the pinker finger or fifth digit." "Digit" refers to "a finger or toe including the thumb." "Coronal plane" refers to "any vertical plane that divides the body, or organs thereof, into ventral (underside or front) and dorsal (upper side or back) sections.

Any device or step to a method described in this disclosure can comprise or consist of that which it is a part of, or the parts which make up the device or step. The term "and/or" is inclusive of the items which it joins linguistically and each item by itself. "Substantially" is defined as "at least 95% of the term being described" and any device or aspect of a device or method described herein can be read as "comprising" or "consisting" thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** shows a perspective view of the hand glove illustrating the ulnar side of the glove body according to one embodiment of the present disclosed technology.

FIG. **2** shows an elevation view of the hand glove illustrating the dorsal side of the glove body according to one embodiment of the present disclosed technology.

FIG. **3** shows an elevation view of the hand glove illustrating the palmar side of the glove body according to one embodiment of the present disclosed technology.

FIG. **4** shows a left-side view of the hand glove illustrating the radial side of the glove body according to one embodiment of the present disclosed technology.

FIG. **5** shows a right-side view of the hand glove illustrating the ulnar side of the glove body according to one embodiment of the present disclosed technology.

FIG. **6** shows a top-down view of the hand glove according to one embodiment of the present disclosed technology.

FIG. **7** shows a bottom-up view of the hand glove according to one embodiment of the present disclosed technology.

FIG. **8** shows a view of a pair of hand gloves attached together by a tether according to one embodiment of the present disclosed technology.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE DISCLOSED TECHNOLOGY

The present disclosed technology provides a hand glove that facilitates the donning and doffing off the glove, particularly with children. The hand glove comprises a glove body having a dorsal side, a palmar side, a radial side, an ulnar side, and a hand portion including a palm section, a dorsal section, a plurality of digit sheaths, and an opening for providing access to an interior of the glove. The digit sheaths include at least a first sheath corresponding to the first digit of a wearer's hand and second sheath corresponding to one or more of the other digits of a wearer's hand. The radial side includes a first zipper and a first fastening strap. The ulnar side includes a second zipper and a second fastening strap. The first zipper is parallel with and opposite to the second zipper. The dorsal side includes a fastener spanning the dorsal section. The fastening straps are configured to removably attach to the fastener over the zippers to secure the glove body to a wearer's hand.

Referring to FIGS. **1-7**, simultaneously, FIG. **1** shows a perspective view of the hand glove illustrating the ulnar side of the glove body according to one embodiment of the present disclosed technology. FIG. **2** shows an elevation view of the hand glove illustrating the dorsal side of the glove body according to one embodiment of the present disclosed technology. FIG. **3** shows an elevation view of the hand glove illustrating the palmar side of the glove body according to one embodiment of the present disclosed technology. FIG. **4** shows a left-side view of the hand glove illustrating the radial side of the glove body according to one embodiment of the present disclosed technology. FIG. **5** shows a right-side view of the hand glove illustrating the ulnar side of the glove body according to one embodiment of the present disclosed technology. FIG. **6** shows a top-down view of the hand glove according to one embodiment of the present disclosed technology. FIG. **7** shows a bottom-up view of the hand glove according to one embodiment of the present disclosed technology.

The present disclosed technology provides a hand glove **10** comprising a glove body **12** including a dorsal side **14**, a palmar side **16** opposite the dorsal side **14**, a radial side **18**, an ulnar side **20** opposite the radial side **18**, a hand portion **22** defining an interior cavity **24** configured to receive and cover the hand of a wearer.

The hand portion **22** includes a palm section **22**P on the palmar side **16**, a dorsal section **22**D on the dorsal side **14**, an upper end **22**A including a plurality of digit sheaths **26** protruding outwardly from the upper end **22**A, and a lower end **22**B including a peripheral edge **28** defining an opening **29** for providing access to the interior cavity **24** of the glove body **12**. The palm section **22**P includes a palmar surface **22**PS and the dorsal section **22**D includes a dorsal surface **22**DS. The hand portion **22** extends from the radial side **18** to the ulnar side **20**. The hand portion **22** includes a first depth D**1** at the radial side **18** and a second depth D**2** at the ulnar side **20**. In embodiments, the second depth D**2** is larger than the first depth D**1**.

The plurality of digit sheaths **26** include at least a first sheath **26**A corresponding to the first digit of a wearer's hand and second sheath **26**B corresponding to one or more of the other digits of a wearer's hand. In some embodiments, the plurality of digit sheaths **26** include a first sheath **26**A**1** corresponding to the first digit of a wearer's hand, a second sheath **26**B**2** corresponding to the second digit of a wearer's hand, a third sheath **26**C**3** corresponding to the third digit of a wearer's hand, a fourth sheath **26**D**4** corresponding to the fourth digit of a wearer's hand, and a fifth sheath **26**E**5** corresponding to the fifth digit of a wearer's hand. In embodiments, at least one of the finger sheaths **26** includes a finger grip **27** positioned at a distal end thereof, such that the finger grip **27** corresponds to the distal phalange of a user's finger.

The radial side **18** includes a first zipper **30**A and a first fastening strap **32**A extending outwardly therefrom. The ulnar side **20** includes a second zipper **30**B and a second fastening strap **32**B extending outwardly therefrom. The first zipper **30**A is parallel with and opposite to the second zipper **30**B. The first zipper **30**A and second zipper **30**B are coplanar and define a hypothetical plane that divides the glove body **12** in half along a coronal plane of the glove body **12**, which separates and defines the dorsal section **22**D and the palm section **22**P. The first zipper **30**A extends longitudinally along the radial side **18** of the glove body **12** from the peripheral edge **28** of the hand portion **22** to the first sheath **26**A. The second zipper **30**B extends longitudinally along the ulnar side **20** from the peripheral edge **28** of the hand portion **22** to the second sheath **26**B. The first zipper **30**A opens from the peripheral edge **28** to the first sheath **26**A enlarging the opening **29** on the lower end **22**B of the hand portion **22** at the radial side **18**. The second zipper **30**B opens from the peripheral edge **28** to the second sheath **26**B enlarging the opening **29** on the lower end **22**B of the hand portion **22** at the ulnar side **20**. In embodiments, the first zipper **30**A includes a length smaller than a length of the second zipper **30**B. In some embodiment, the first zipper **30**A includes a length substantially equal to a length of the second zipper **30**B. In some embodiments, the palm section **22**P includes a wrinkled section **22**W extending from the first zipper **30**A to the second zipper **30**B. The wrinkled section **22**W is opposite the fastener **34** and enables scrunching of the palm section **22**P when the first fastening strap **32**A and the second fastening strap **32**B are attached to the fastener **34**.

The dorsal side **14** includes a fastener **34** attached to the dorsal surface **22**DS and spanning the dorsal section **22**D. The fastener **34** may comprise a strip of fastening material extending laterally across the dorsal section **22**D from the first zipper **30**A to the second zipper **30**B. The first fastening strap **32**A and the second fastening strap **32**B are configured to removably attach to the fastener **34** to secure the glove body **12** to a wearer's hand. The first fastening strap **32**A is

disposed on the palm section **22**P of the hand portion **22** midway along a length of the first zipper **30**A. In embodiments, the first fastening strap **32**A is disposed at the first sheath **26**A. In some embodiments, the first fastening strap **32**A is disposed midway between the peripheral edge **28** and the first sheath **26**A. The first fastening strap **32**A is configured to lay over the first zipper **30**A when attached to the fastener **34**, thereby preventing the first zipper **30**B from becoming unzipped. The second fastening strap **32**B is also disposed on the palm section **22**P of the hand portion **22** midway between the peripheral edge **28** and the second sheath **26**B. In embodiments, the second fastening strap **32**B is positioned at midway along a length of the second zipper **30**B. The second fastening strap **32**B is configured to lay over the second zipper **30**B when attached to the fastener **34**, thereby preventing the second zipper **32**B from becoming unzipped. The first fastening strap **32**A and the second fastening strap **32**B may comprise a hook and loop fastening material, while the fastener **34** comprises a corresponding hook and loop fastening material to enable attachment and disengagement of the first and second fastening straps **32**A, **32**B with the fastener **34**. In embodiments, the first fastening strap **32**A, the second fastening **32**B strap, the fastener **34**, and the wrinkled section **22**W are coplanar and aligned. In some embodiments, the first fastening strap **32**A and the second fastening strap **32**B include substantially the same length and width. In other embodiments, the first fastening strap **32**A, the second fastening strap **32**B, and the fastener **34** include substantially the same width.

Referring now to FIG. **8**, FIG. **8** shows a view of a pair of hand gloves attached together by a tether according to one embodiment of the present disclosed technology. In embodiments, the hand glove **10** further comprises a tether **36** attaching the glove body **12** to the glove body **12**B of the matching hand glove pair **10**B. The tether **36** comprises an elongated member including a length at least twice the length of the hand glove **10** and a width less than a width of the fastening straps **32**A, **32**B and the fastener **34**.

Any device or step to a method described in this disclosure can comprise or consist of that which it is a part of, or the parts which make up the device or step. The term "and/or" is inclusive of the items which it joins linguistically and each item by itself.

For purposes of this disclosure, the term "substantially" is defined as "at least 95% of" the term which it modifies.

Any device or aspect of the technology can "comprise" or "consist of" the item it modifies, whether explicitly written as such or otherwise.

When the term "or" is used, it creates a group which has within either term being connected by the conjunction as well as both terms being connected by the conjunction.

While the disclosed technology has been disclosed with specific reference to the above embodiments, a person having ordinary skill in the art will recognize that changes can be made in form and detail without departing from the spirit and the scope of the disclosed technology. The described embodiments are to be considered in all respects only as illustrative and not restrictive. All changes that come within the meaning and range of equivalency of the claims are to be embraced within their scope. Combinations of any of the methods and apparatuses described hereinabove are also contemplated and within the scope of the invention.

What is claimed is:

1. A hand glove, comprising:

a glove body including a dorsal side, a palmar side, the dorsal side opposite the palmar side, a radial side, an ulnar side, the radial side opposite the ulnar side, a hand portion defining an interior cavity configured to receive and cover the hand of a wearer, the hand portion including a palm section on the palmar side, a dorsal section on the dorsal side, an upper end including a plurality of digit sheaths protruding outwardly therefrom, and a lower end including a peripheral edge defining an opening for providing access to the interior cavity of the glove body, the hand portion extending from the radial side to the ulnar side, the plurality of digit sheaths including at least a first sheath corresponding to the first digit of a wearer's hand and second sheath corresponding to one or more of the other digits of a wearer's hand, the radial side including a first zipper and a first fastening strap extending outwardly therefrom, the ulnar side including a second zipper and a second fastening strap extending outwardly therefrom, the first zipper parallel with and opposite to the second zipper, the dorsal side including a fastener spanning the dorsal section, the first fastening strap and the second fastening strap configured to removably attach to the fastener to secure the glove body to a wearer's hand; and

wherein at least one of said digit sheaths comprises a finger grip at a distal end thereof;

wherein said fastener comprises a rectangular area, substantially closer to a distal end of said glove than a proximal end thereof, with at least one longest lateral edge thereof substantially parallel to a lower edge of said dorsal side;

wherein said fastener ends at substantially a midpoint of each of said first and said second zippers;

wherein each of said fastening straps comprises:

a substantially rectangular strap area;

a connected edge thereof, corresponding to a first shorter edge of said rectangular strap area, connected to said glove body; and

a free edge thereof, corresponding to a second shorter end of said rectangular strap area, comprising a semi-circular shape;

wherein an edge of said first strap is connected to said glove body at a point between said first zipper and said first sheath, on a palmar side of said zipper and on a dorsal side of said first sheath;

wherein an edge of said second strap is connected to said glove body at a point between said second zipper and a wrinkled section, on a palmer side of said second zipper and on a dorsal side of said wrinkled section;

wherein a lateral length of each of said fastening straps comprises substantially half of a lateral length of said fastener;

wherein each of said first and second zippers extends vertically from a distal end of said glove body to a location close to, and vertically beneath, a most-proximal area of connection between said first sheath and said glove body.

2. The hand glove of claim **1**, wherein the first zipper and second zipper are coplanar defining a hypothetical plane that divides the glove body in half along a coronal plane of the glove body, thereby separating and defining the dorsal section and the palm section.

3. The hand glove of claim **1**, wherein the first zipper extends longitudinally along the radial side from the peripheral edge of the hand portion to the first sheath and the second zipper extends longitudinally along the ulnar side from the peripheral edge of the hand portion to the second sheath.

4. The hand glove of claim 3, wherein the first zipper includes a length smaller than a length of the second zipper.

5. The hand glove of claim 3, wherein the first zipper includes a length substantially equal to a length of the second zipper.

6. The hand glove of claim 5, wherein the first fastening strap is disposed on the palm section of the hand portion midway along a length of the first zipper, the first fastening strap configured to lay over the first zipper when attached to the fastener, thereby preventing the first zipper from becoming unzipped.

7. The hand glove of claim 6, wherein the second fastening strap is disposed on the palm section of the hand portion midway along a length of the second zipper, the second fastening strap configured to lay over the second zipper when attached to the fastener, thereby preventing the second zipper from becoming unzipped.

8. The hand glove of claim 7, wherein the fastener comprises a strip of fastening material extending laterally across the dorsal section from the first zipper to the second zipper.

9. The hand glove of claim 8, wherein the first zipper opens from the peripheral edge to the first sheath enlarging the opening on the lower end of the hand portion at the radial side.

10. The hand glove of claim 9, wherein the second zipper opens from the peripheral edge to the second sheath enlarging the opening on the lower end of the hand portion at the ulnar side.

11. The hand glove of claim 10, wherein the hand portion includes a first depth at the radial side and a second depth at the ulnar side, the second depth larger than the first depth.

12. The hand glove of claim 11, wherein the palm section includes said wrinkled section extending from the first zipper to the second zipper, the wrinkled section opposite the fastener enabling scrunching of the palm section when the first fastening strap and the second fastening strap are attached to the fastener;

wherein an area of said fastener and an area of said wrinkled section are substantially equal;

wherein a location of said fastener on said dorsal side substantially corresponds to a location of said wrinkled section on said palmer side and extends between said first sheath and said second zipper;

wherein said first sheath is between an edge of said wrinkled section and said first zipper.

13. The hand glove of claim 12, wherein the first fastening strap, the second fastening strap, the fastener, and the wrinkled section are coplanar and aligned.

14. The hand glove of claim 13, wherein the first fastening strap and the second fastening strap comprise a hook and loop fastening material and the fastener comprises a corresponding hook and loop fastening material to enable attachment and disengagement.

15. The hand glove of claim 14, wherein the first fastening strap and the second fastening strap include substantially the same length and width.

16. The hand glove of claim 15, wherein the first fastening strap, the second fastening strap, and the fastener include substantially the same width;

wherein said hand glove further comprises a fastening line connected at a first end thereof to a distal end of said dorsal side of said glove body;

wherein said fastening line is connected at a second end thereof to a second glove body, said second hand glove comprising a substantial mirror-image of said hand glove.

17. The hand glove of claim 15, wherein:

the first zipper and second zipper are coplanar defining a hypothetical plane that divides the glove body in half along a coronal plane of the glove body, thereby separating and defining the dorsal section and the palm section; and

wherein the first zipper extends longitudinally along the radial side from the peripheral edge of the hand portion to the first sheath and the second zipper extends longitudinally along the ulnar side from the peripheral edge of the hand portion to the second sheath.

18. The hand glove of claim 17, wherein the first zipper includes a length smaller than a length of the second zipper.

19. The hand glove of claim 17, wherein the first zipper includes a length substantially equal to a length of the second zipper;

wherein said hand glove further comprises a fastening line connected at a first end thereof to a distal end of said dorsal side of said glove body;

wherein said fastening line is connected at a second end thereof to a second glove body, said second hand glove comprising a substantial mirror-image of said hand glove.

20. A hand glove, comprising: a glove body including a dorsal side, a palmar side, the dorsal side opposite the palmar side, a radial side, an ulnar side, the radial side opposite the ulnar side, a hand portion defining an interior cavity configured to receive and cover the hand of a wearer, the hand portion including a palm section on the palmar side, a dorsal section on the dorsal side, an upper end including a plurality of digit sheaths protruding outwardly therefrom, and a lower end including a peripheral edge defining an opening for providing access to the interior cavity of the glove body, the hand portion extending from the radial side to the ulnar side, the plurality of digit sheaths including at least a first sheath corresponding to the first digit of a wearer's hand and second sheath corresponding to one or more of the other digits of a wearer's hand, the radial side including a first zipper, the ulnar side including a second zipper, the first zipper parallel with and opposite to the second zipper; a fastening section, comprising: at least one fastener, parallel to an edge of said interior cavity of said glove body, on said dorsal side of said glove body and closer to a distal end of said glove body than a proximal end thereof; and at least two fastening straps extending from opposite sides of said glove body; wherein a first fastening strap of said at least two fastening straps comprises a straight end adjacent to a portion of a palmar edge of said first zipper and a curved end extending outwardly from said glove body; wherein a second fastening strap of said at least two fastening straps comprises a straight end adjacent to a portion of a palmar edge of said second zipper and a curved end extending outwardly from said glove body; wherein said at least one fastener comprises a first straight end adjacent to a portion of a dorsal edge of said first zipper at a location thereof corresponding to said first fastening strap, and a second straight end adjacent to a portion of a dorsal edge of said second zipper at a location thereof corresponding to said second fastening strap; wherein a connection between said straight end of said second fastening strap and said glove body is to a portion of a palmar edge of said second zipper; wherein each of said first and second zippers extends vertically from a distal end of said glove body to a location close to, and vertically beneath, a most-proximal area of connection between said first sheath and said glove body; wherein at least one of said plurality of digit sheaths

comprises a distinct finger grip at an end thereof corresponding to a distal phalange of a digit of a wearer's hand.

* * * * *