US007866296B2

(12) **United States Patent**
Schapiro

(10) **Patent No.: US 7,866,296 B2**
(45) **Date of Patent: Jan. 11, 2011**

(54) **ROTARY PISTON MACHINE WITH AN OVAL ROTARY PISTON**

(75) Inventor: **Boris Schapiro**, Berlin (DE)

(73) Assignee: **RKM-Rotationskolbenmaschinen GBR**, Berlin (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 205 days.

(21) Appl. No.: **11/544,461**

(22) Filed: **Oct. 6, 2006**

(65) **Prior Publication Data**

US 2007/0089701 A1 Apr. 26, 2007

Related U.S. Application Data

(63) Continuation-in-part of application No. 11/212,496, filed on Aug. 26, 2005, now Pat. No. 7,117,840, which is a continuation of application No. PCT/EP2004/001921, filed on Feb. 26, 2004.

(30) **Foreign Application Priority Data**

Feb. 27, 2003 (DE) 103 08 831

(51) **Int. Cl.**
F02B 53/00 (2006.01)

(52) **U.S. Cl.** **123/204**; 123/209

(58) **Field of Classification Search** ..... None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,117,563	A	1/1964	Wiegert	
3,760,777	A	9/1973	Leroy	
4,218,992	A *	8/1980	Latsch et al.	123/263
4,332,224	A *	6/1982	Latsch et al.	123/254
4,442,807	A *	4/1984	Latsch et al.	123/263
4,513,708	A *	4/1985	Latsch et al.	123/263
5,024,193	A *	6/1991	Graze, Jr.	123/259
5,105,780	A *	4/1992	Richardson	123/263
5,392,744	A *	2/1995	Regueiro	123/262
5,522,357	A *	6/1996	Nogi et al.	123/261
6,073,605	A *	6/2000	Matsuoka et al.	123/292
6,539,913	B1 *	4/2003	Gardiner	123/231

FOREIGN PATENT DOCUMENTS

DE	28 53 930	A	12/1978
FR	1 327 607	A	12/1963
JP	53 028810	A	3/1978
LU	45663	A	3/1964

* cited by examiner

Primary Examiner—Thomas Denion
Assistant Examiner—Douglas J. Duff
(74) *Attorney, Agent, or Firm*—Lawrence G. Fridman

(57) **ABSTRACT**

An internal combustion engine having at least one working chamber limited by a piston and means for fuel injection, wherein said fuel injection means are arranged in a separate ignition chamber communicating with said working chamber, and means for tuning said ignition chamber and fuel injected by said fuel injection means such that substantially only burnt, expanding combustion gas enters the working chamber.

9 Claims, 10 Drawing Sheets

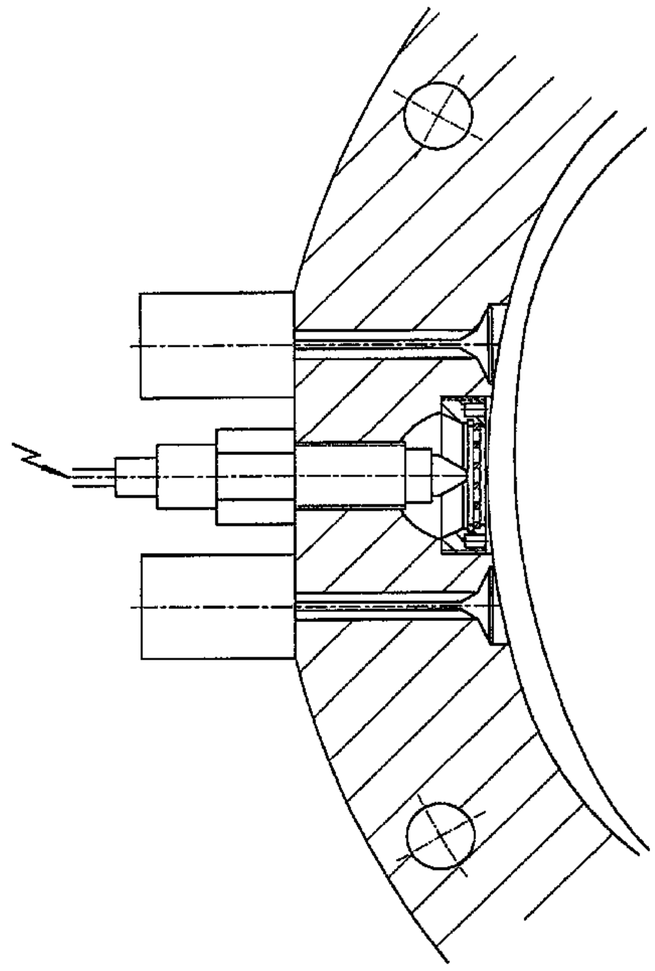

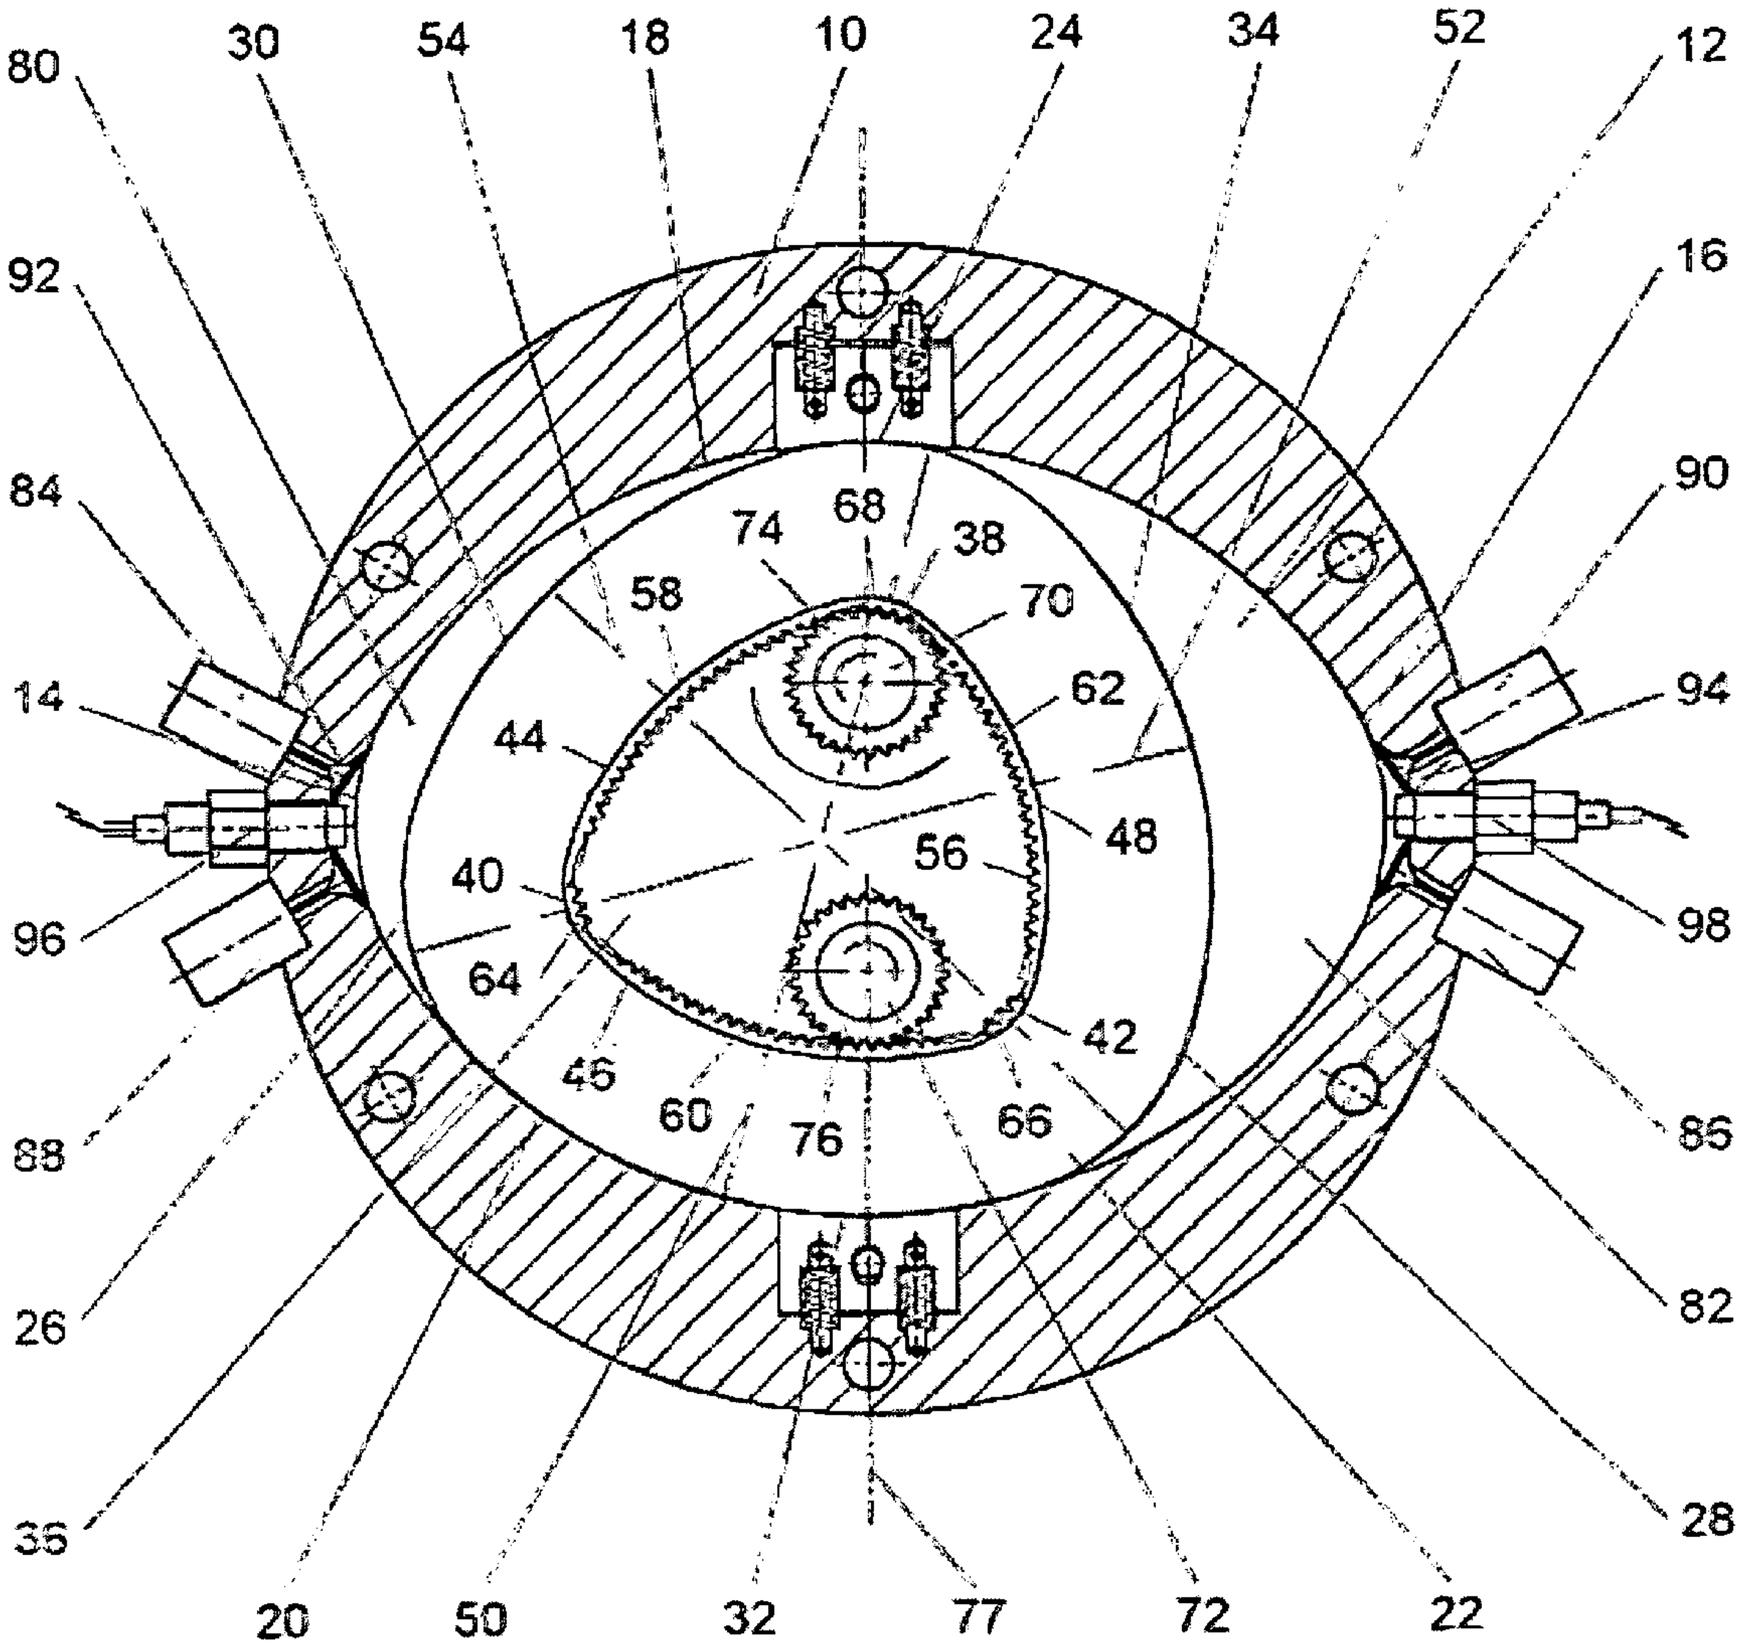
80
30
54
18
10
24
34
52
12
16
92
84
90
14
94
96
98
88
86
26
82
35
28
20
50
32
77
72
22
68
74
38
58
70
62
44
48
56
40
64
42
46
60
76
66

Fig. 1

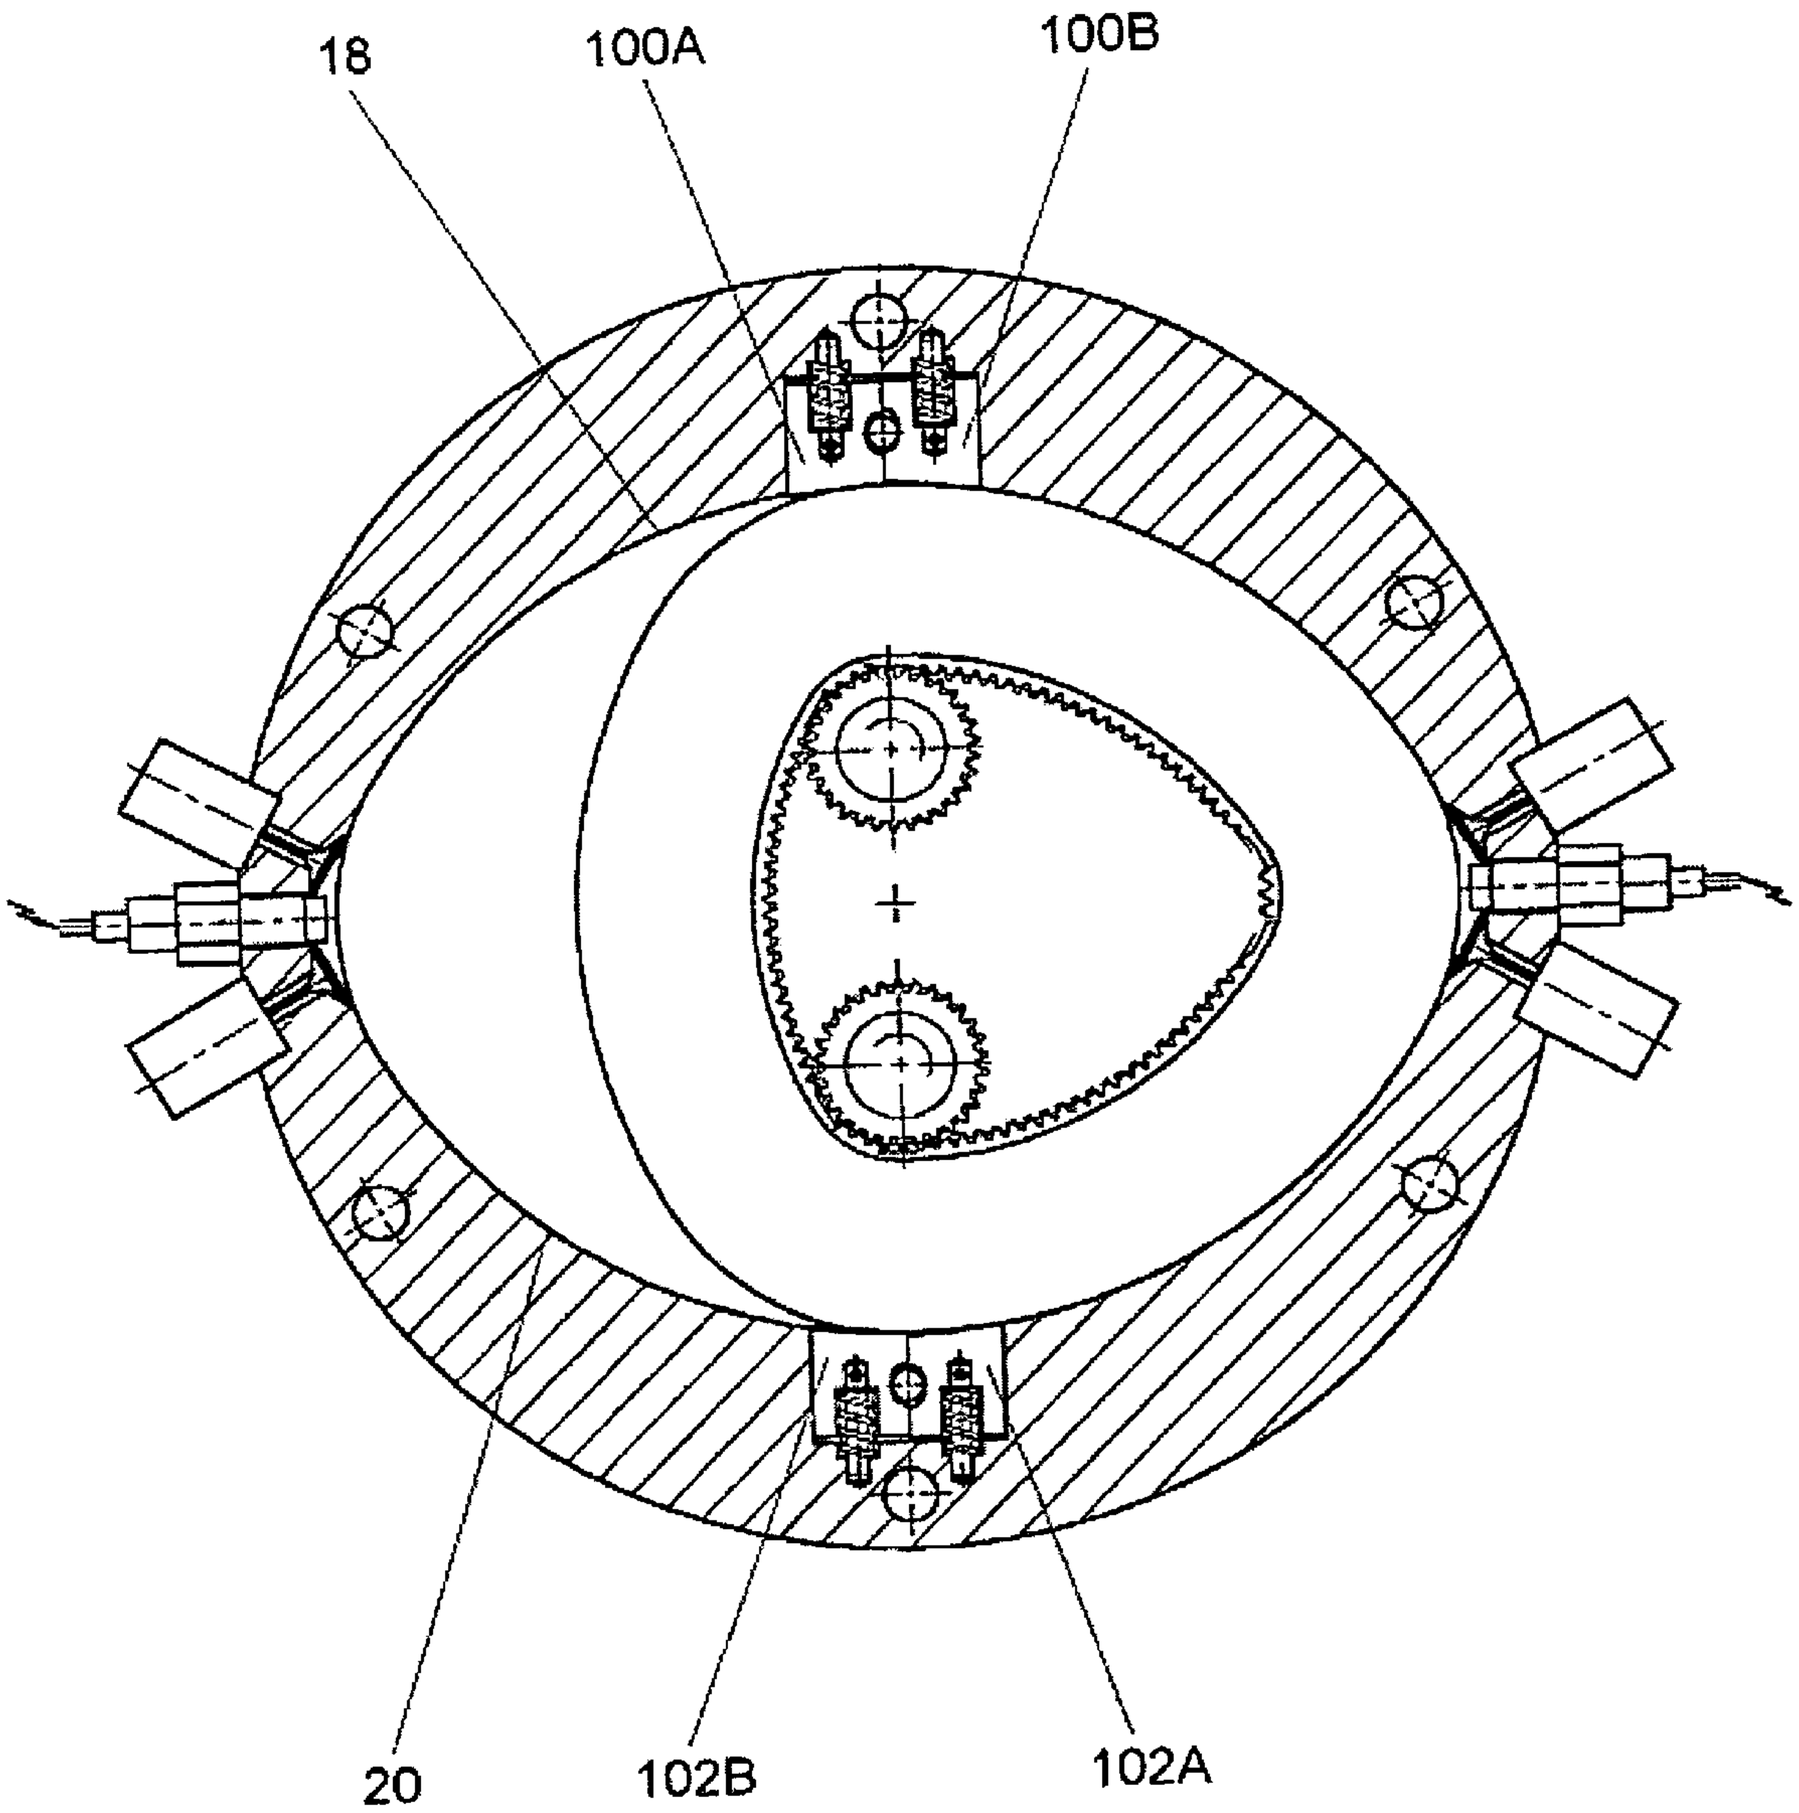

Fig. 2

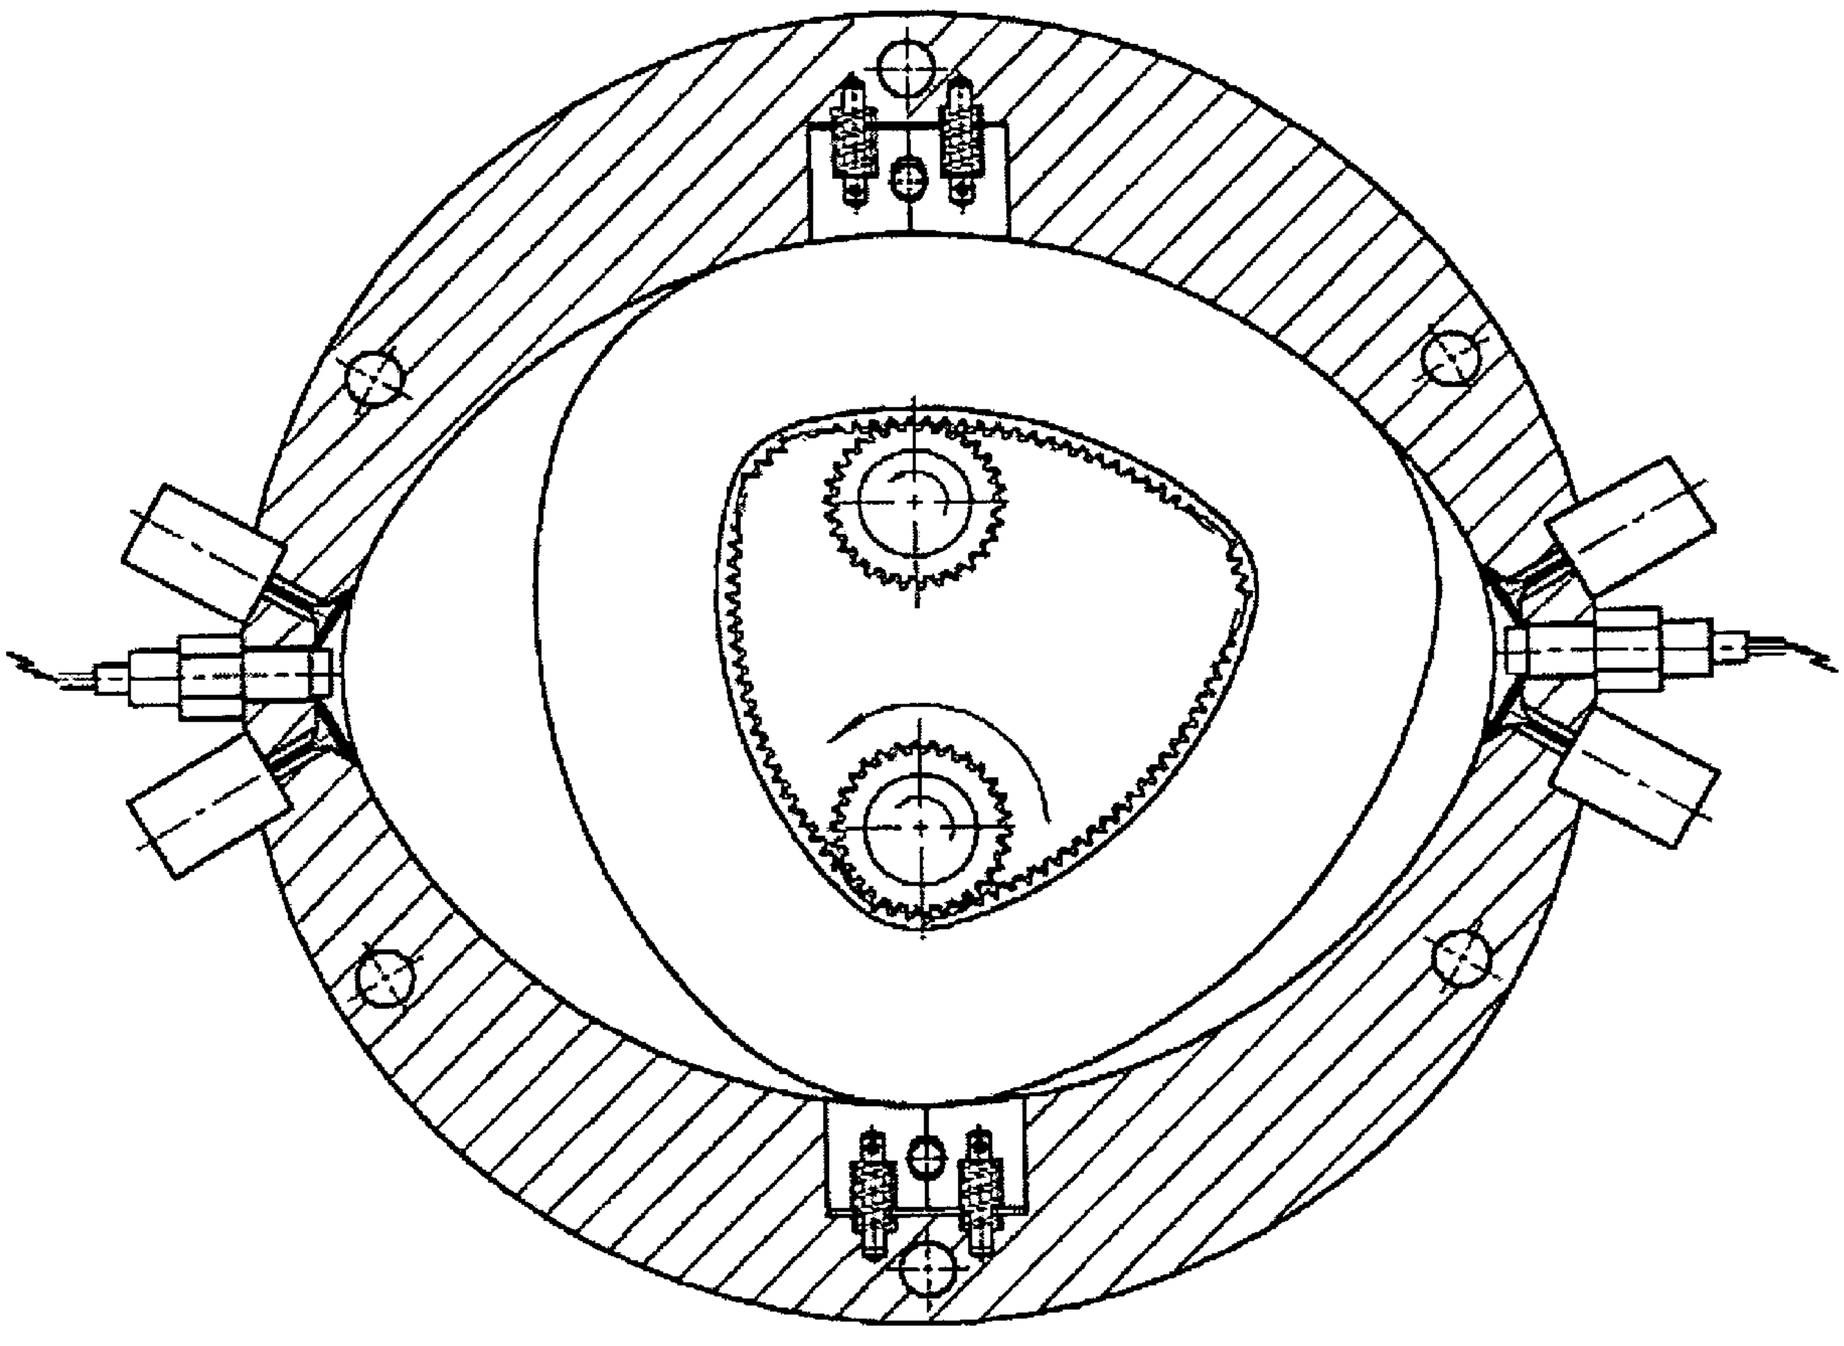

Fig. 3

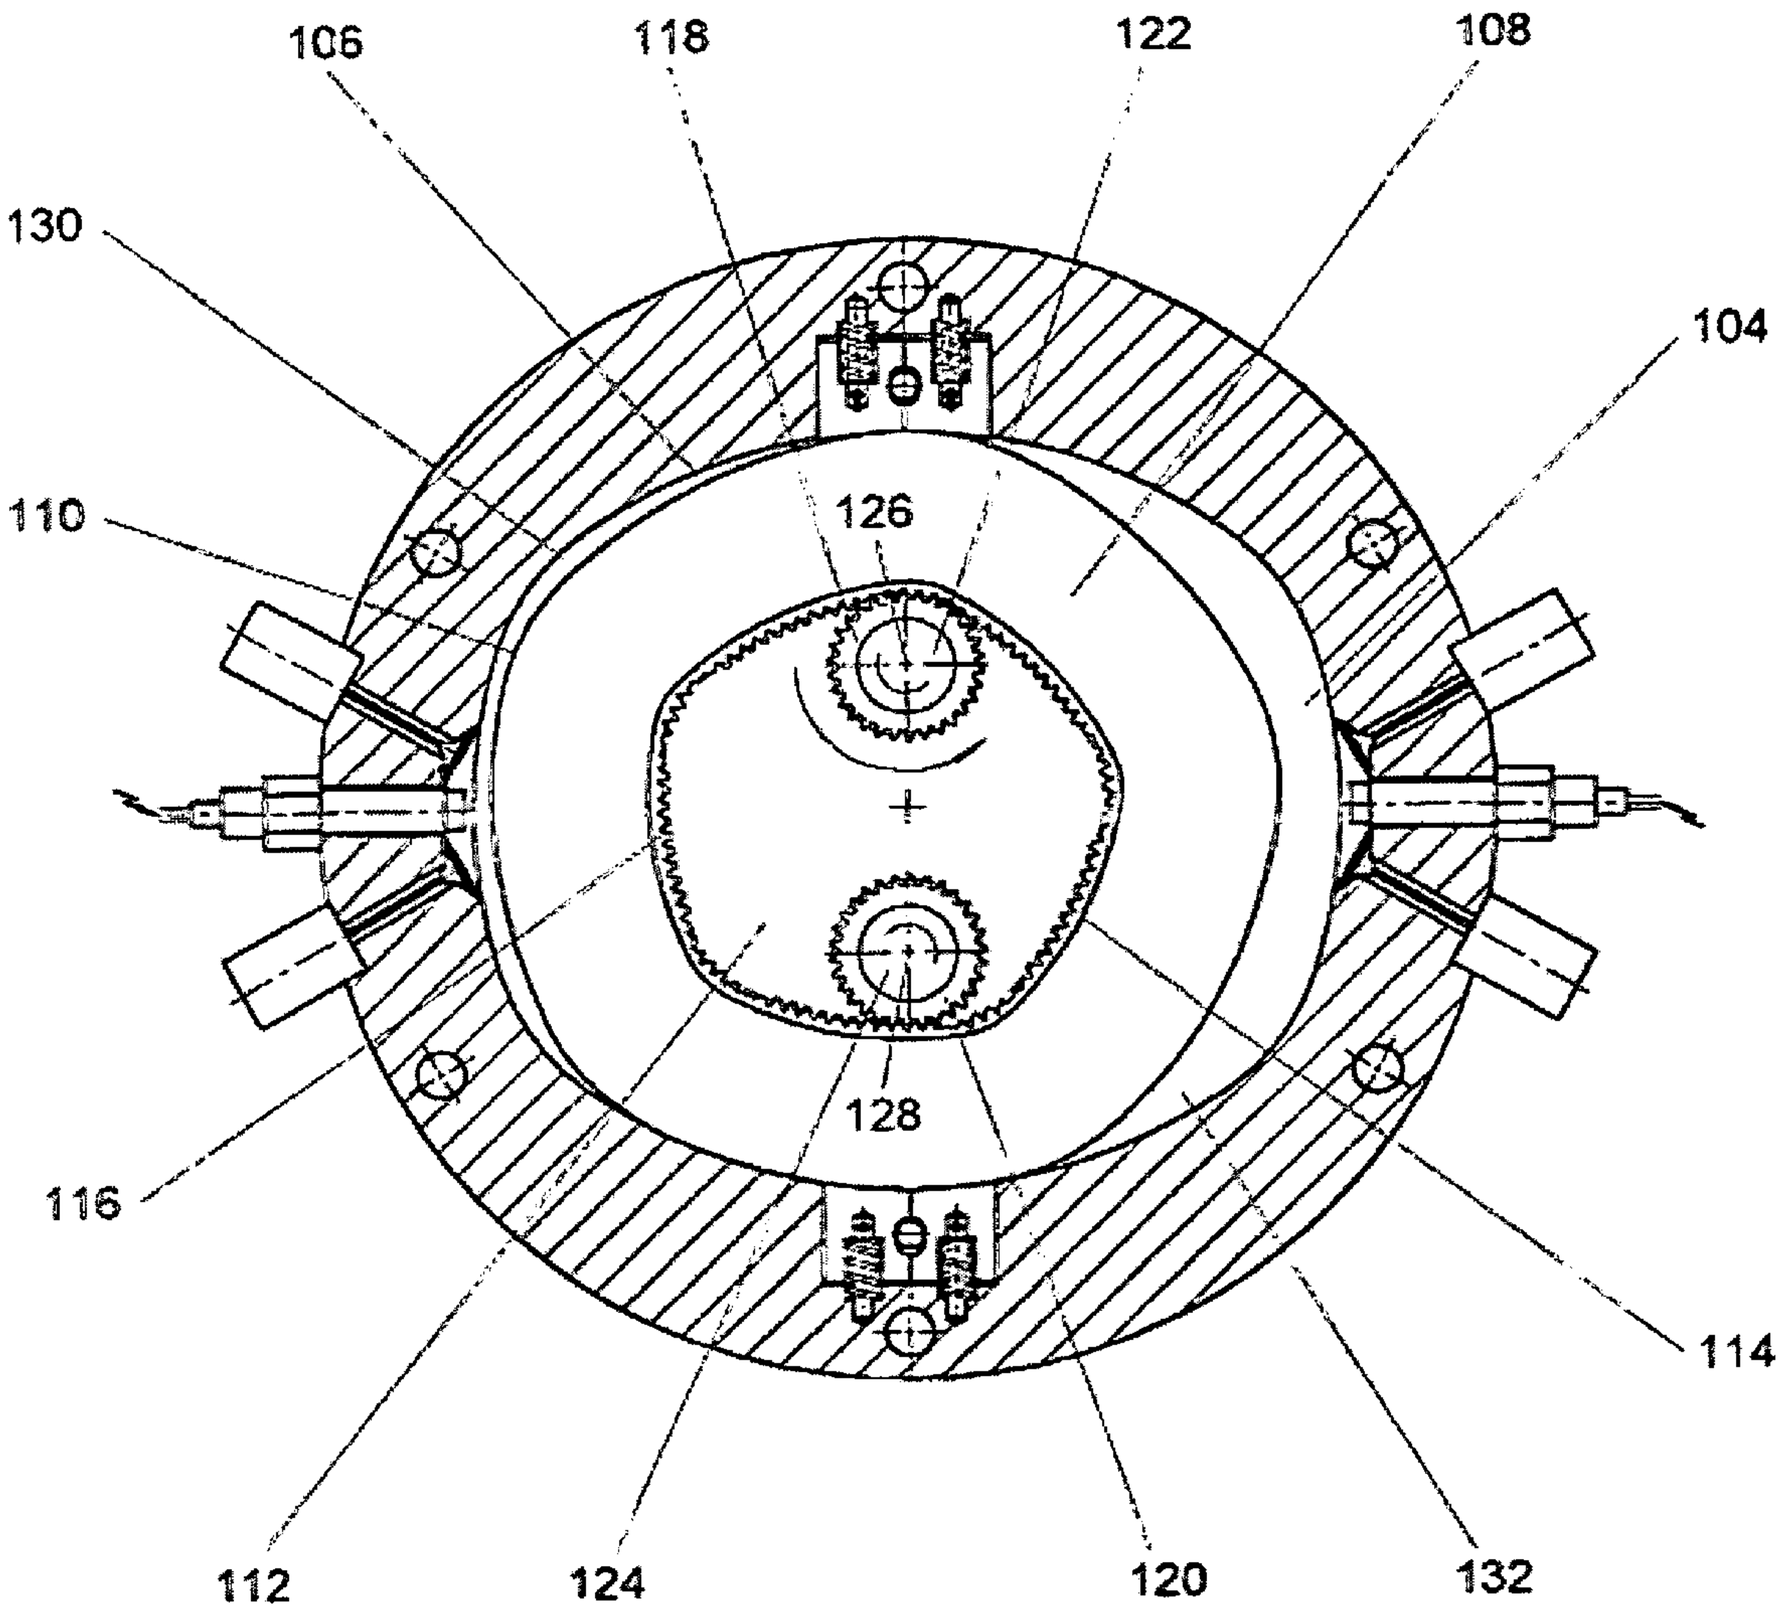

Fig. 4

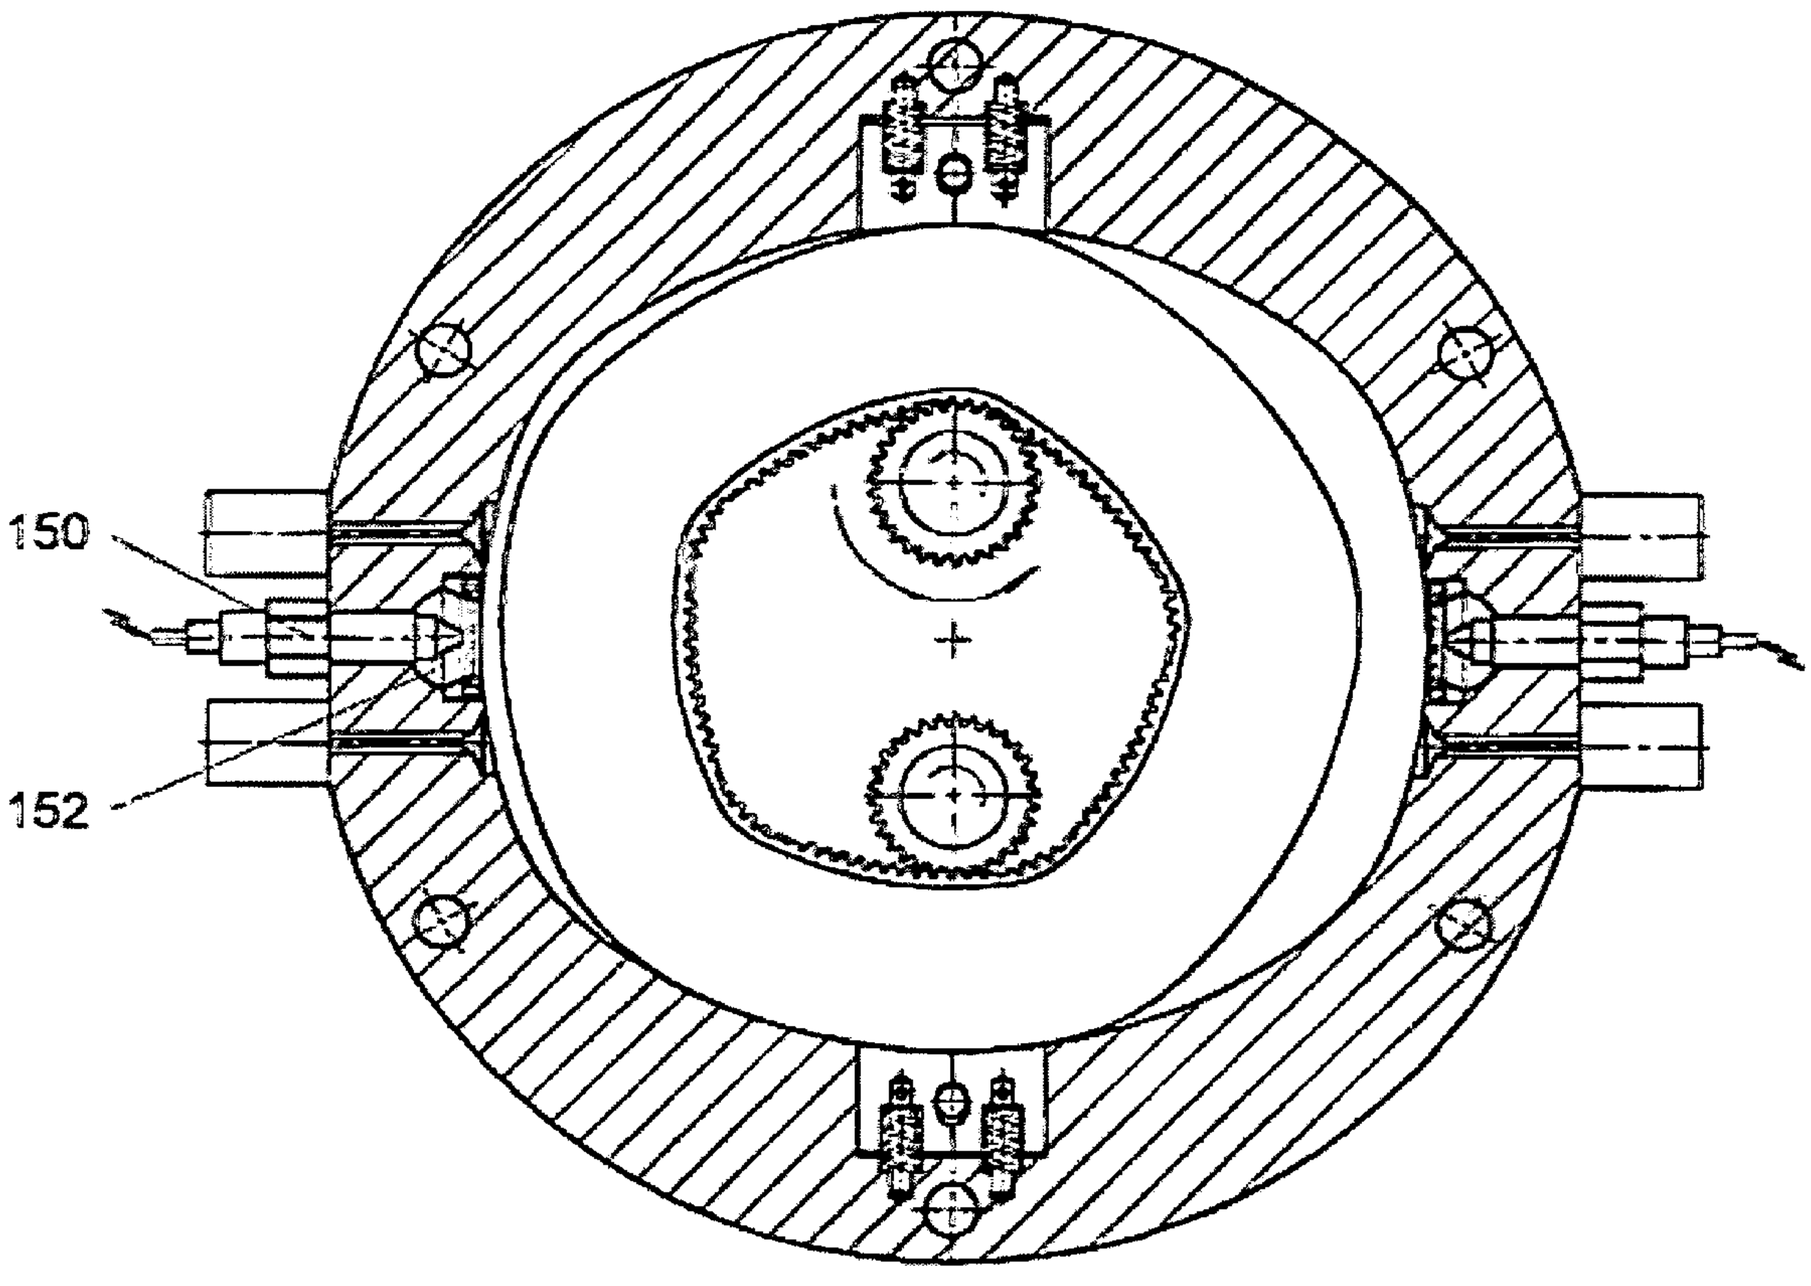

Fig. 4A

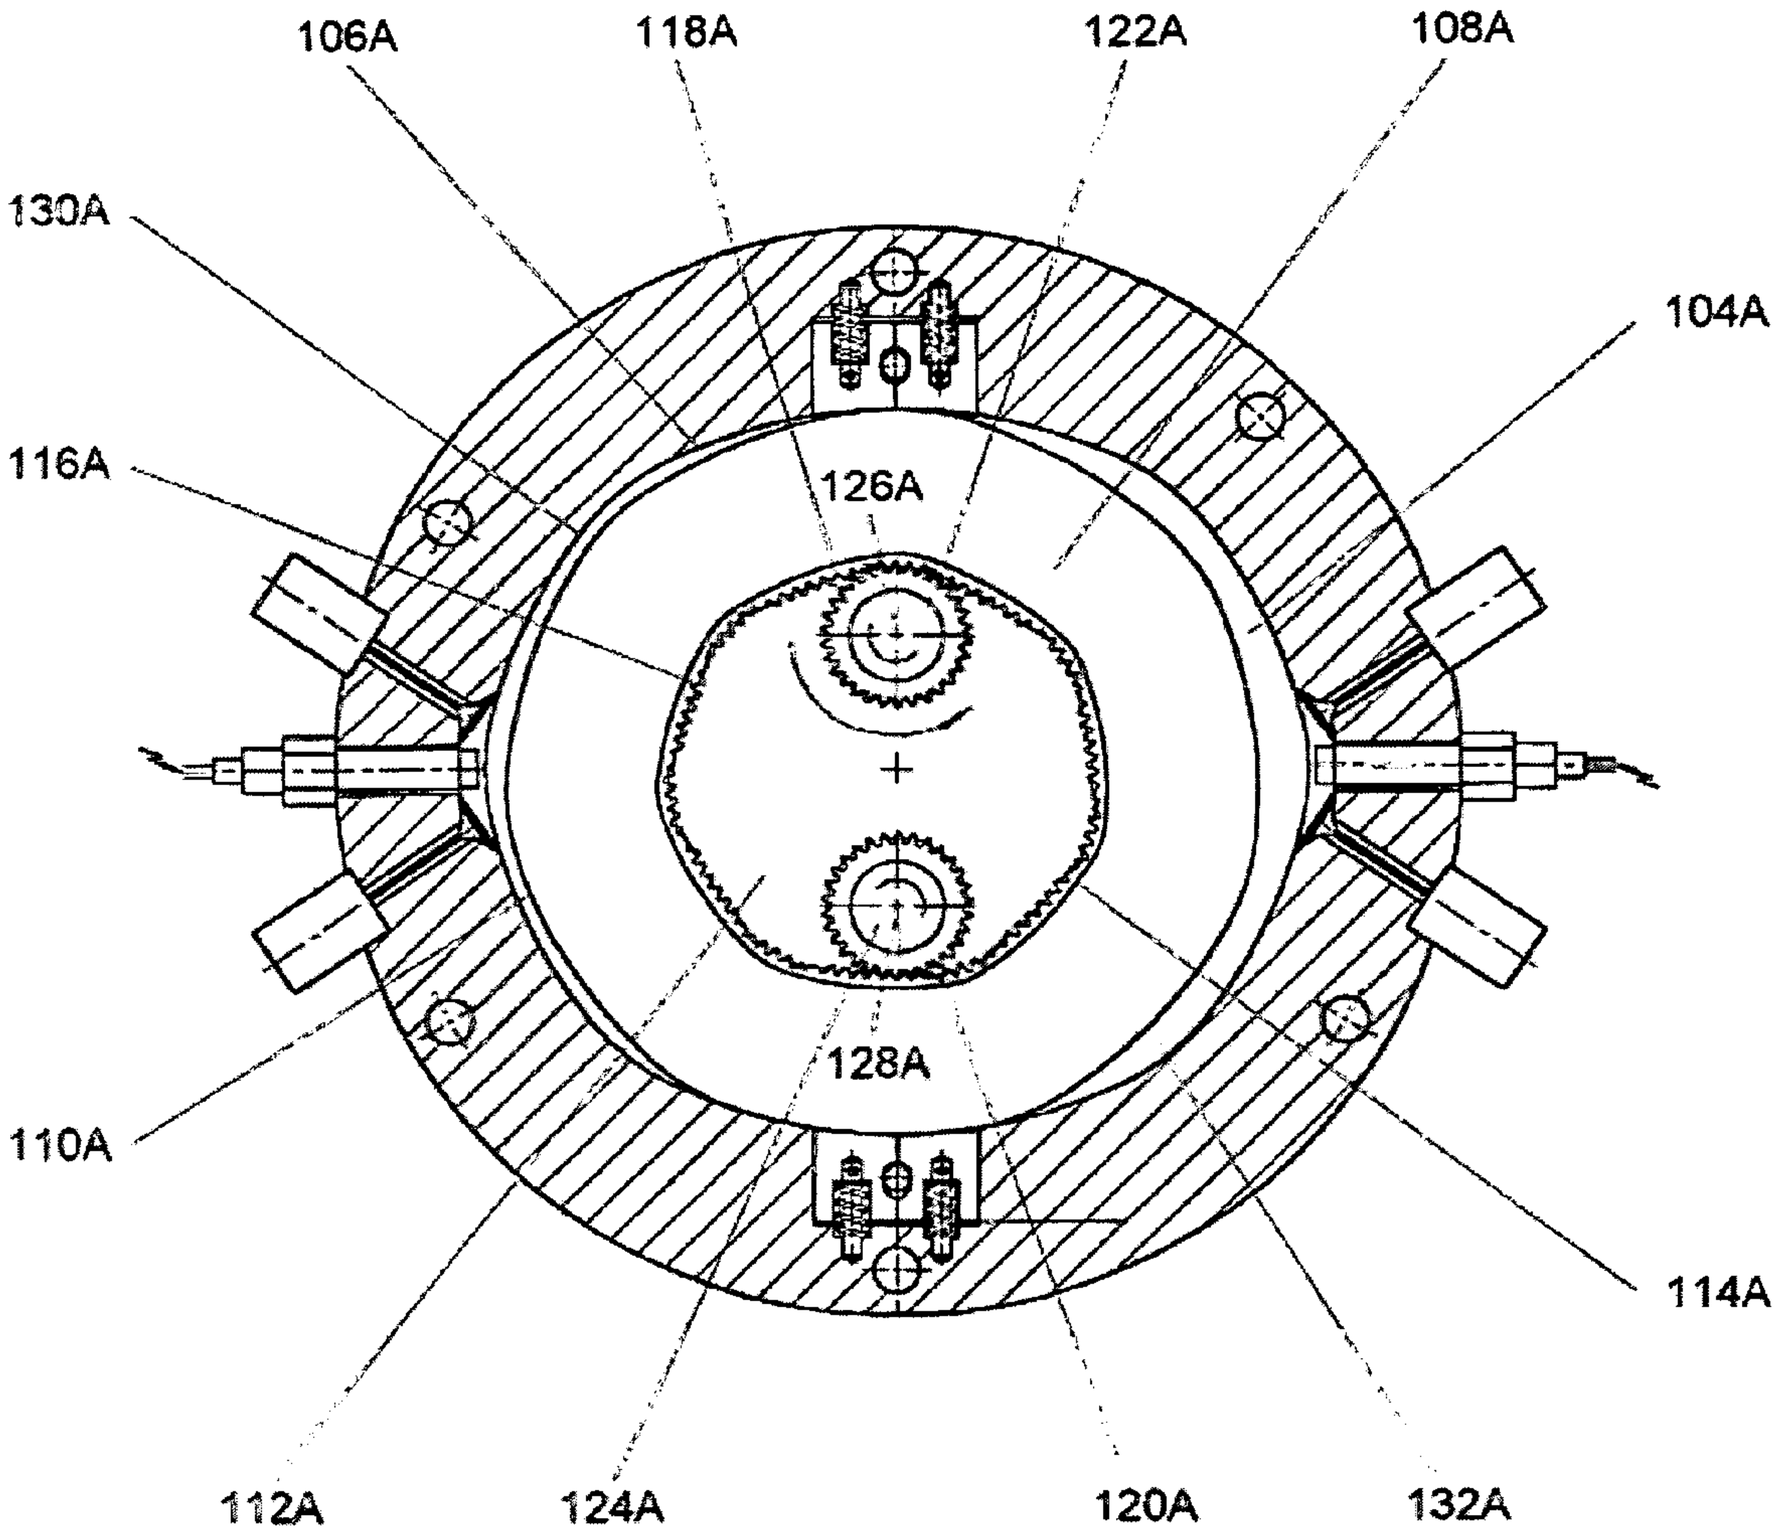
106A
118A
122A
108A
130A
104A
116A
126A
128A
110A
114A
112A
124A
120A
132A

Fig. 5

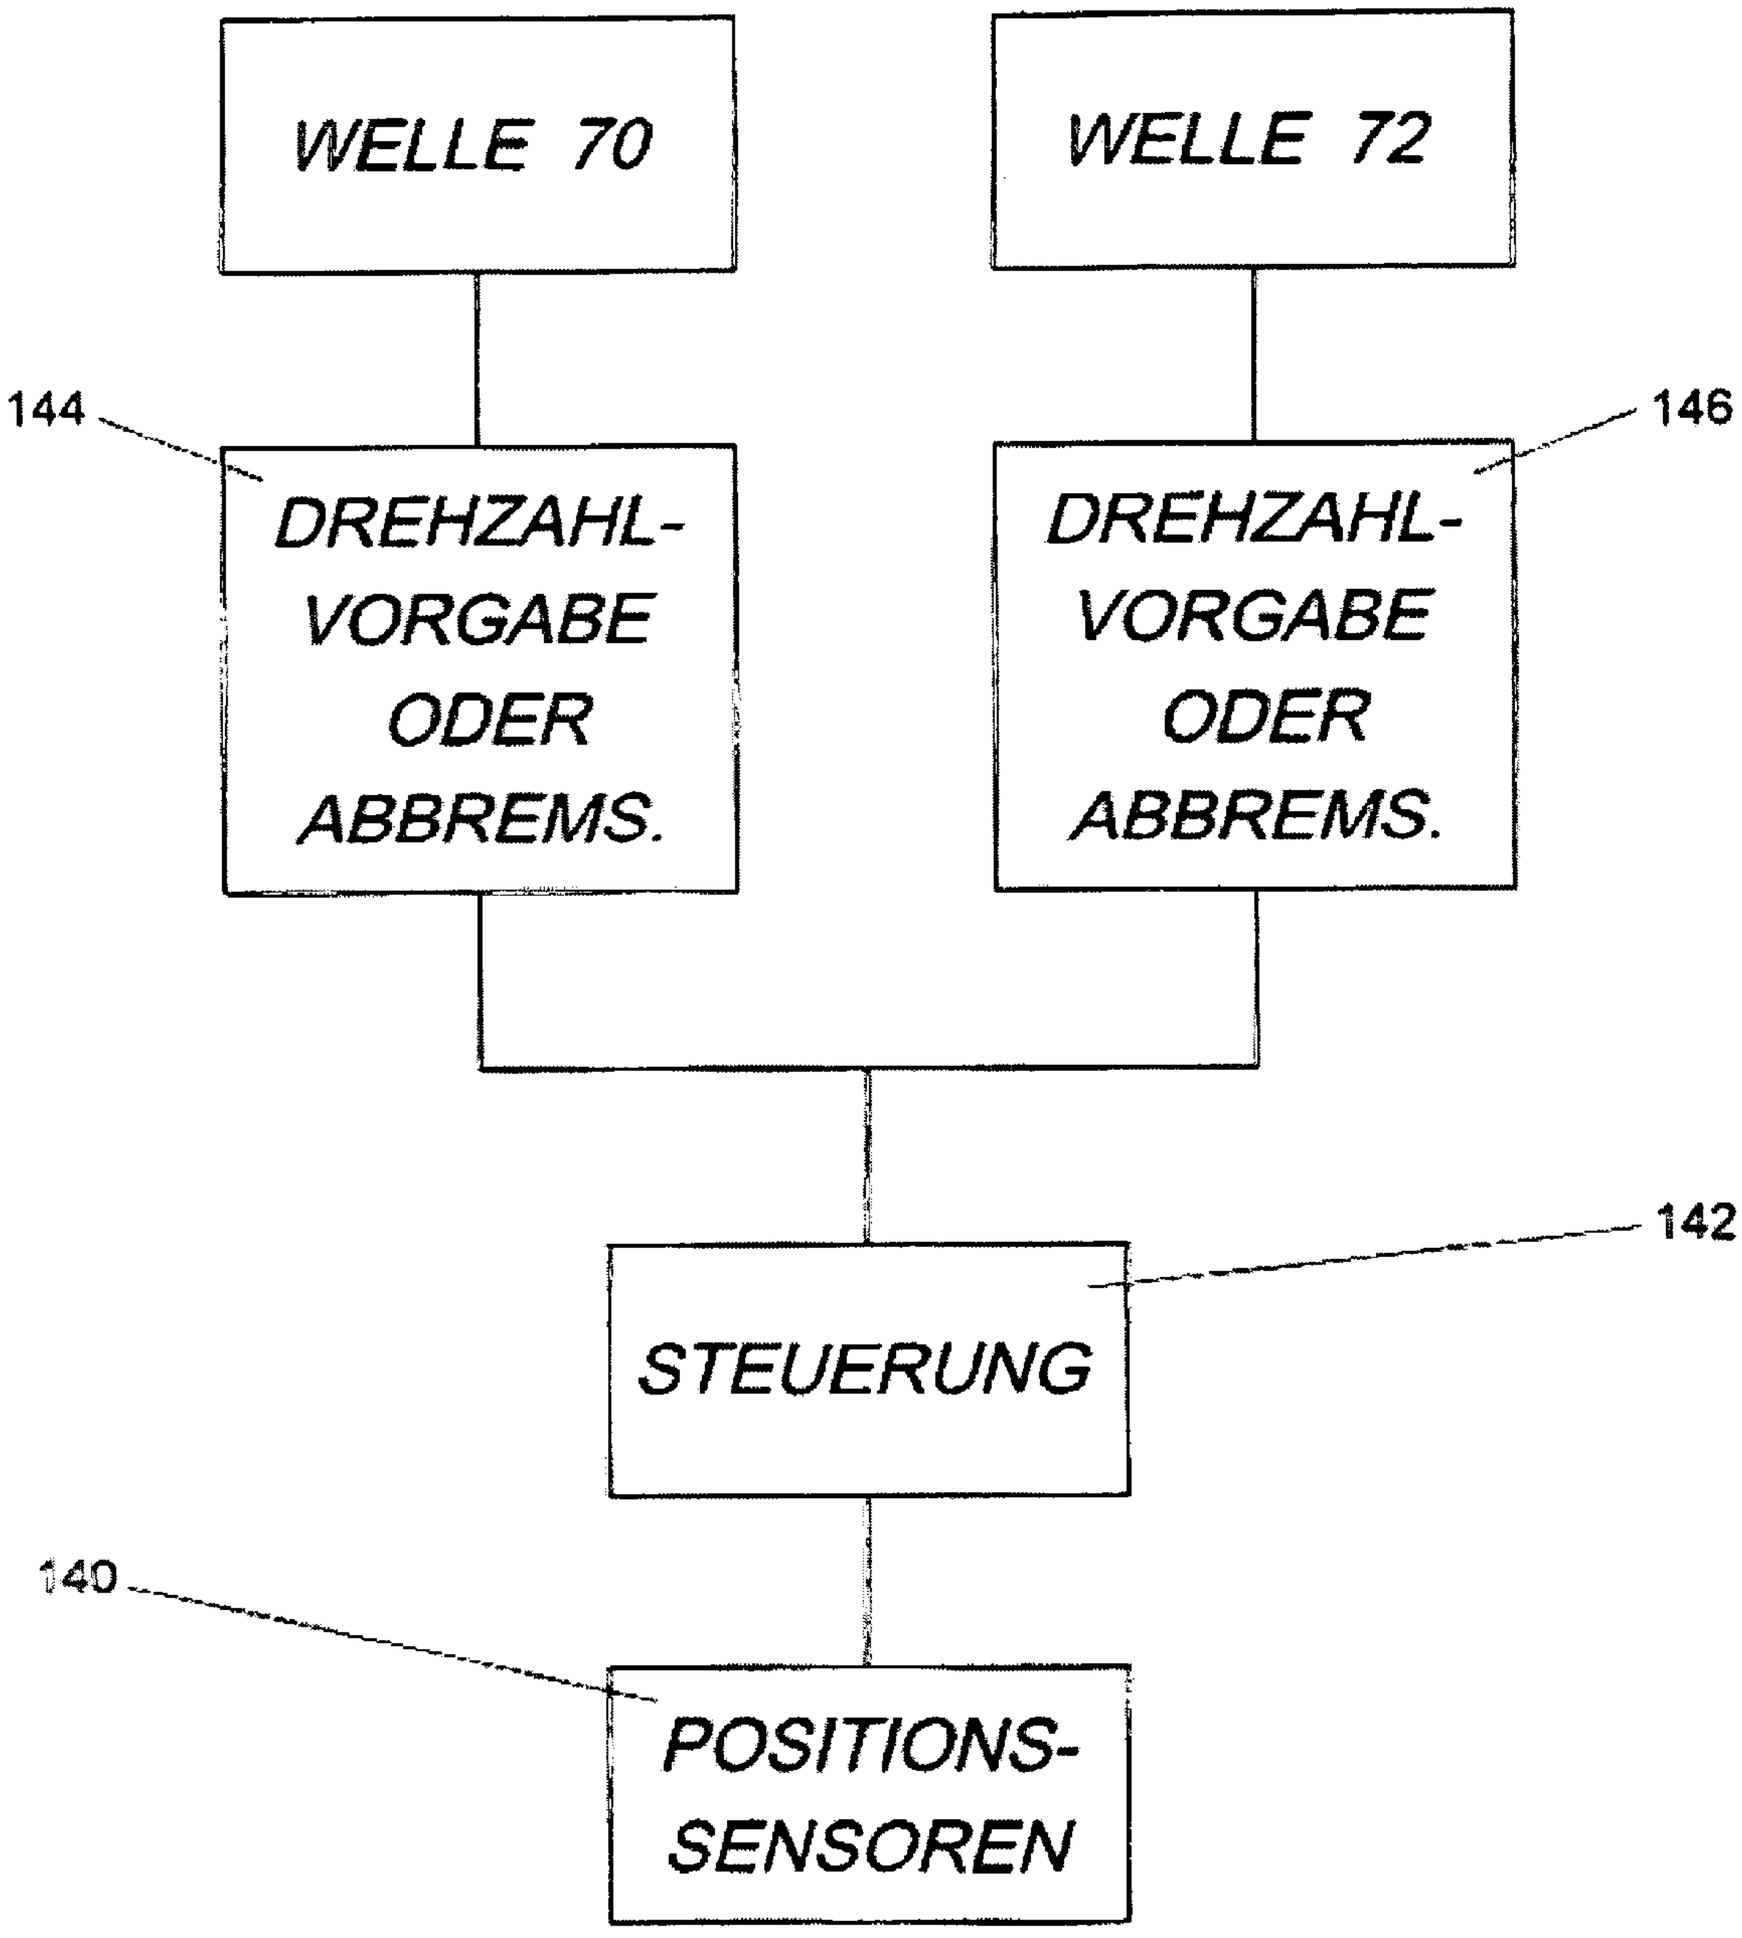
WELLE 70
WELLE 72
144
146
DREHZAHL-VORGABE ODER ABBREMS.
DREHZAHL-VORGABE ODER ABBREMS.
142
STEUERUNG
140
POSITIONS-SENSOREN

Fig. 6

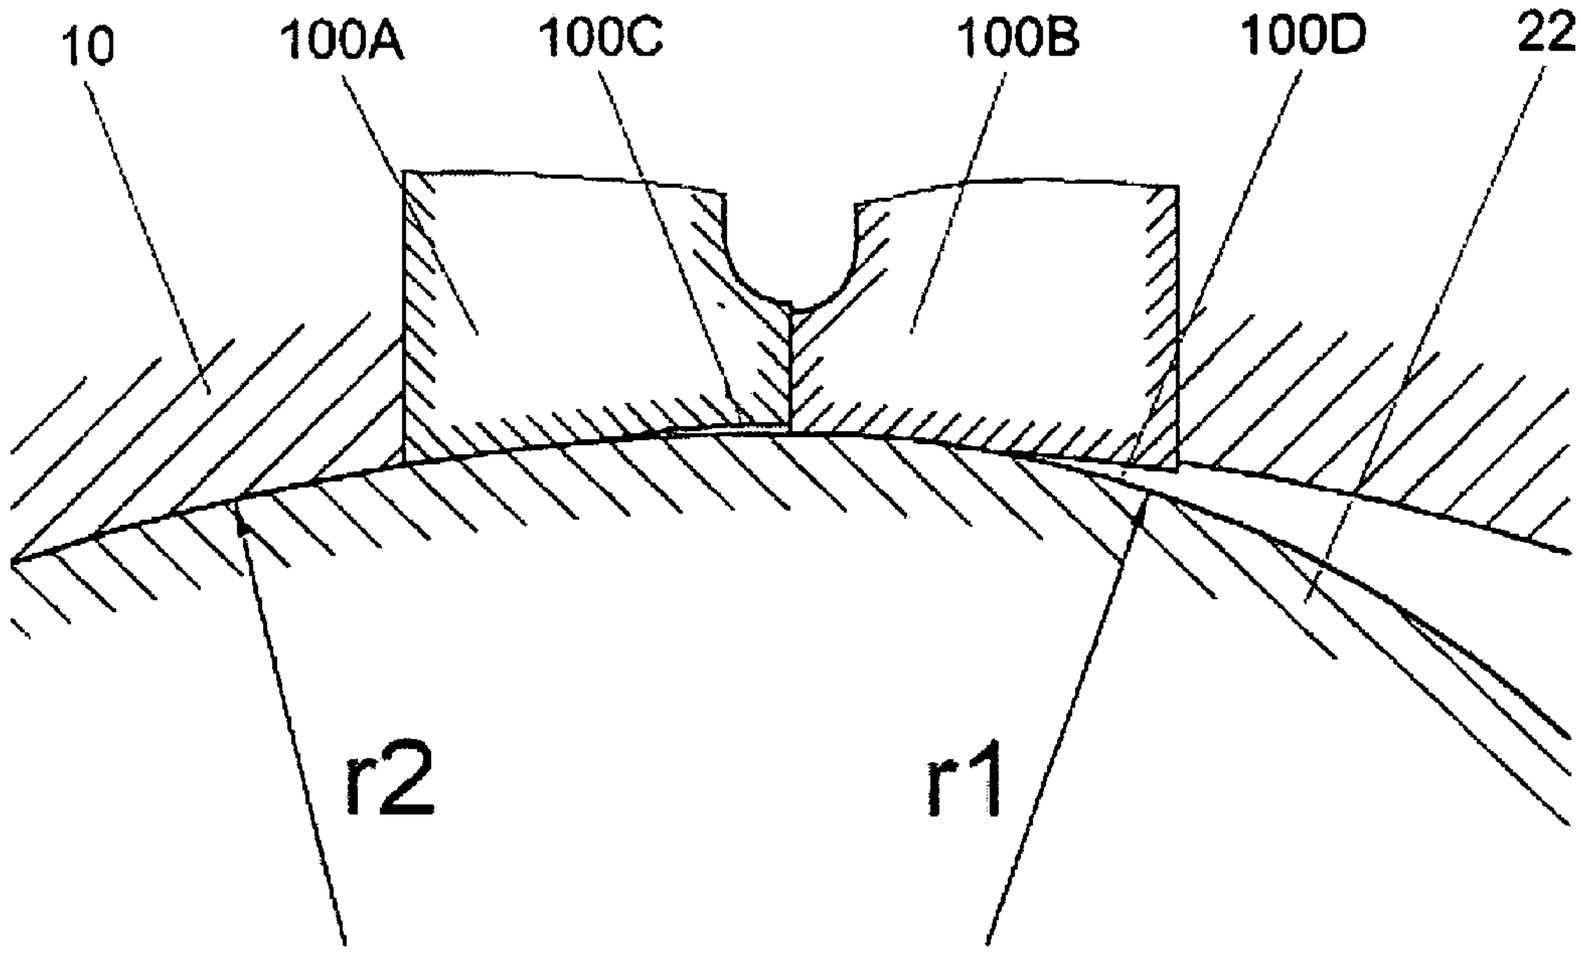

Fig. 7A

Fig. 7B

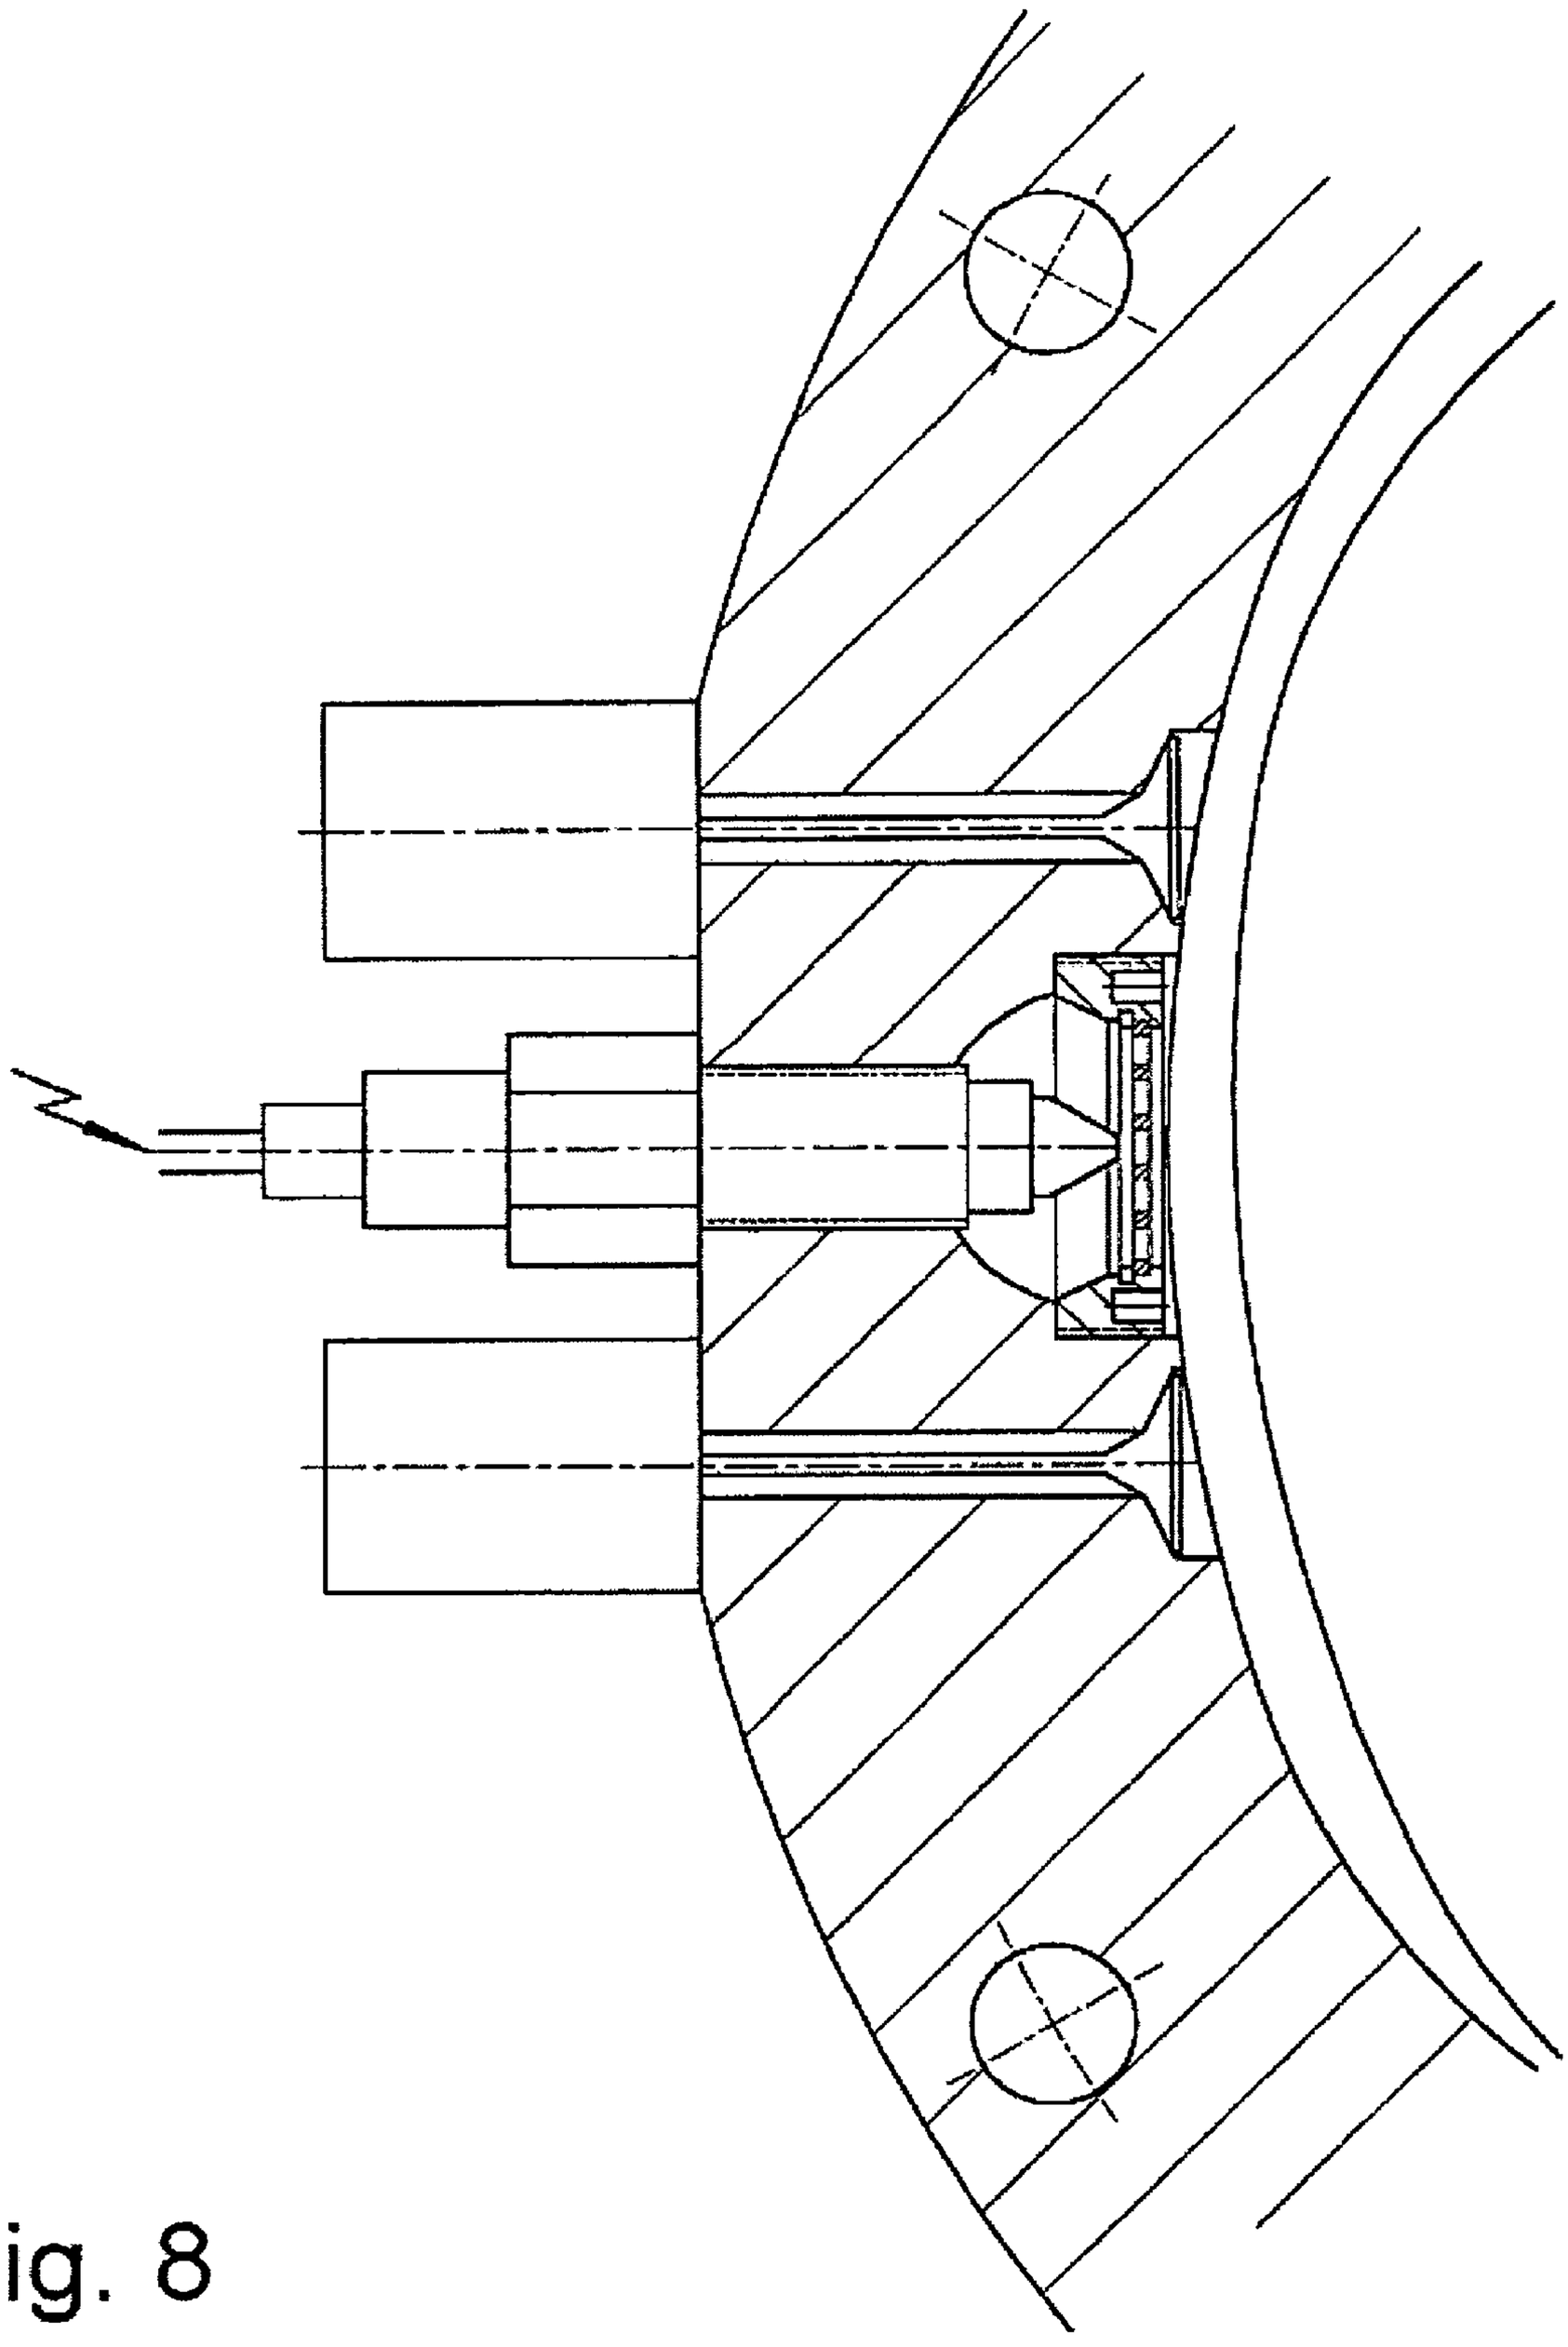

Fig. 8

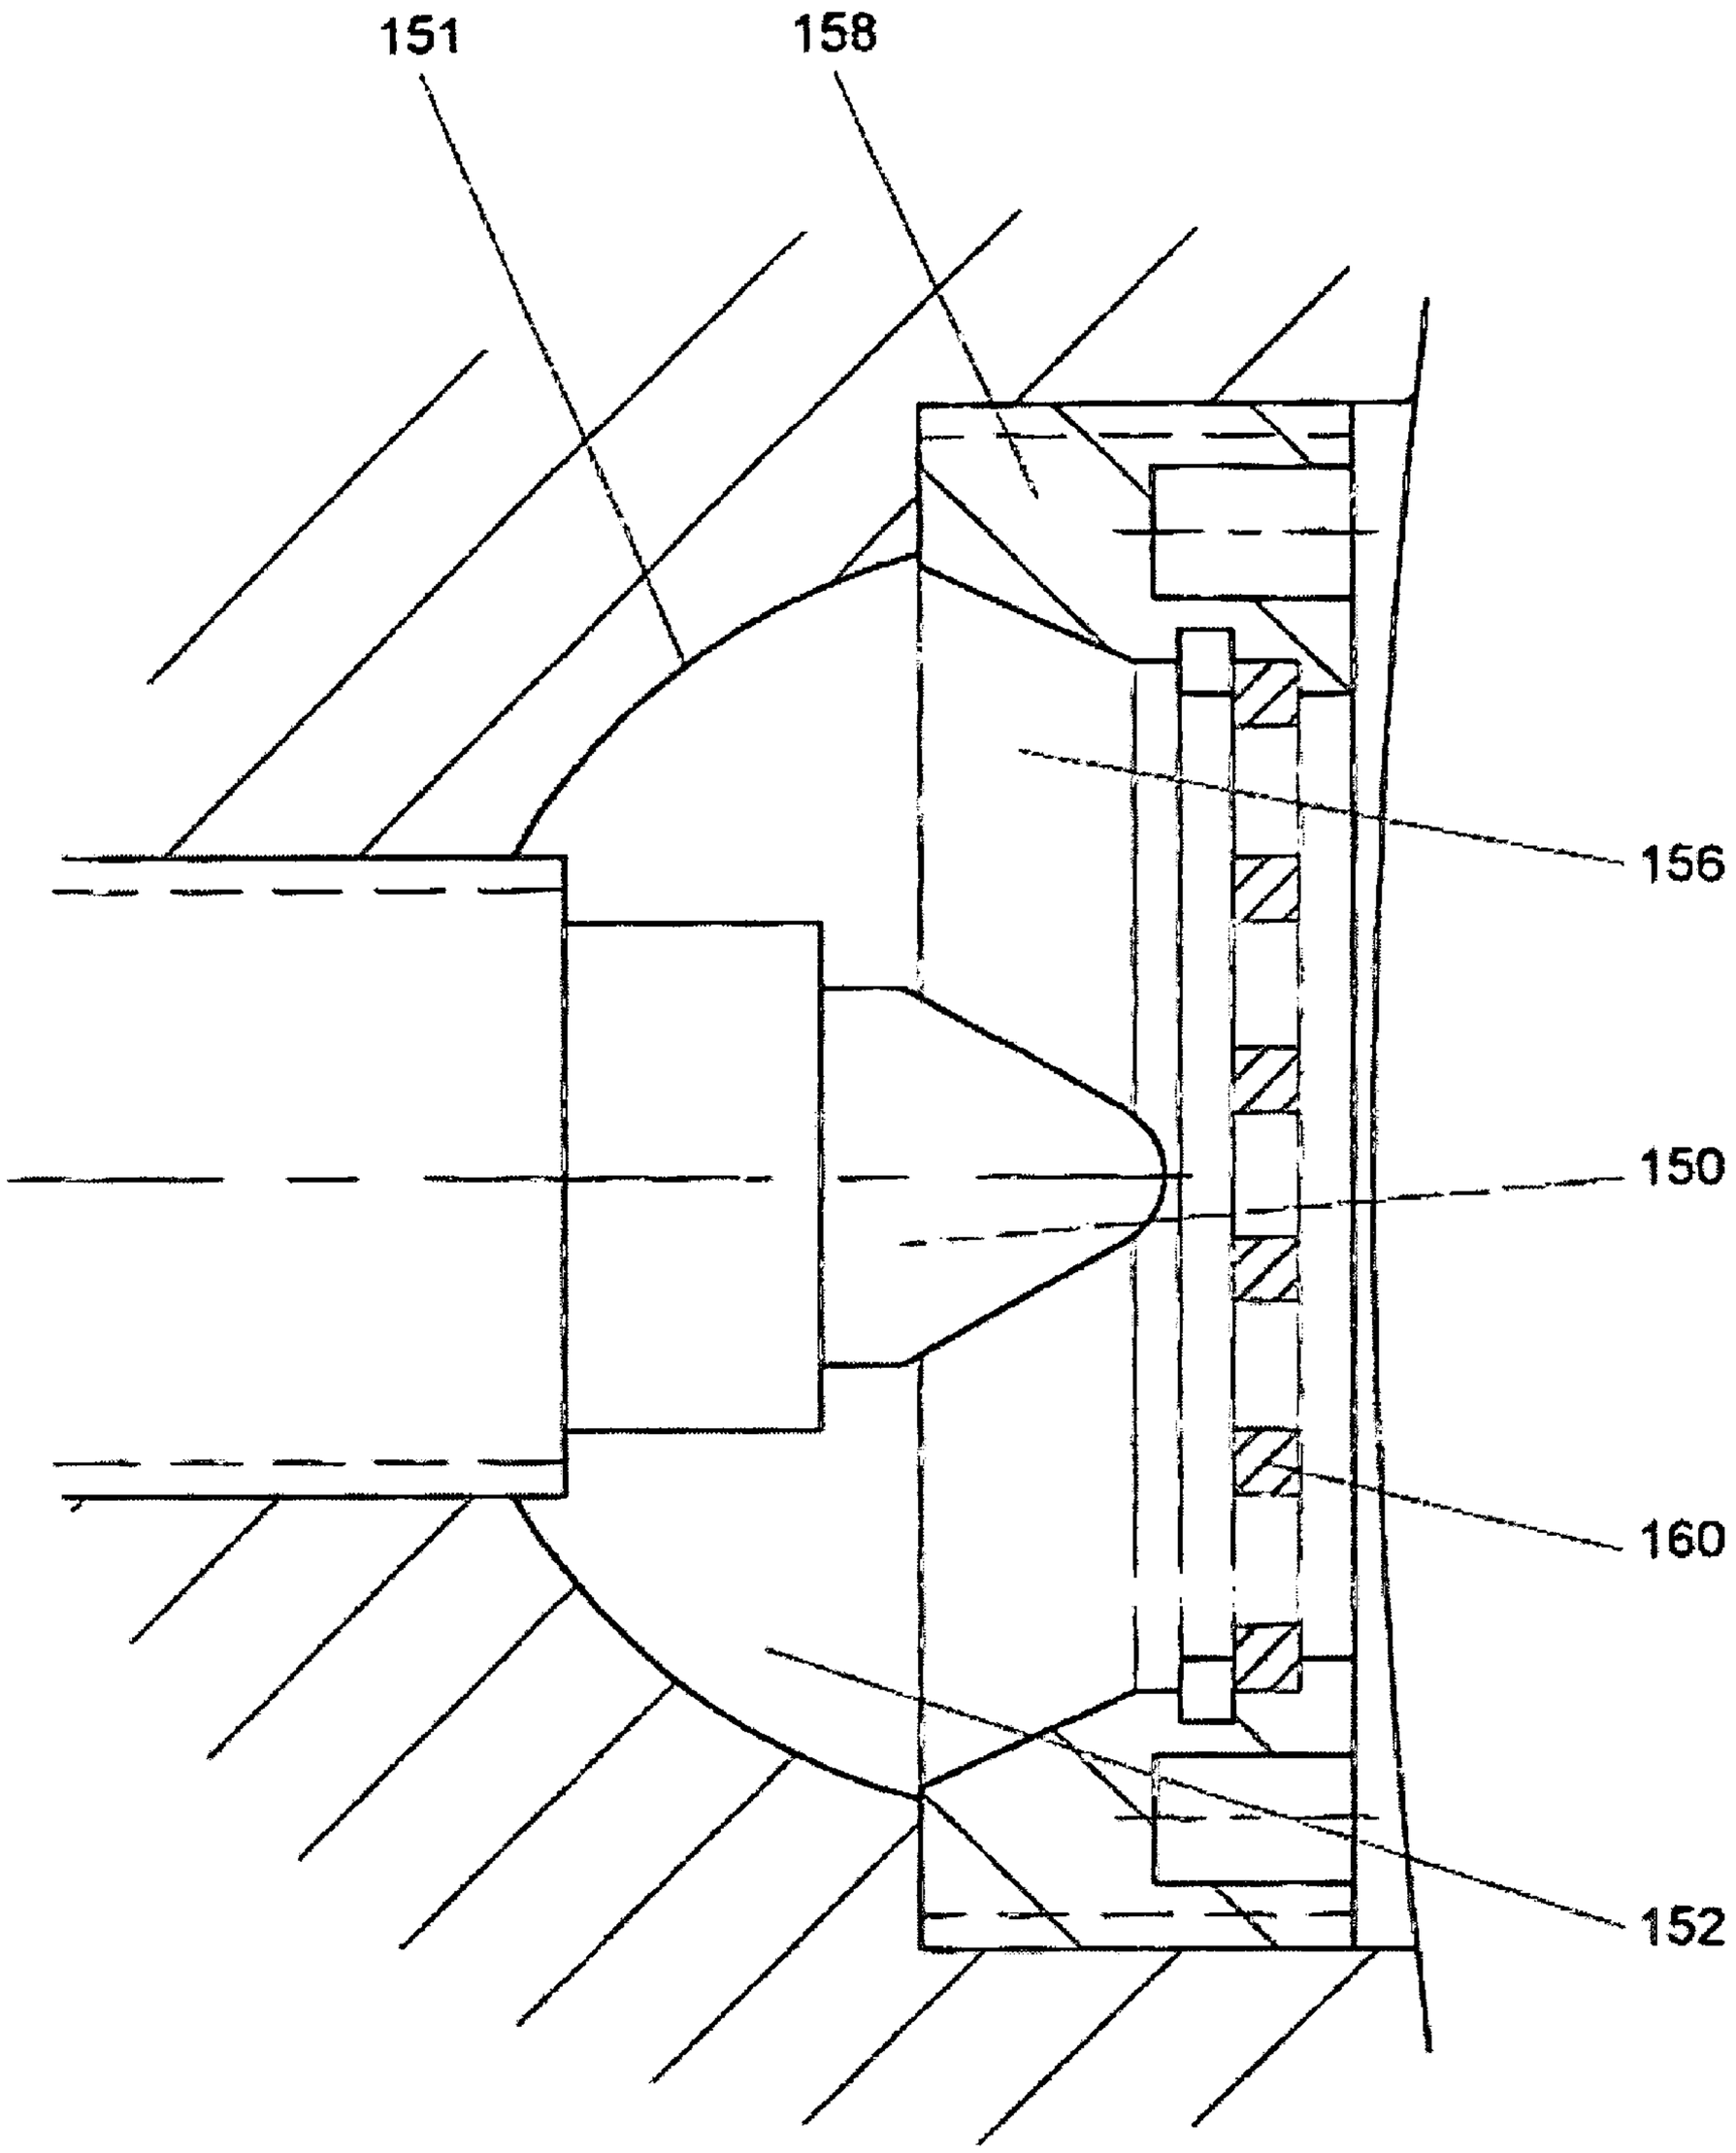

Fig. 8A

ROTARY PISTON MACHINE WITH AN OVAL ROTARY PISTON

THIS IS A CONTINUATION-IN-PART APPLICATION OF CURRENTLY U.S. patent application Ser. No. 11/212,496 FILED Aug. 26, 2005, now U.S. Pat. No. 7,117,840 WHICH IS A CONTINUATION OF INTERNATIONAL APPLICATION NO. PCT/EP2004/001921 FILED Feb. 26, 2004 WHICH CLAIMS PRIORITY OF GERMAN PATENT APPLICATION NO. 103 08 831.8 FILED Feb. 27, 2003.

FIELD OF THE INVENTION

The invention relates to an internal combustion engine having at least one working chamber limited by a piston and means for fuel injection.

BACKGROUND OF THE INVENTION

Combustion Engines with pre-combustion chambers are known from various prior art patents and other publications, such as AT 196669 E; AU 4634597A; AU 725961B; BR 9712894 A; CA 2271016 A1; CA 2271016 A; CH 691401 A; DE 69703215 T2; EP 937196 B1.

However, the known pre-combustion chamber has not been successfully commercialized. Many experiments have shown, that the pre-combustion chamber causes an increase of the efficiency of the combustion engines. This is only possible up to a rotary frequency of the shaft up to about 3000 min^{-1}. Conventional pre-combustion chambers operated at higher frequencies cause a considerable decrease of the efficiency and a poor quality of the exhaust gases. The reason for this bad performance is the transport of the burnt fuel from the pre-combustion chamber to the main combustion chamber through a narrow passage requiring a time interval of more than 20 ms.

Schapiro-Engines are known with a different design of a rotational piston engine. This new kind of engine may operate with a considerably different rotational speed of the rotational piston and the shaft. Depending on the design of the engine the piston of such engines may, for example, rotate three to seven times slower than the shaft. Accordingly, the admissible time for transport of the gases combusted in the pre-combustion chamber into the primary combustion chamber is three to seven times longer in such engines.

Therefore, the critical limit for the rotational frequency of the shaft of a rotational piston engine with a pre-combustion chamber may be in the order of 9000 to 20000 min^{-1}.

SUMMARY OF THE INVENTION

It is an object of the invention to provide a combustion engine with internal combustion and an increased efficiency. According to the invention this object is achieved in that fuel injection means are arranged in a separate ignition chamber communicating with said working chamber, and means for tuning said ignition chamber and fuel injected by said fuel injection means such that substantially only burnt, expanding combustion gas enters the working chamber.

Conventional pre-combustion chambers serve the purpose of producing turbulences and heating the fuel. They do not intend to separate the operating method of a combustion engine in an essentially separated combusting and working process.

Such a separation is the main intention of the present invention. The main differences of the invention with respect to the prior art can be summarized as follows:

While the form of known pre-combustion chambers is similar to a canal to produce turbulences along the longer path and to complete the combustion as much as possible the present invention seeks to optimize the form of the ignition chamber to effect the best possible combustion by optimizing the surface/volume-ratio.

The direction of the movement of the flame front of prior art designs corresponds to the direction of the torch of the injection nozzle towards the main combustion chamber. In such a construction the fuel must be combusted along the torch in order to achieve a good combustion ratio when entering into the working chamber.

Depending on the power the transporting of the combusted gas requires a time of about 20 to 30 ms. This is caused by the combustion kinetics and catalytic after-burning processes during passage of the grating or net in the transition passage. Conventional reciprocating piston engines do not allow for such times in the high power working range. The new rotational piston engines, however, allow such transition times because the piston of the rotational piston engines of the Schapiro-kind rotate three to seven times slower than the shaft. If, for example, the piston rotates five times slower than the shaft, rotational frequencies of about 15000 min^{-1} are well possible.

Although the invention will be described with a Schapiro-Engine with two shafts, the person skilled in the art will appreciate, that an injection device disposed within the pre-combustion chamber in the above described way will also be useful in engines of other kinds, with for example one shaft, and that the scope of the present invention is limited only by the appending claim.

Embodiments of the invention are described hereinbelow with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** shows a cross sectional view of a rotary piston machine having two shafts, wherein a rotary piston, the cross section of which is an oval of third order, is guided in a cavity, the cross section of which is an oval of second order.

FIG. **2** is an illustration similar to FIG. **2** and shows the rotary piston in a blocking position.

FIG. **3** is an illustration similar to FIG. **2** and shows the rotary piston during the next interval of motion.

FIG. **4** shows a cross sectional view of a rotary piston machine having two shafts, wherein the rotary piston, the cross section of which is an oval of fifth order, is guided in a cavity, the cross section of which is an oval of fourth order.

FIG. **4**A shows a modification of the arrangement of FIG. **4**.

FIG. **5** shows a cross sectional view of a rotary piston machine having two shafts, wherein a rotary piston, the cross section of which is an oval of seventh order, is guided in a cavity, the cross section of which is an oval of sixth order.

FIG. **6** is a schematic illustration of rotary speed regulating means used in a rotary piston machine of FIG. **1**.

FIG. **7**A is a schematic enlarged illustration of a seal used in a rotary piston machine of the type illustrated in FIGS. **1** to **5**, sealing being effected between a sealing ledge and a surface section of the rotary piston having the smaller radius of curvature.

FIG. **7**B is a schematic enlarged illustration of a seal used in a rotary piston machine of the type illustrated in FIGS. **1** to **5**, sealing being effected between a sealing ledge and a surface section of the rotary piston having the larger radius of curvature.

FIG. **8** shows, at an enlarged scale, a detail of the rotary piston machine of FIG. **4**A.

FIG. **8**A shows the detail of FIG. **8** at a further enlarged scale.

DESCRIPTION OF THE EMBODIMENTS OF THE INVENTION

Referring to FIG. **1**, numeral **10** designates a housing. A cavity **12** is defined in this housing **10**. The cross section of the cavity represents an oval of second order or is "bi-oval". Thus the cross section of the cavity is formed by two circular arcs **14** and **16** of relatively small radius of curvature and, alternating therebetween, two circular arcs **18** and **20** of relatively large radius of curvature. The circular arcs join continuously and differentiably.

A rotary piston **22** is guided in cavity **12**. The cross section of the rotary piston **22** represents an oval of third order or is "tri-oval". Accordingly, the circumference of the cross section consists of three pairs of circular arcs, each pair comprising a circular arc of relatively small radius of curvature **24**, **26** and **28**, respectively, and a circular arc of relatively large radius of curvature **30**, **32** and **34**, respectively. The circular arcs of small and large radii of curvature join alternatingly and also continuously and differentiably. The small radii of curvature of the rotary piston **22** are equal to the small radii of curvature of the cavity **12**, and, in the same way, the large radii of curvature of the rotary piston **22** are equal to the large radii of curvature of the cavity **12**. The cross section of the cavity **12** looks similar to an ellipse. The cross section of the rotary piston looks similar to a triangle of arcs with rounded corners.

The rotary piston **22** has a central aperture **36**. The cross section of the aperture **36** represents also an oval of third order. This oval of third order is composed of three circular arcs of relatively small radii of curvature **38**,**40** and **42** and of three circular arcs of relatively large radii of curvature. The circular arcs **38**, **40** and **42** having small radii of curvature and the circular arcs **44**,**46** and **48** having large radii of curvature join alternatingly and continuously and differentiably, whereby an oval similar to a triangle of arcs with rounded corners is formed. The planes of symmetry **50**, **52** and **54** of the aperture **36** coincide with the planes of symmetry of the rotary piston **22**.

The aperture **36** has an internal gear **56**. This internal gear **56** has three concave-arcuate gear racks **58**, **60** and **62** substantially along the circular arcs **44**, **46** and **48**, respectively. Between these concave-arcuate gear racks **58**, **60** and **62**, convex-arcuate (or straight) gear racks **64**, **66** and **68** are provided in the region of the circular arcs of small radius of curvature.

Two parallel shafts **70** and **72** with pinions **74** and **76**, respectively, extend through the aperture **36**. The axes of the shaft are located in the plane of symmetry **77**, extending through the circular arcs **18** and **20**, of the cavity **12**. The pinion of one shaft, in FIG. **1** the pinion **74** of shaft **70**, is located in the "corner of the triangle of arcs", i.e. in the region of the circular arc **38** of small radius of curvature and meshes with the internal gear **56**, as will be described below. The pinion of the other shaft, in FIG. **1** pinion **76** of shaft **72**, meshes with the opposite concave-arcuate gear rack, in FIG. **1** the gear rack **60**.

The rotary piston **22** subdivides the bi-oval cavity **12** into two working chambers **80** and **82**. In FIG. **1**, the rotary piston machine is illustrated schematically as an internal combustion engine. Accordingly, an inlet valve **84** or **86** and an outlet valve **88** or **90** is shown for each working chamber **80** and **82**, respectively. Furthermore, a combustion chamber **92** or **94** with a spark plug or a fuel injector **98** and **98** communicates with each working chamber **80** and **82**, respectively. The working chambers **80** and **82** with the valves and spark plugs or fuel injectors are arranged symmetrical to the plane of symmetry passing through the circular arcs **14** and **16** of small radii of curvature.

Pairs of adjacent sealing ledges **100**A and **100**B and **102**A and **102**B are provided in the regions **18** and **20**, respectively, of large radii of curvature. The sealing ledges **100**A and **100**B and **102**A and **102**B, respectively, are symmetrical to the plane of symmetry passing through the circular arcs **18** and **20** of large radii of curvature of the cross section.

FIG. **7**A shows the sealing ledges **100**A and **100**B with a position in the area of the transition from the small radius of curvature r_1 of the outer surface of the rotary piston **22**, on the right in FIG. **7**A, to the area of the larger radius of curvature r_2 of this outer surface, on the left in FIG. **7**A. The sealing ledge **100**A has a concave-cylindrical inner surface, the radius of curvature of which is equal to the larger radius of curvature r_2. The sealing ledge **100**B has a concave-cylindrical inner surface, the radius of curvature of which corresponds to the smaller radius of curvature r_1. It will be apparent, that the inner surface of the sealing ledge **100**A closely engages the surface of the rotary piston complementary thereto, in the area of the radius of curvature r_2. In the area, in which the radius of curvature of the surface of the rotary piston is smaller, namely r_1, a wedge-shaped gap **100**C is formed between the inner surface of the sealing ledge **100**A and the rotary piston **22**. The sealing ledge **100**B has a concave-cylindrical inner surface, the radius of curvature is equal to the smaller radius of curvature r_1. It will be apparent, that the inner surface of the sealing ledge **100**B closely engages the surface of the rotary piston **22** complementary thereto, in the area of the radius of curvature r_1, of the rotary piston **22**. In the area, in which the radius of curvature of the surface of the rotary piston **22** is larger, namely r_2, a wedge-shaped gap **100**D is formed between the sealing ledge **100**B and the rotary piston **22**. In the transition region illustrated, both sealing ledges, on a respective portion of the inner surface, are in surface contact with the outer surface of the rotary piston, whereby a surface-to-surface seal is ensured.

FIG. **7**B shows, in similar manner, the seal in the area of the transition from the large radius of curvature r_2 to the smaller radius of curvature r_1. When the pair of sealing ledges **100**A and **100**B engages an area of the rotary piston having large radius of curvature r_2 only or an area having small radius of curvature r_1, only, either the sealing ledge **100**A or the sealing ledge **100**B ensures a surface contact with its respective total inner surface.

The described arrangement operates in the following manner. The rotary piston **22** rotates counter-clockwise in FIG. **1**. When doing so, the rotary piston **22** rotates about the shaft **70** and slides with low speed along the inner wall of the cavity **12** in the area of the large radius of curvature. The axis of the shaft **70** passes through the center of curvature of the circular arc **24** of smaller radius of curvature. The circular arc **24** is tangent to the circular arc **18** of the cross section of the cavity **12**. The opposite area of the outer surface of the rotary piston **22** with large radius of curvature engages the area of the inner wall of the cavity **12** corresponding to the circular arc **20**. This area of the inner wall has the same radius of curvature as the engaging area of the outer surface of the rotary piston. Thus, there is a shape-adapted surface-to surface engagement. During the rotary movement of the rotary piston, this area of the outer surface of the rotary piston slides along the corresponding area of the inner wall.

Thereby, the volume of the working chamber **80** is increased, while the volume of the working chamber **82** becomes smaller. During this process, the shaft **70** is rotated relatively slowly, while a relatively fast rotation of the shaft **72** occurs.

This movement is continued, until the right blocking position in FIG. **2** is reached. Then the area of the outer surface of the rotary piston is located in that area of the inner wall of cavity **12**, which corresponds to the circular arc **16**. Both areas have the same, namely the small radius of curvature. The areas of the outer surface of the rotary piston corresponding to the circular arcs **32** and **34** having the large radius of curvature engage that areas of the inner wall of cavity **12**, which correspond to the circular arcs **18** and **20**, respectively, of the cross section. These radii of curvature, again, are equal. Thus the volume of the working chamber **82**, apart from the combustion chamber **82**, is reduced to zero, while the working chamber **82** has its maximum volume. Then the shaft **72** with the pinion **76** is located in the region which corresponds to the circular arc **40**, thus, so to say, in the left lower "corner" of the triangle of arcs. The rotary piston **22** is, however, not able to further rotate about the shaft **70** as instantaneous axis of rotation. This position is illustrated in FIG. **2**.

For a further rotation, which may, for example, be effected by igniting fuel in the combustion chamber **94** in an internal combustion engine or by conducting a working fluid into the working chamber **82**, the instantaneous axis of rotation "jumps" to the axis of shaft **72**. The rotary piston **22** can now continue to rotate counter-clockwise, but now about the shaft **72**.

The further motion sequence is then, referenced to the new instantaneous axis of rotation, the same as described before with reference to the shaft **70** as instantaneous axis of rotation.

Consecutive intervals of motion occur, when the rotary piston **22** rotates. Each interval of motion extends from one of the described blocking positions to the next one. In each interval of motion, the volume of one working chambers, for example **80**, increases from zero to a maximum, while the volume of the other working chamber decreases from the maximum down to zero. During the next interval of motion, it is the other way round: The volume of the working chamber **82** increases from zero (FIG. **2**) up to a maximum, while the volume of the working chamber **80** decreases again (FIG. **3**).

In the position of FIG. **2**, the kinematics is not unambiguous. Each of the two shafts could with its axis define an instantaneous axis of rotation. If then, for example, by working fluid conducted into the working chamber **82**, a force to the left is exerted on the rotary piston **22**, this force could result in a translatory motion in horizontal direction instead of a rotary motion about an instantaneous axis of rotation. Thereby, the rotary piston **22** would be wedged in the cavity **12**.

This risk can be avoided in that, in the position of FIG. **2**, rotary speed regulating means are used to temporarily compel a lower rotary speed of the shaft **72** than the rotary speed of shaft **70**. Then the rotary piston is forced to rotate about this shaft **72**, while the other shaft **70** permits the concave-arcuate gear rack to roll off on the pinion **74**.

This is schematically illustrated in FIG. **6**. Sensors **140** detect the position of the rotary piston **22** in the cavity **12**. The sensors signal when the rotary piston has reached a blocking position. Then a control device **142**, to which the signals from the sensors are applied, actuates devices **144** and **146** by which, alternatingly, depending on which blocking position had been reached, rotary speeds are temporarily, for a short time, rotary speeds are forced on shaft **70** or shaft **72**, respectively, For example, a lower rotary speed is forced on shaft **70**, and a higher rotary speed is forced on shaft **72** or vice versa. In the simplest case, these devices **144** and **146** may be braking devices which, in the blocking positions, are caused to act, alternatingly for a short time, on the shaft **70** or the shaft **72**, while the respective other shaft remains unbraked.

The radii of the reference circles of the pinions are substantially equal to the small radii of curvature of the oval of second order defining the aperture **36**. If the internal gear **56** followed the oval of the aperture continuously, then the pinions would be caught, each time, in the blocking positions of the rotary piston **22**. The "corners" of the "triangle of arcs" could not roll over the pinions. For this reason, the concave-arcuate gear racks are interconnected, in the region of the circular arcs **38**, **40**, **42** of smaller radii of curvature, are interconnected by short straight or convex-arcuate gear racks **64**, **66** or **68**, respectively. The convex-arcuate gear racks **64**, **66** and **68** permit the internal gear **56**, and thereby the rotary piston **22**, to continue its rotation. They are so dimensioned that, in each blocking position, one of the concave-arcuate gear racks **58**, **60** or **62** engages the pinion **74** or **76** immediately after the pinion **74** or **76** has disengaged the preceding gear rack **62**, **58** or **60**, respectively. In this way, each pinion continuously engages one of the concave-arcuate gear racks **64**, **66** or **68**. The short convex-arcuate or straight gear racks ensure transition without interrupting the form fit but also without blocking.

FIG. **4** shows a rotary piston machine having a cavity, the cross section of which represents an oval **106** of fourth order. A rotary piston **108**, the cross section of which represents an oval **110** of fifth order is guided in the cavity **108**. Also here, the rotary piston **108** has an aperture **112**, the shape of which represents an oval **114** of fifth order. The axes of symmetry of rotary piston **108** and aperture coincide. The aperture has an internal gear **116**. The internal gear **116** meshes with two pinions **118** and **120**. The pinions **118** and **120** are attached to two housing-fixed shafts **122** and **124**, respectively. The axes **126** and **128** of the shafts **122** and **124**, respectively extend in an axis of symmetry of the cavity **104**.

The rotary piston **108** subdivides the cavity into two working chambers **130** and **132**. When the rotary piston rotates, the volume of one of such working chambers is increased and the volume of the other chamber is decreased.

The operating cycle is similar to the operating cycle of the embodiment of FIGS. **1** to **3**. The rotary piston **108** rotates, for example, about the axis **126** of one shaft **122** up to a blocking position. Then the instantaneous axis of rotation jumps into the axis **128** of the other shaft **124**. The rotary piston continues to rotate counter-clockwise in FIG. **4** up to the next blocking position. Course of motion between two consecutive blocking positions is an "interval of motion". In each interval of motion, the volume of the working chamber **130** increases from zero to a maximum and the volume of the working chamber **132** decreases from a maximum to zero, or vice versa. The working chambers are located always on both sides of the plane of symmetry containing the axes **126** and **128**. They do not travel around the cavity.

In FIG. **4**, valves and spark plugs or fuel injectors are (schematically) shown for each working chamber.

FIG. **4**A shows a rotary piston machine similar to FIG. **4**. Corresponding elements bear the same reference numerals as there. Details of the rotary piston machine of FIG. **4**A are shown, at an enlarged scale, in FIGS. **8** and **8**A.

In the rotary piston machine of FIG. **4**A, numeral **150** designates a fuel injector. The fuel injector extends into a combustion chamber. This combustion chamber is so dimensioned and shaped, that the injected fuel is combusted sub-

stantially in the combustion chamber only. Then only the expanding combustion gases emerge into the expanding working chamber. The injection may be metered time-dependent or dependent on the rotation of the rotary piston such that it is adapted to the change of volume of the working chamber **130** or **132**. There is no flame front within the working chamber. The propagation of flame fronts in an expanding working chamber presents problems in prior art rotary piston machines.

In the embodiment of FIGS. **8** and **8**A, the combustion chamber comprises a spherical calotte-shaped recess of the housing, which communicates with a frustro conical space **156** tapering towards the working chamber. The space **156** is formed in an insert **158**, which is screwed in a threaded recess of the wall of the working chamber **130** or **132**. The combustion chamber **152** is closed by a grid or net **160**. The fuel injector **150** terminates in a cone rounded at the tip, injection taking place through nozzle openings in the surface of this cone.

The described arrangement of the fuel injector in a combustion chamber such that combustion takes place substantially within the combustion chamber and flame fronts in the working chambers are avoided, is also applicable to other machines, for example in reciprocating internal combustion engines.

FIG. **5** shows a rotary piston machine, wherein a rotary piston, the cross section of which represents an oval of seventh order, is guided in a cavity the cross section of which represents an oval sixth order. Setup and operation are, apart from the orders of the ovals, similar to that of the embodiment of FIG. **4**. Corresponding elements are designated by the same reference numerals as in FIG. **4**, however marked by the suffix "A".

What is claimed is:

1. An internal combustion engine comprising:

at least one working chamber formed by a rotary piston and fuel injection means, said fuel injection means being arranged in a separate ignition chamber communicating with said working chamber through a transition passage, said transmission passage comprises a grid-type formation arranged between the ignition chamber and the working chamber, said fuel injection means injects a fuel through the transmission passage into the ignition chamber; and

the fuel injector means extends into a combustion chamber, said combustion chamber is configured so that the injected fuel is combusted only in the combustion chamber, so that a flame front resulted from said combustion is initiated in the combustion chamber, and said flame front with resulting torch-like flames and flame plumes do not extend into the transition passage and into the working chamber,

wherein the fuel injector means and the rotary piston are fluidly connected at all times.

2. An internal combustion engine according to claim **1**; wherein said fuel ignition means injects the fuel at the transmission passage into the ignition chamber.

3. An internal combustion engine according to claim **1**; wherein said grid type formation connects the ignition chamber with the working chamber.

4. An internal combustion engine according to claim **2**, wherein the ignition chamber comprises a substantially spherical recess formed within a housing of the engine, said recess communicating with a frustro conical space tapering in the direction of the working chamber, said frustro conical space forms a part of an insert operatively engaging a wall of the working chamber, a grid-type formation is disposed within said insert at an interface between the ignition chamber and the working chamber.

5. An internal combustion engine according to claim **4**, wherein. said insert is adapted to threadably engage a recess formed within the wall of the working chamber.

6. An internal combustion engine according to claim **5**, wherein said grid-type formation is in a form of a net.

7. An internal combustion engine according to claim **1**; wherein the ignition chamber comprises a substantially spherical recess formed within a housing of the engine, said recess communicating with a frustro conical space tapering in the direction of the working chamber, said frustro conical space forming a part of an insert operatively engaging a wall of the working chamber, the grid-type formation is disposed within said insert at an interface between the ignition chamber and the working chamber.

8. An internal combustion engine according to claim **7**, wherein said insert is adapted for threadable engagement with a recess formed within the wall of the working chamber.

9. An internal combustion engine according to claim **8**, wherein said grid-type formation is in a form of a net.

* * * * *