US008770349B2

(12) **United States Patent**
Madar

(10) **Patent No.: US 8,770,349 B2**
(45) **Date of Patent: Jul. 8, 2014**

(54) **SAFETY DEVICES FOR ELEVATORS WITH REDUCED CLEARANCES**

(76) Inventor: **Yoram Madar**, Rishon Lezion (IL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 437 days.

(21) Appl. No.: **13/162,692**

(22) Filed: **Jun. 17, 2011**

(65) **Prior Publication Data**

US 2011/0240413 A1 Oct. 6, 2011

(51) **Int. Cl.**
B66B 5/28 (2006.01)

(52) **U.S. Cl.**
USPC **187/343**

(58) **Field of Classification Search**
CPC B66B 1/32; B66B 1/28; B66B 1/48
USPC 187/343, 305, 373, 306
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,911,015	A *	5/1933	Crabbe et al.	187/316
7,278,517	B2	10/2007	Gut et al.	
2008/0245619	A1 *	10/2008	Monzon-Simon et al.	187/393

FOREIGN PATENT DOCUMENTS

EP	1118574	7/2001
EP	1167268	1/2002
FI	117627	12/2006
FR	2912390	8/2008
JP	2005170565	6/2005
WO	WO2007122282	11/2007

OTHER PUBLICATIONS

Machine Translation of EP 1118574.*

* cited by examiner

Primary Examiner — William E Dondero
Assistant Examiner — Diem Tran
(74) *Attorney, Agent, or Firm* — Michael J. Feigin, Esq.; Feigin & Associates, LLC

(57) **ABSTRACT**

In an elevator shaft (**100**), preferably having an anti creeping device (**140**) and reduced ends, the reduced ends being the elevator pit and the elevator overhead, a load sensing safety apparatus (**110**) facilitated to activate the emergency safety gear of the elevator, according to teachings of the present invention, the load sensing safety apparatus including a movable plate, one or more spacing devices (**120**) one or more pressure sensors (**150**), and a locking trigger mechanism for triggering the activation of the emergency safety gear of the elevator.

16 Claims, 13 Drawing Sheets

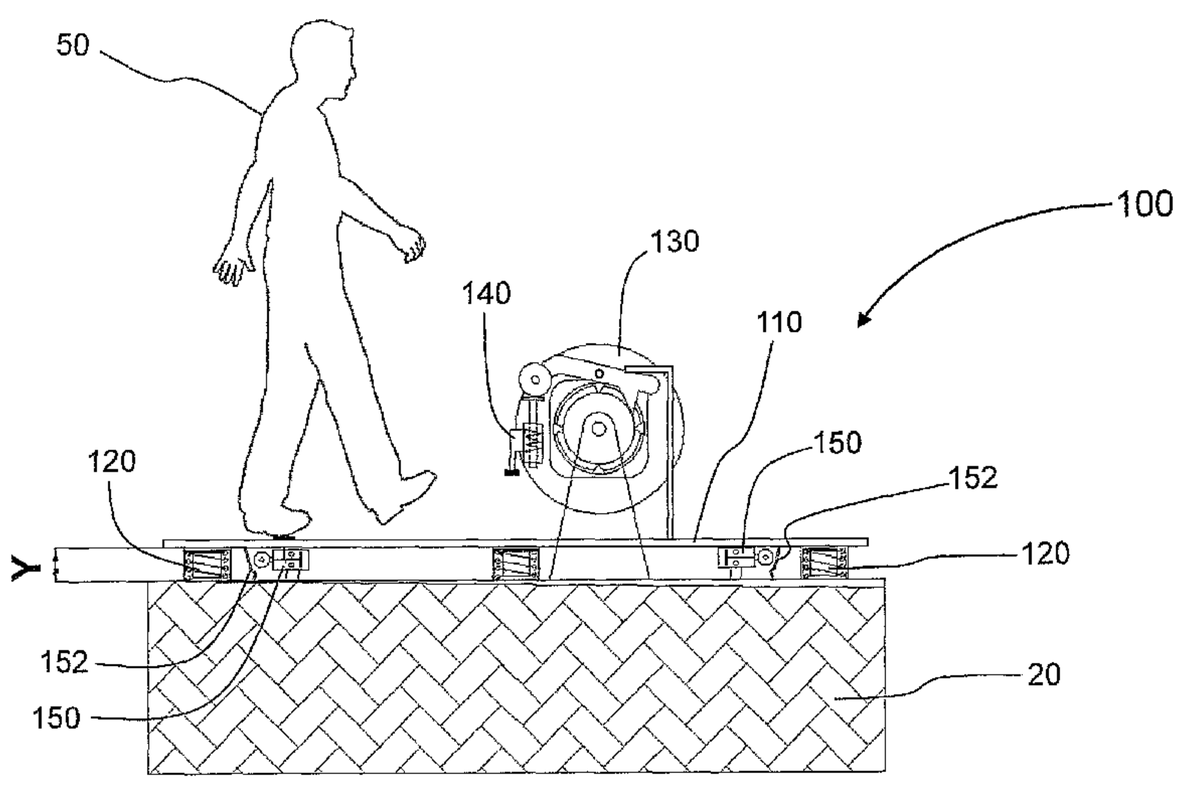

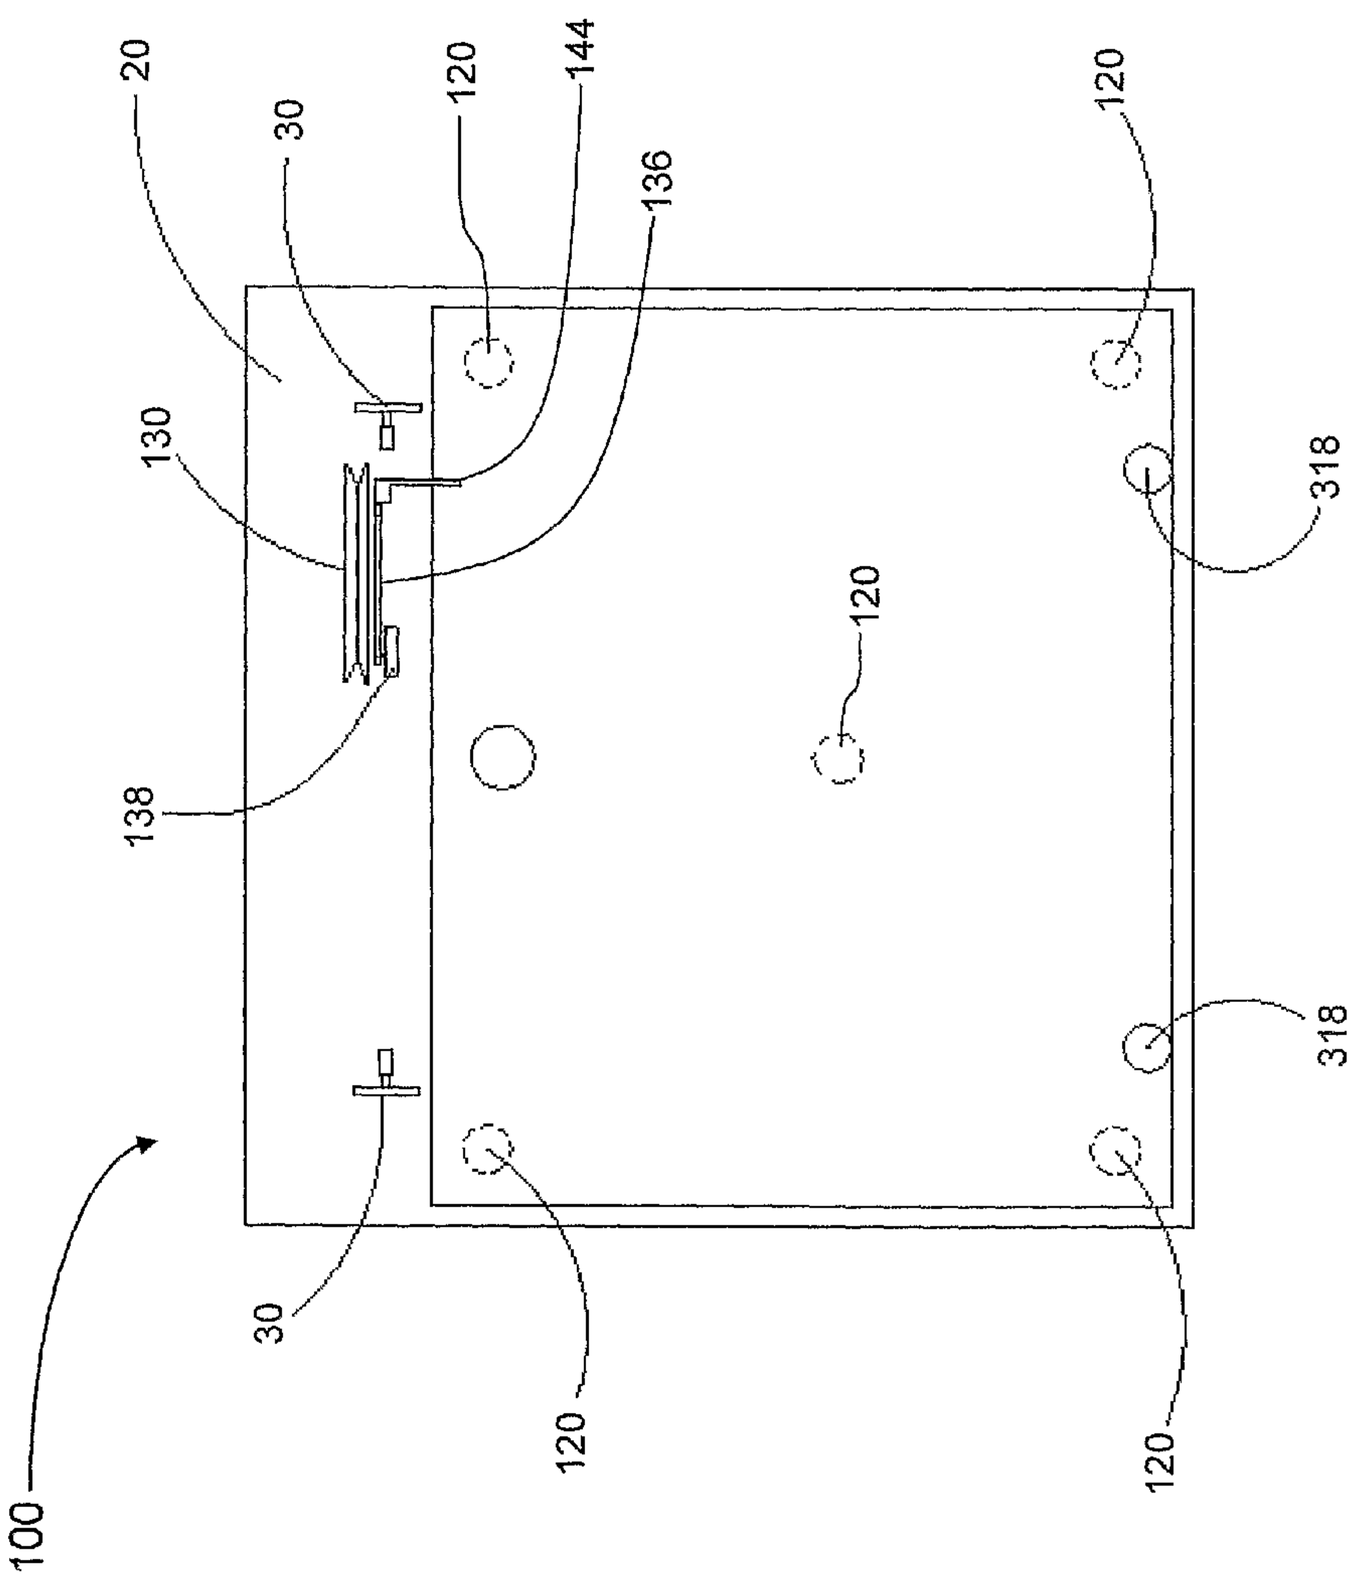

Fig 1

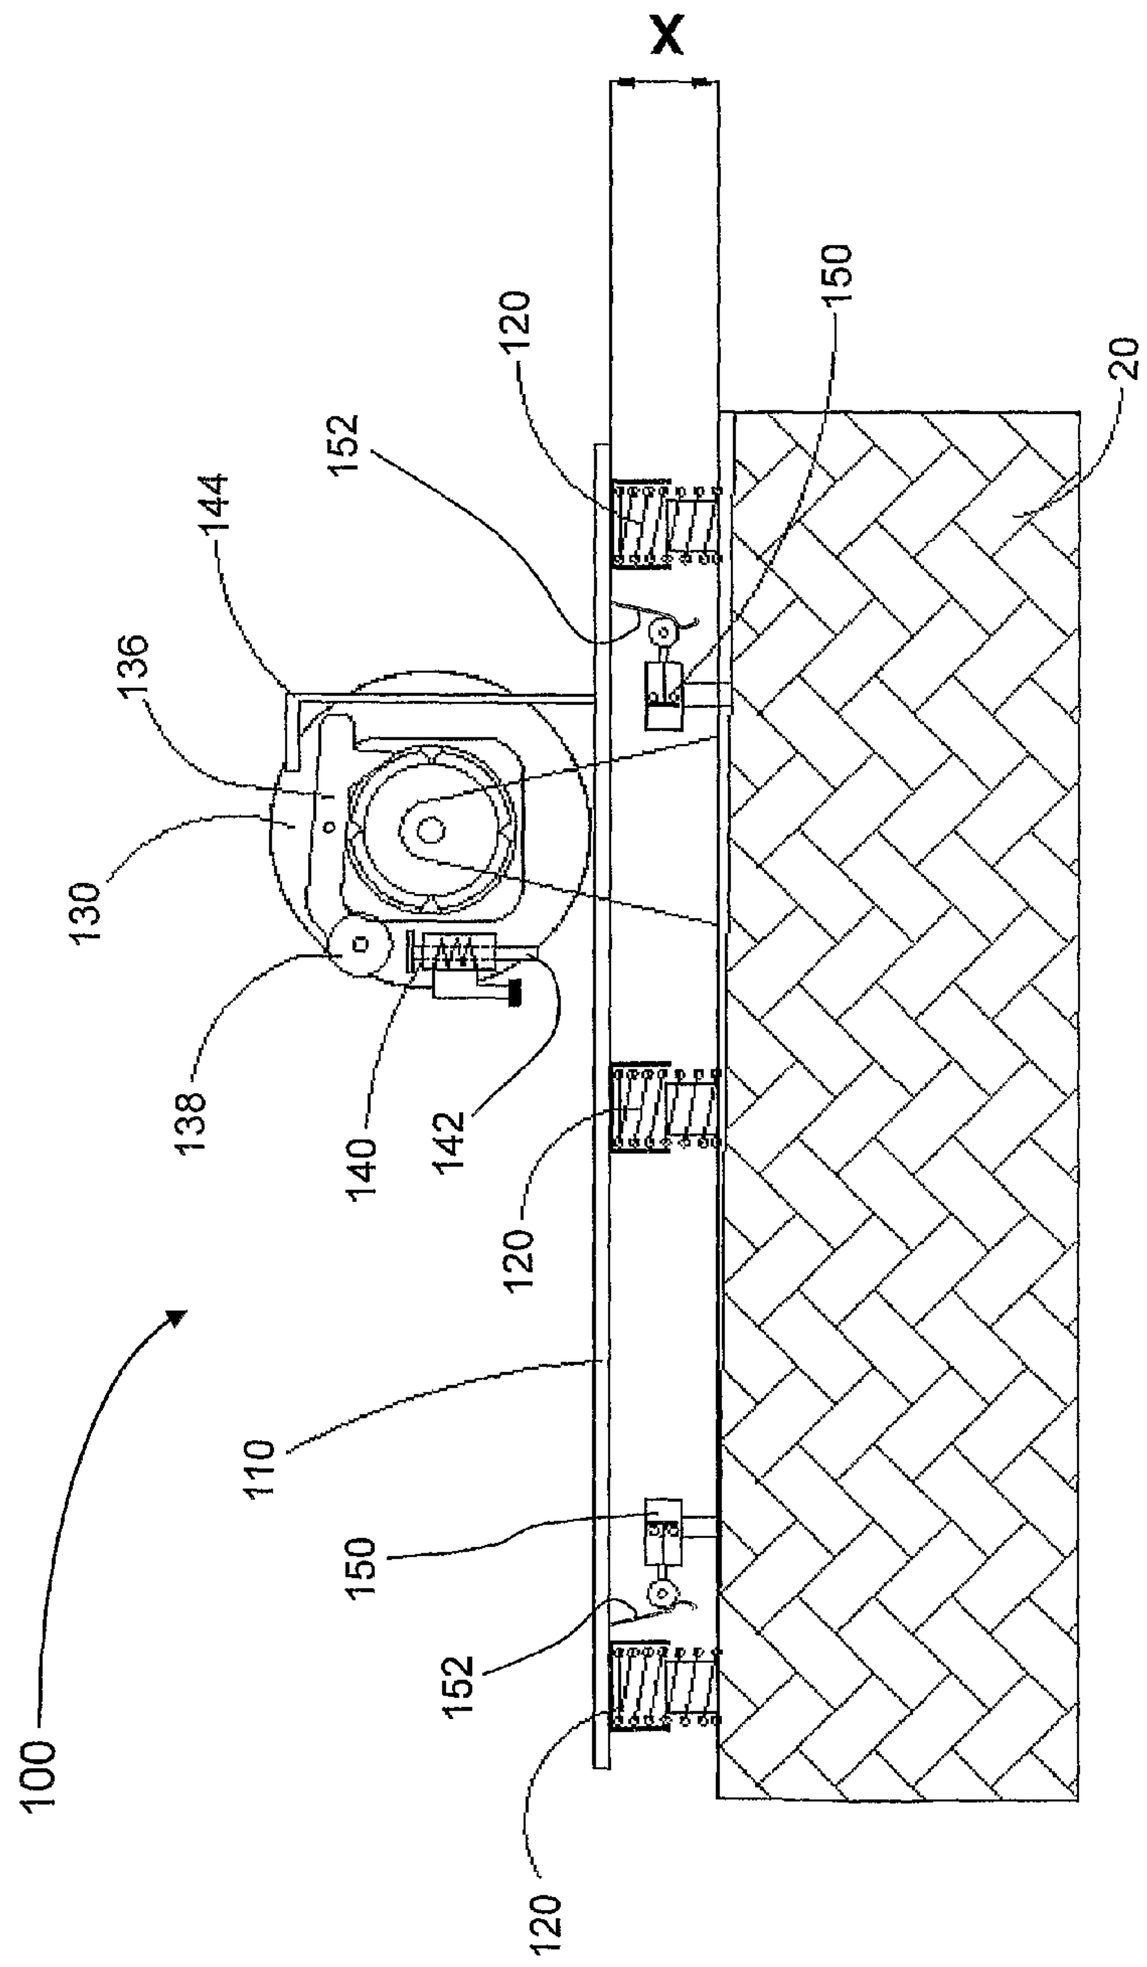

Fig 2

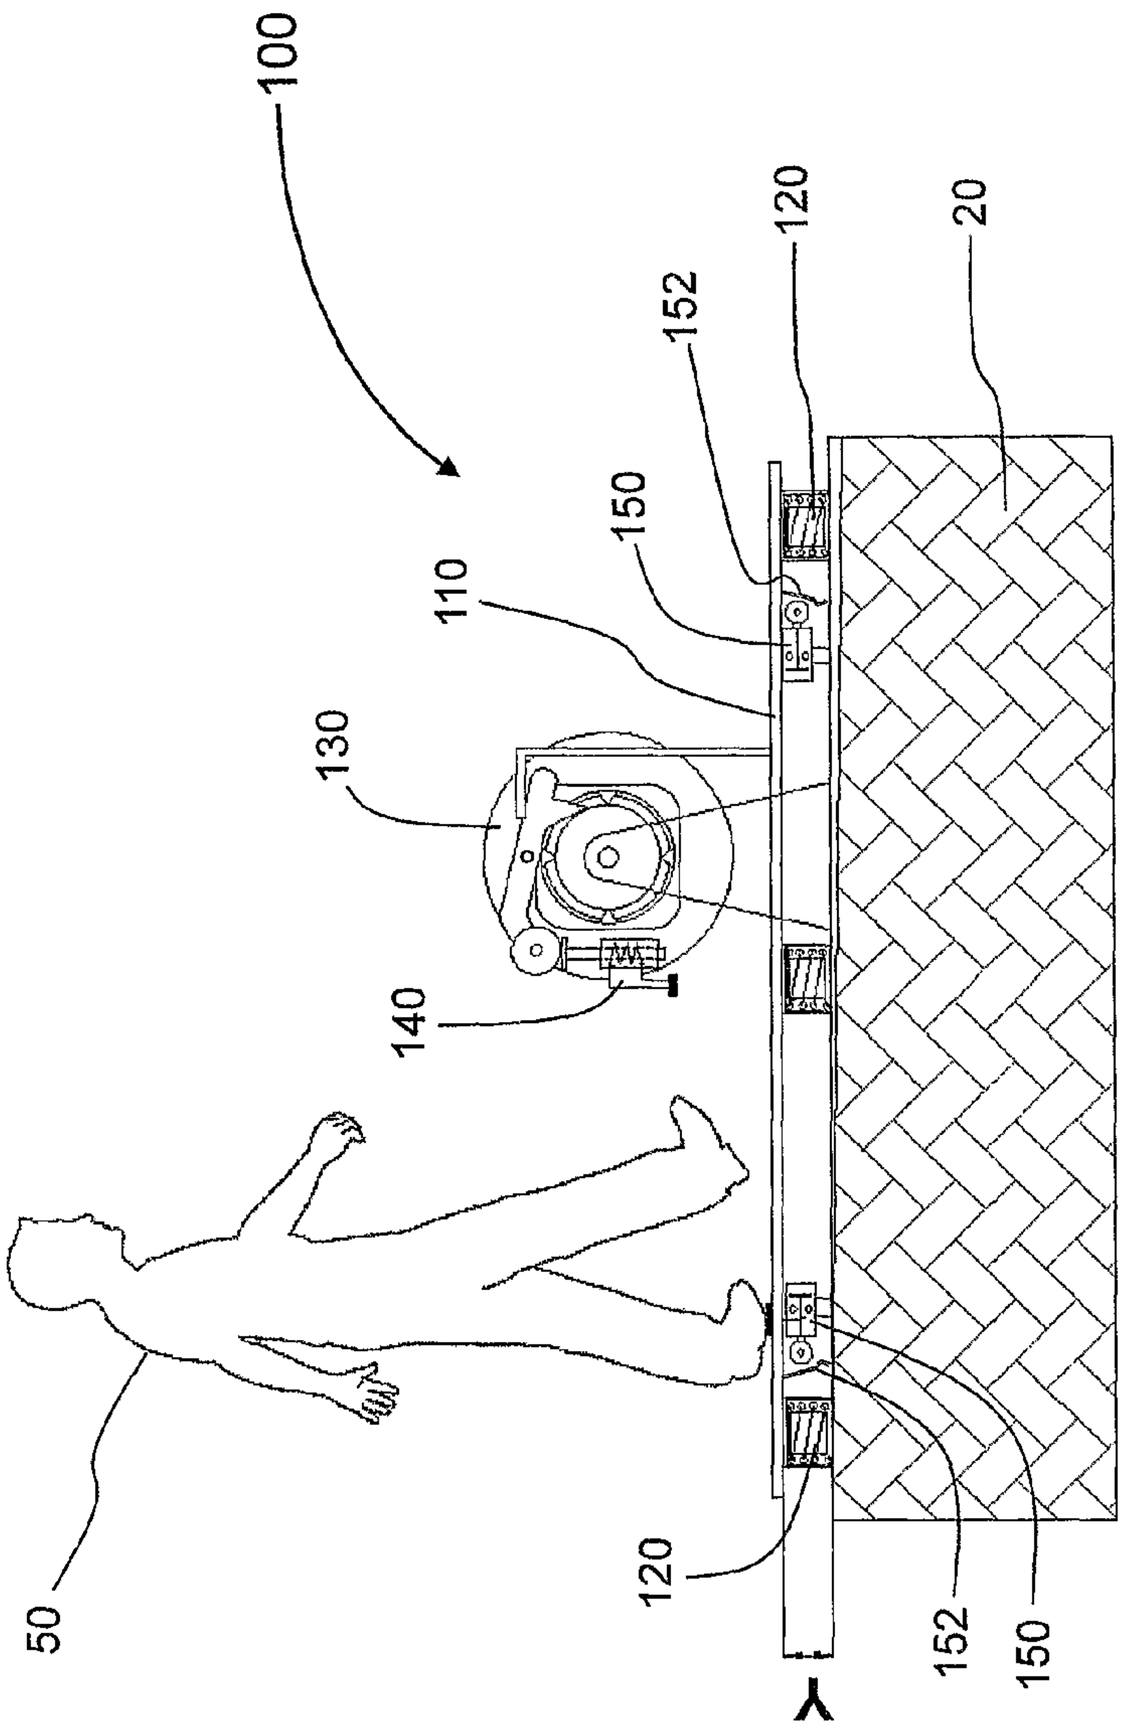

Fig 3

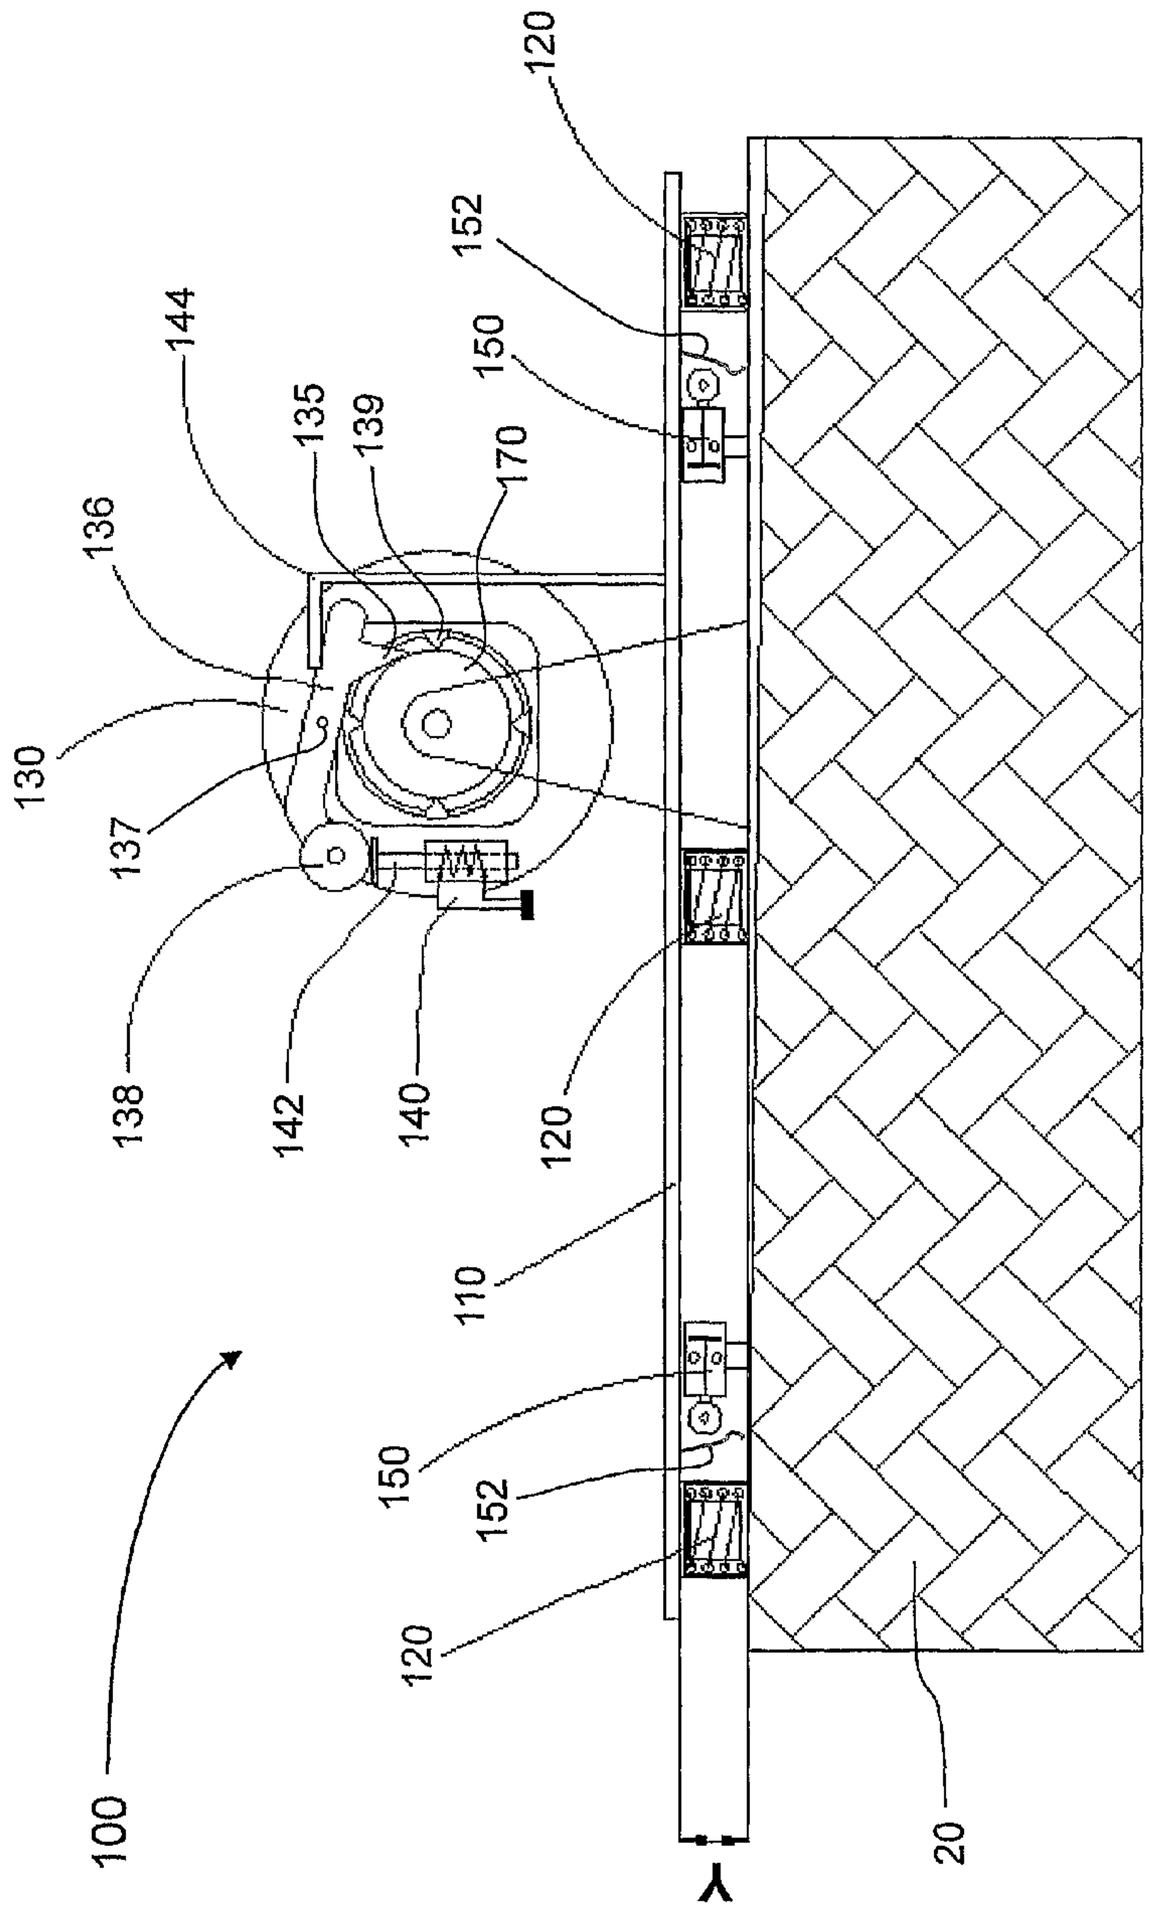
120
152
150
144
135
139
170
136
130
137
138
142
140
120
110
150
152
120
100
20

Fig 4

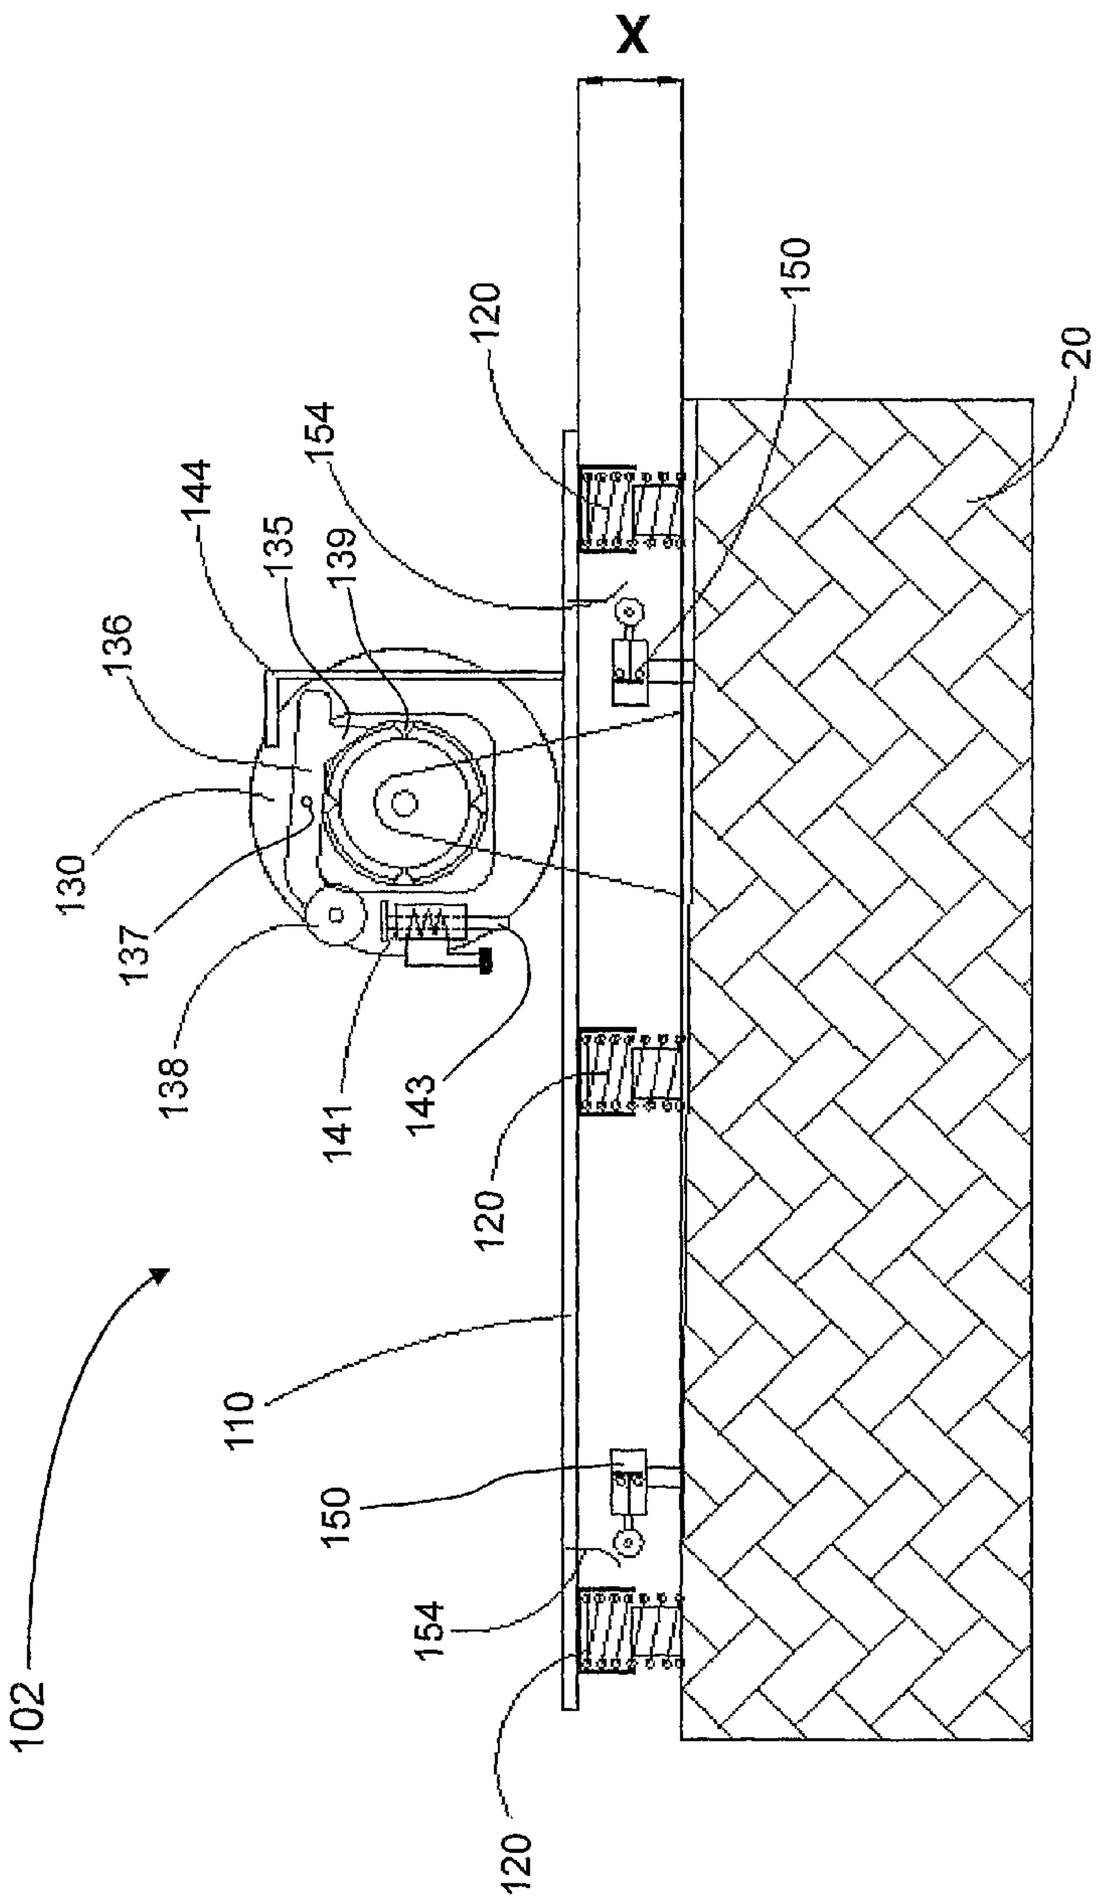

Fig 5

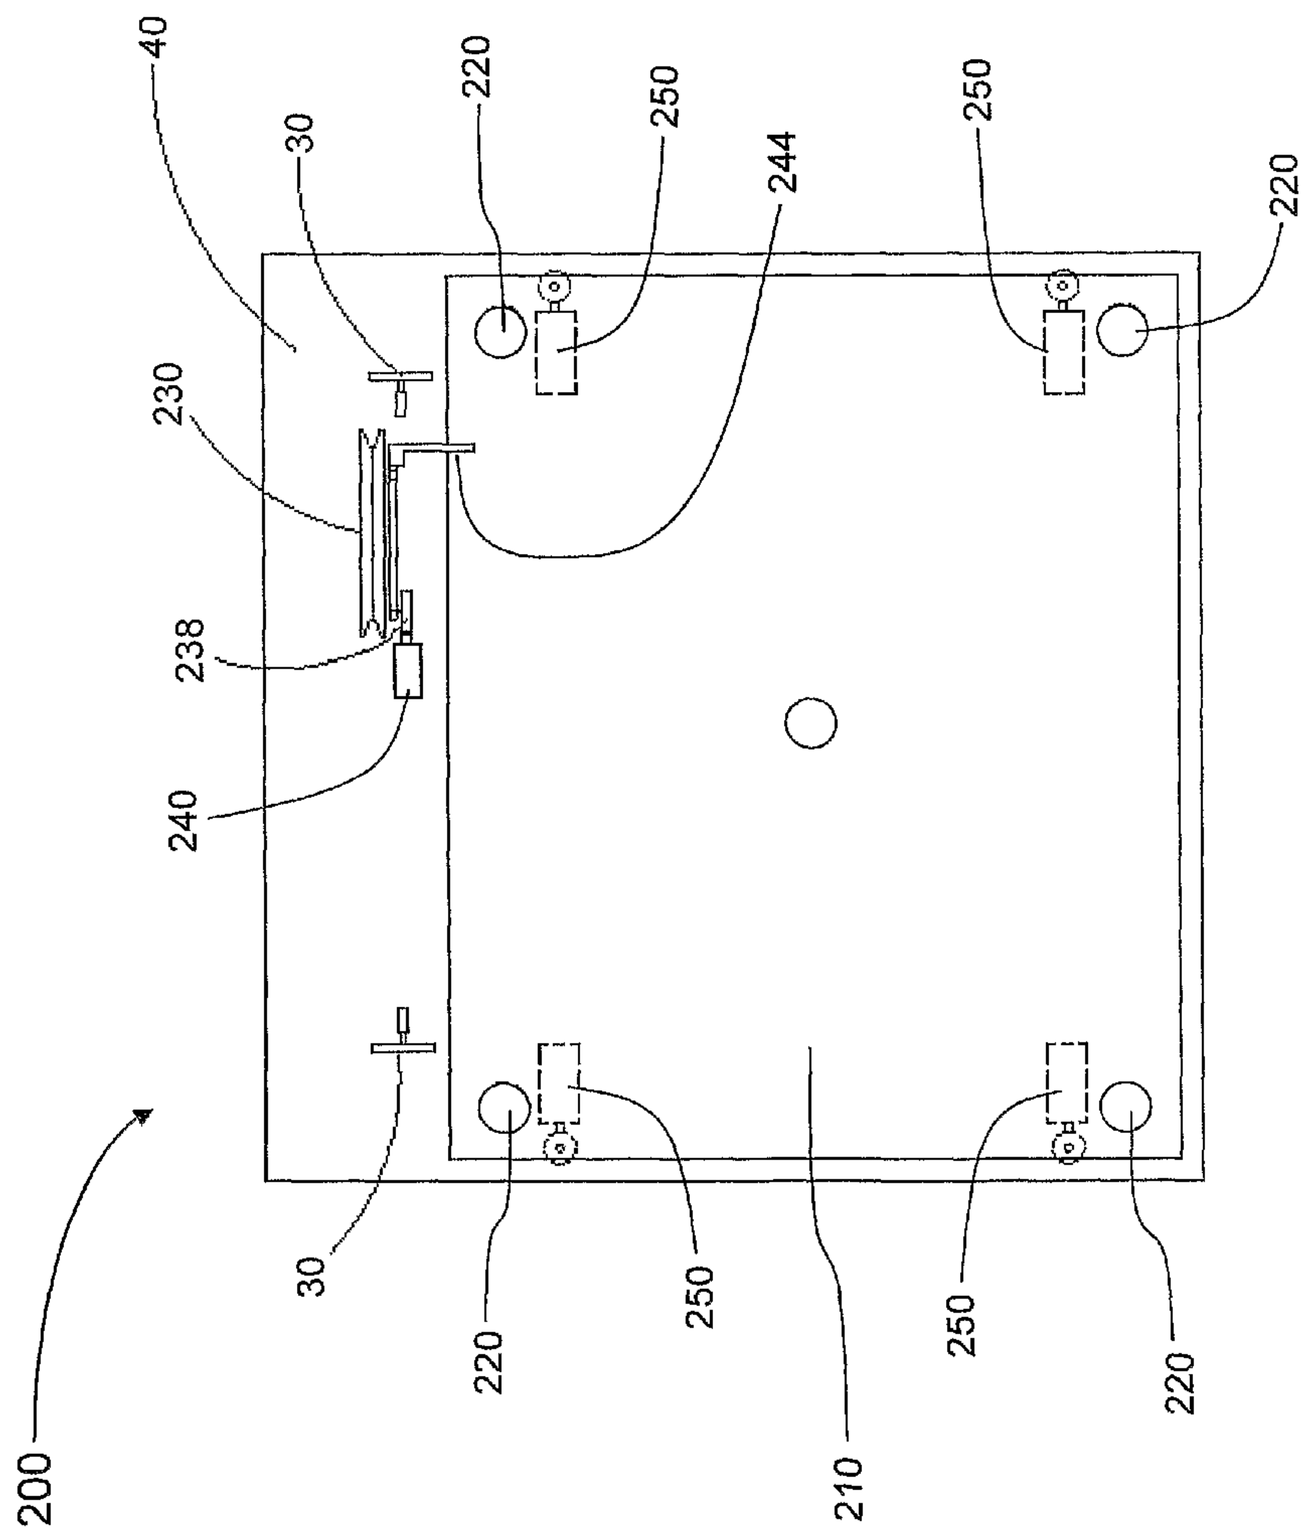

Fig 6

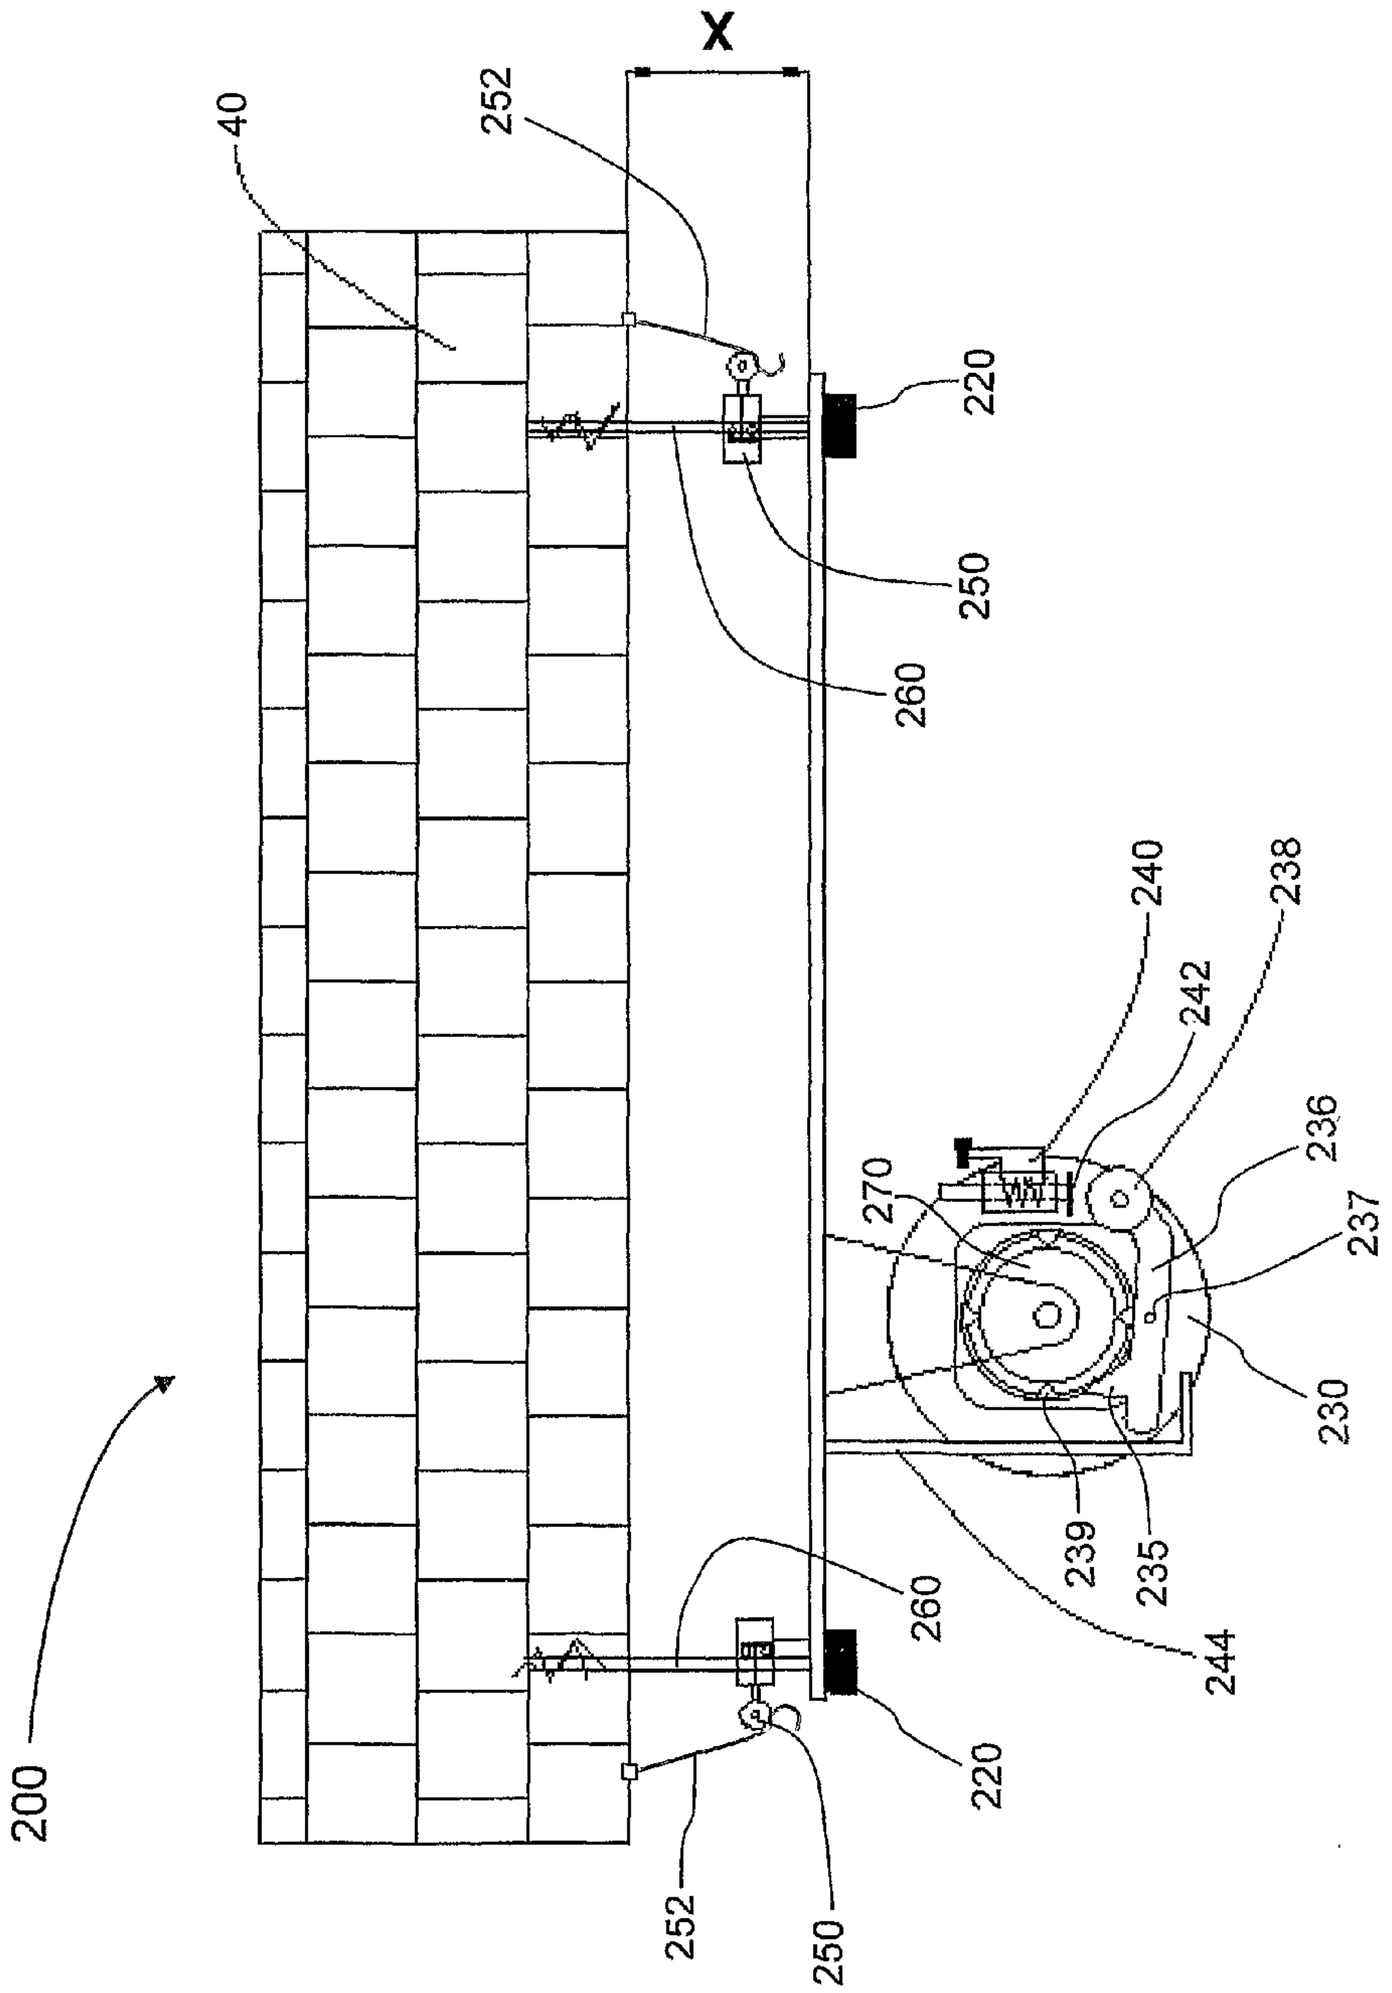
X
40
252
220
250
260
240
238
242
236
270
237
230
239
235
244
200
260
220
252
250

Fig 7

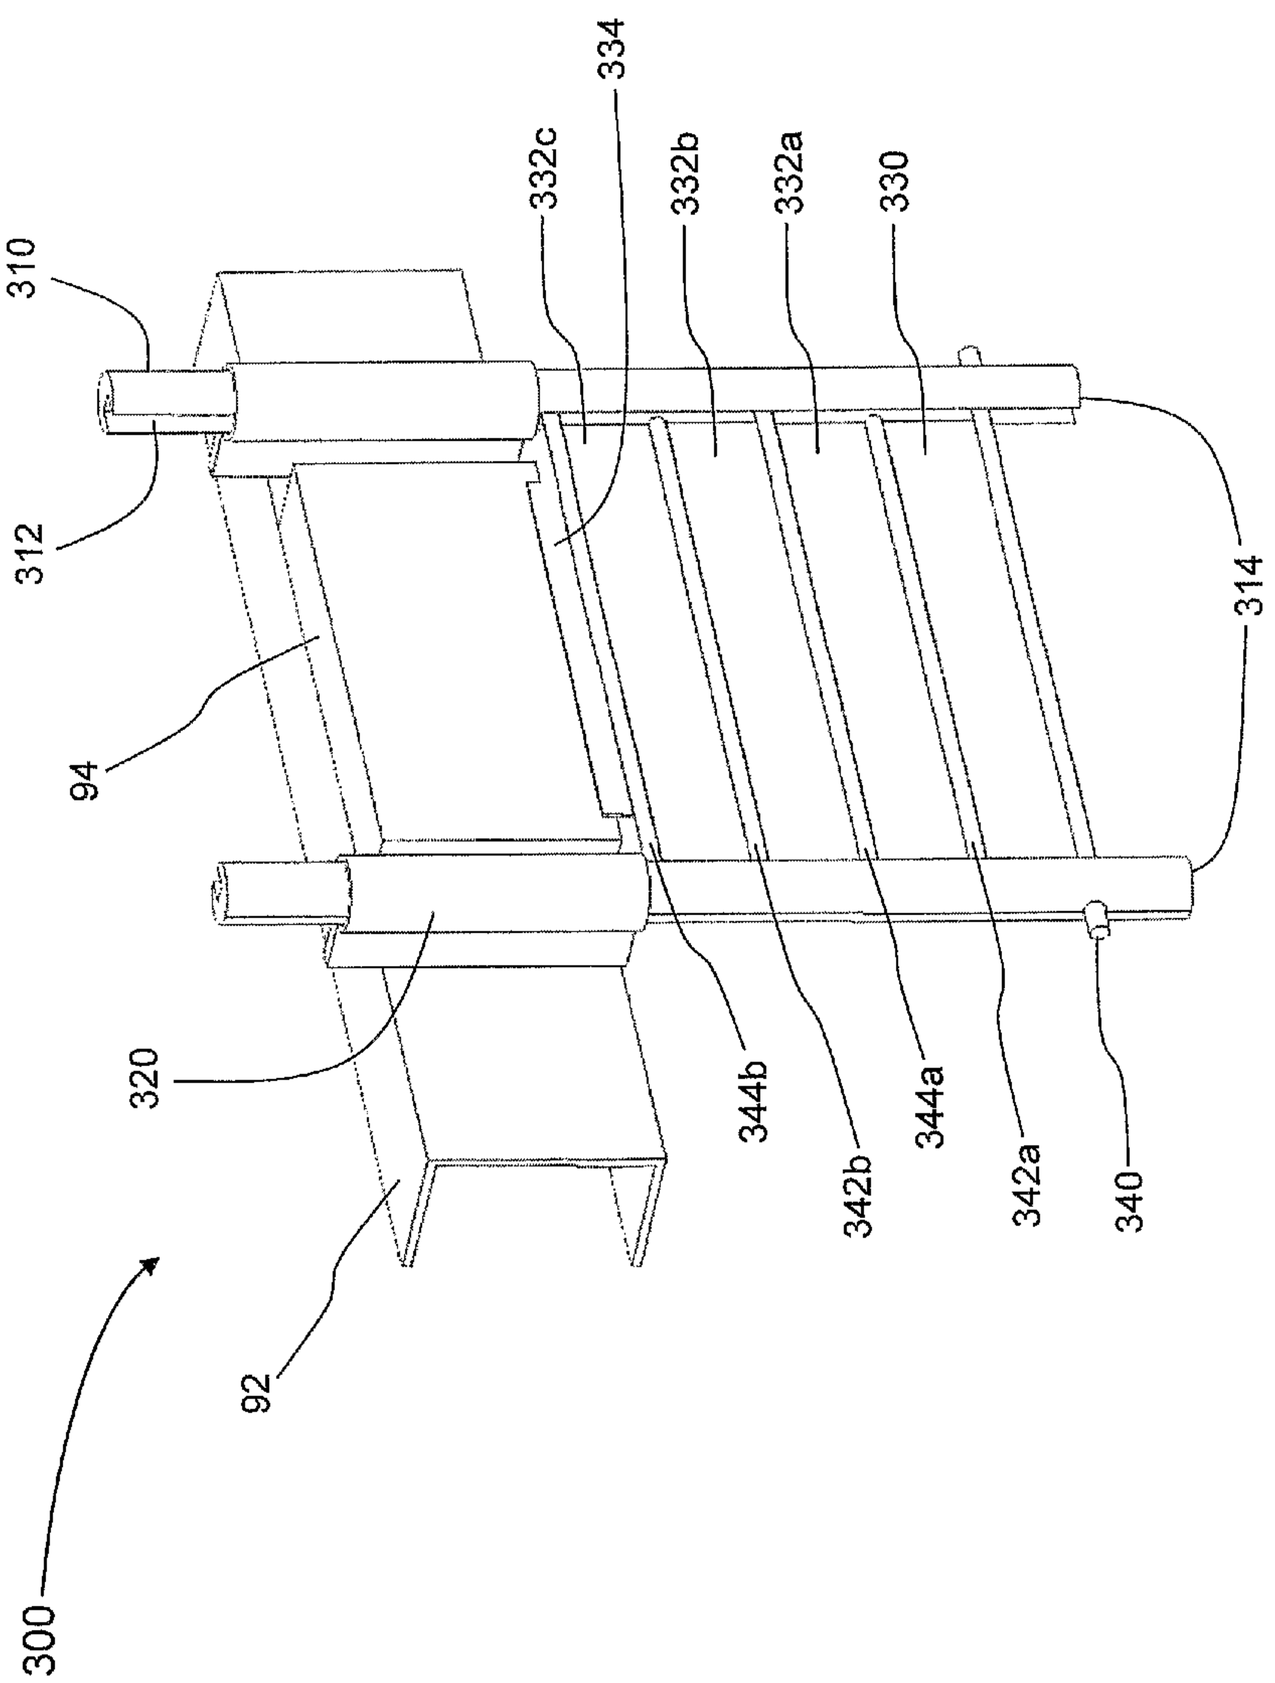
334
332c
332b
332a
330
310
312
314
94
320
344b
342b
344a
342a
340
92
300

Fig 8

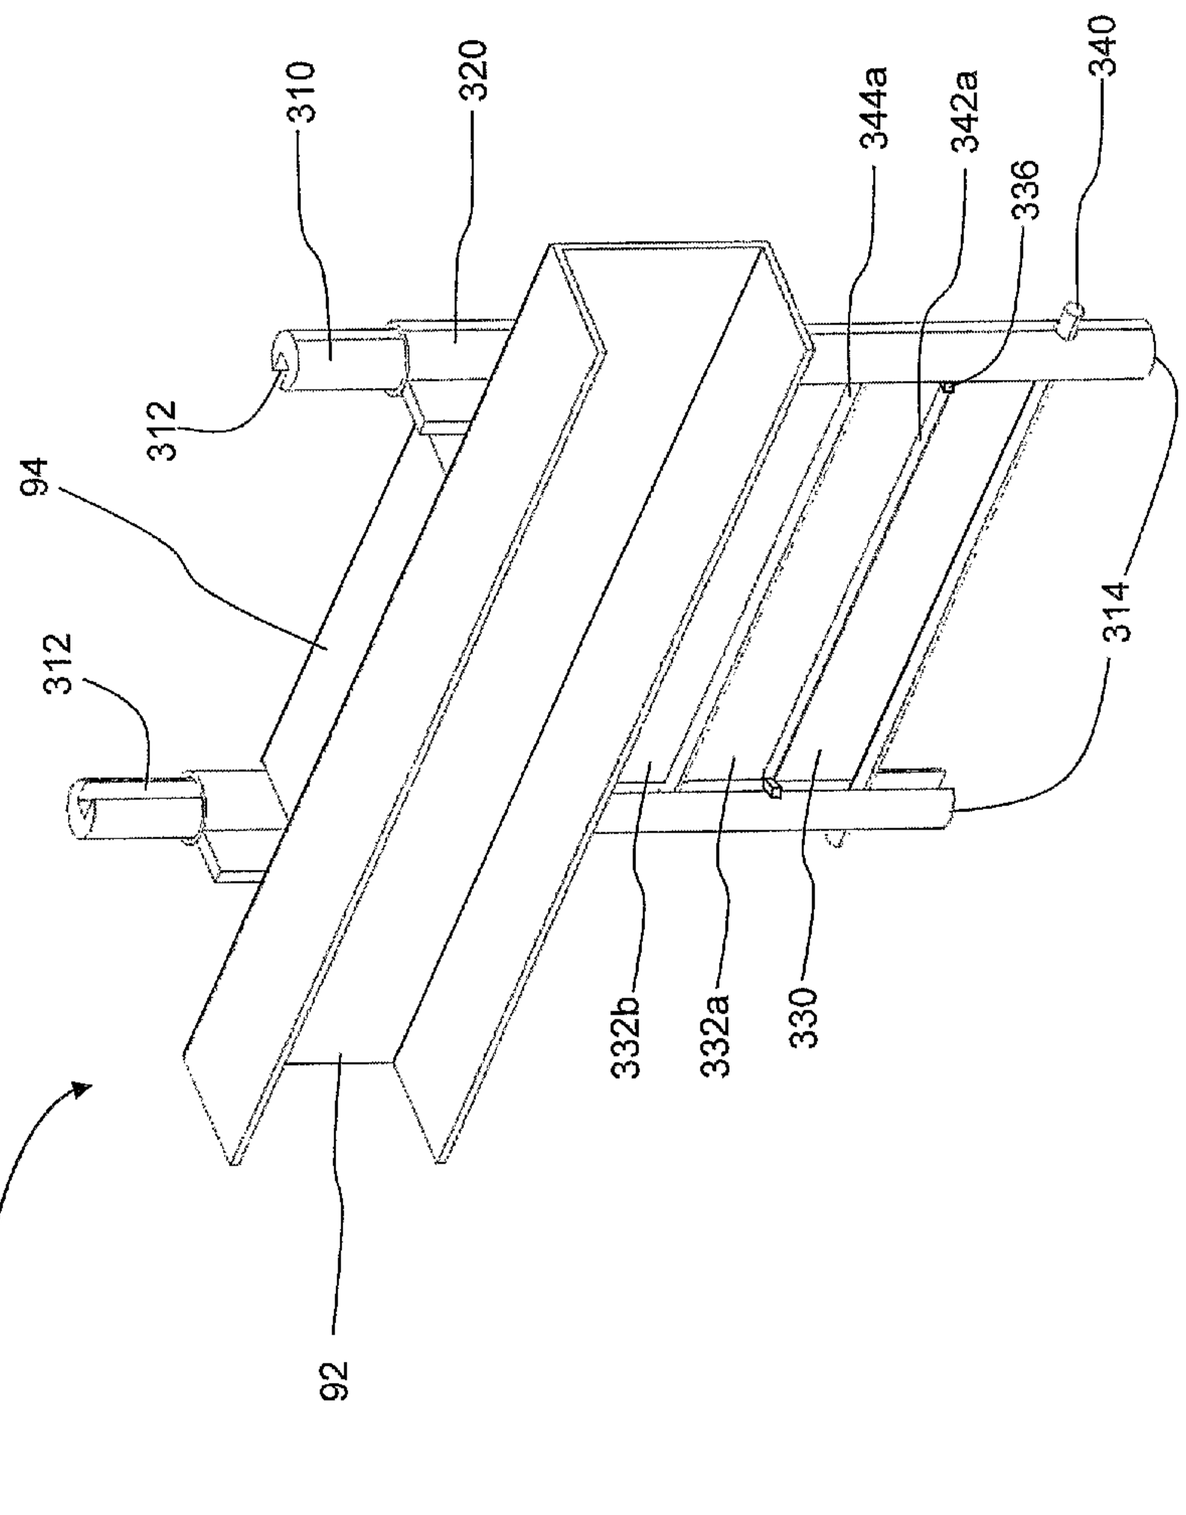

Fig 9

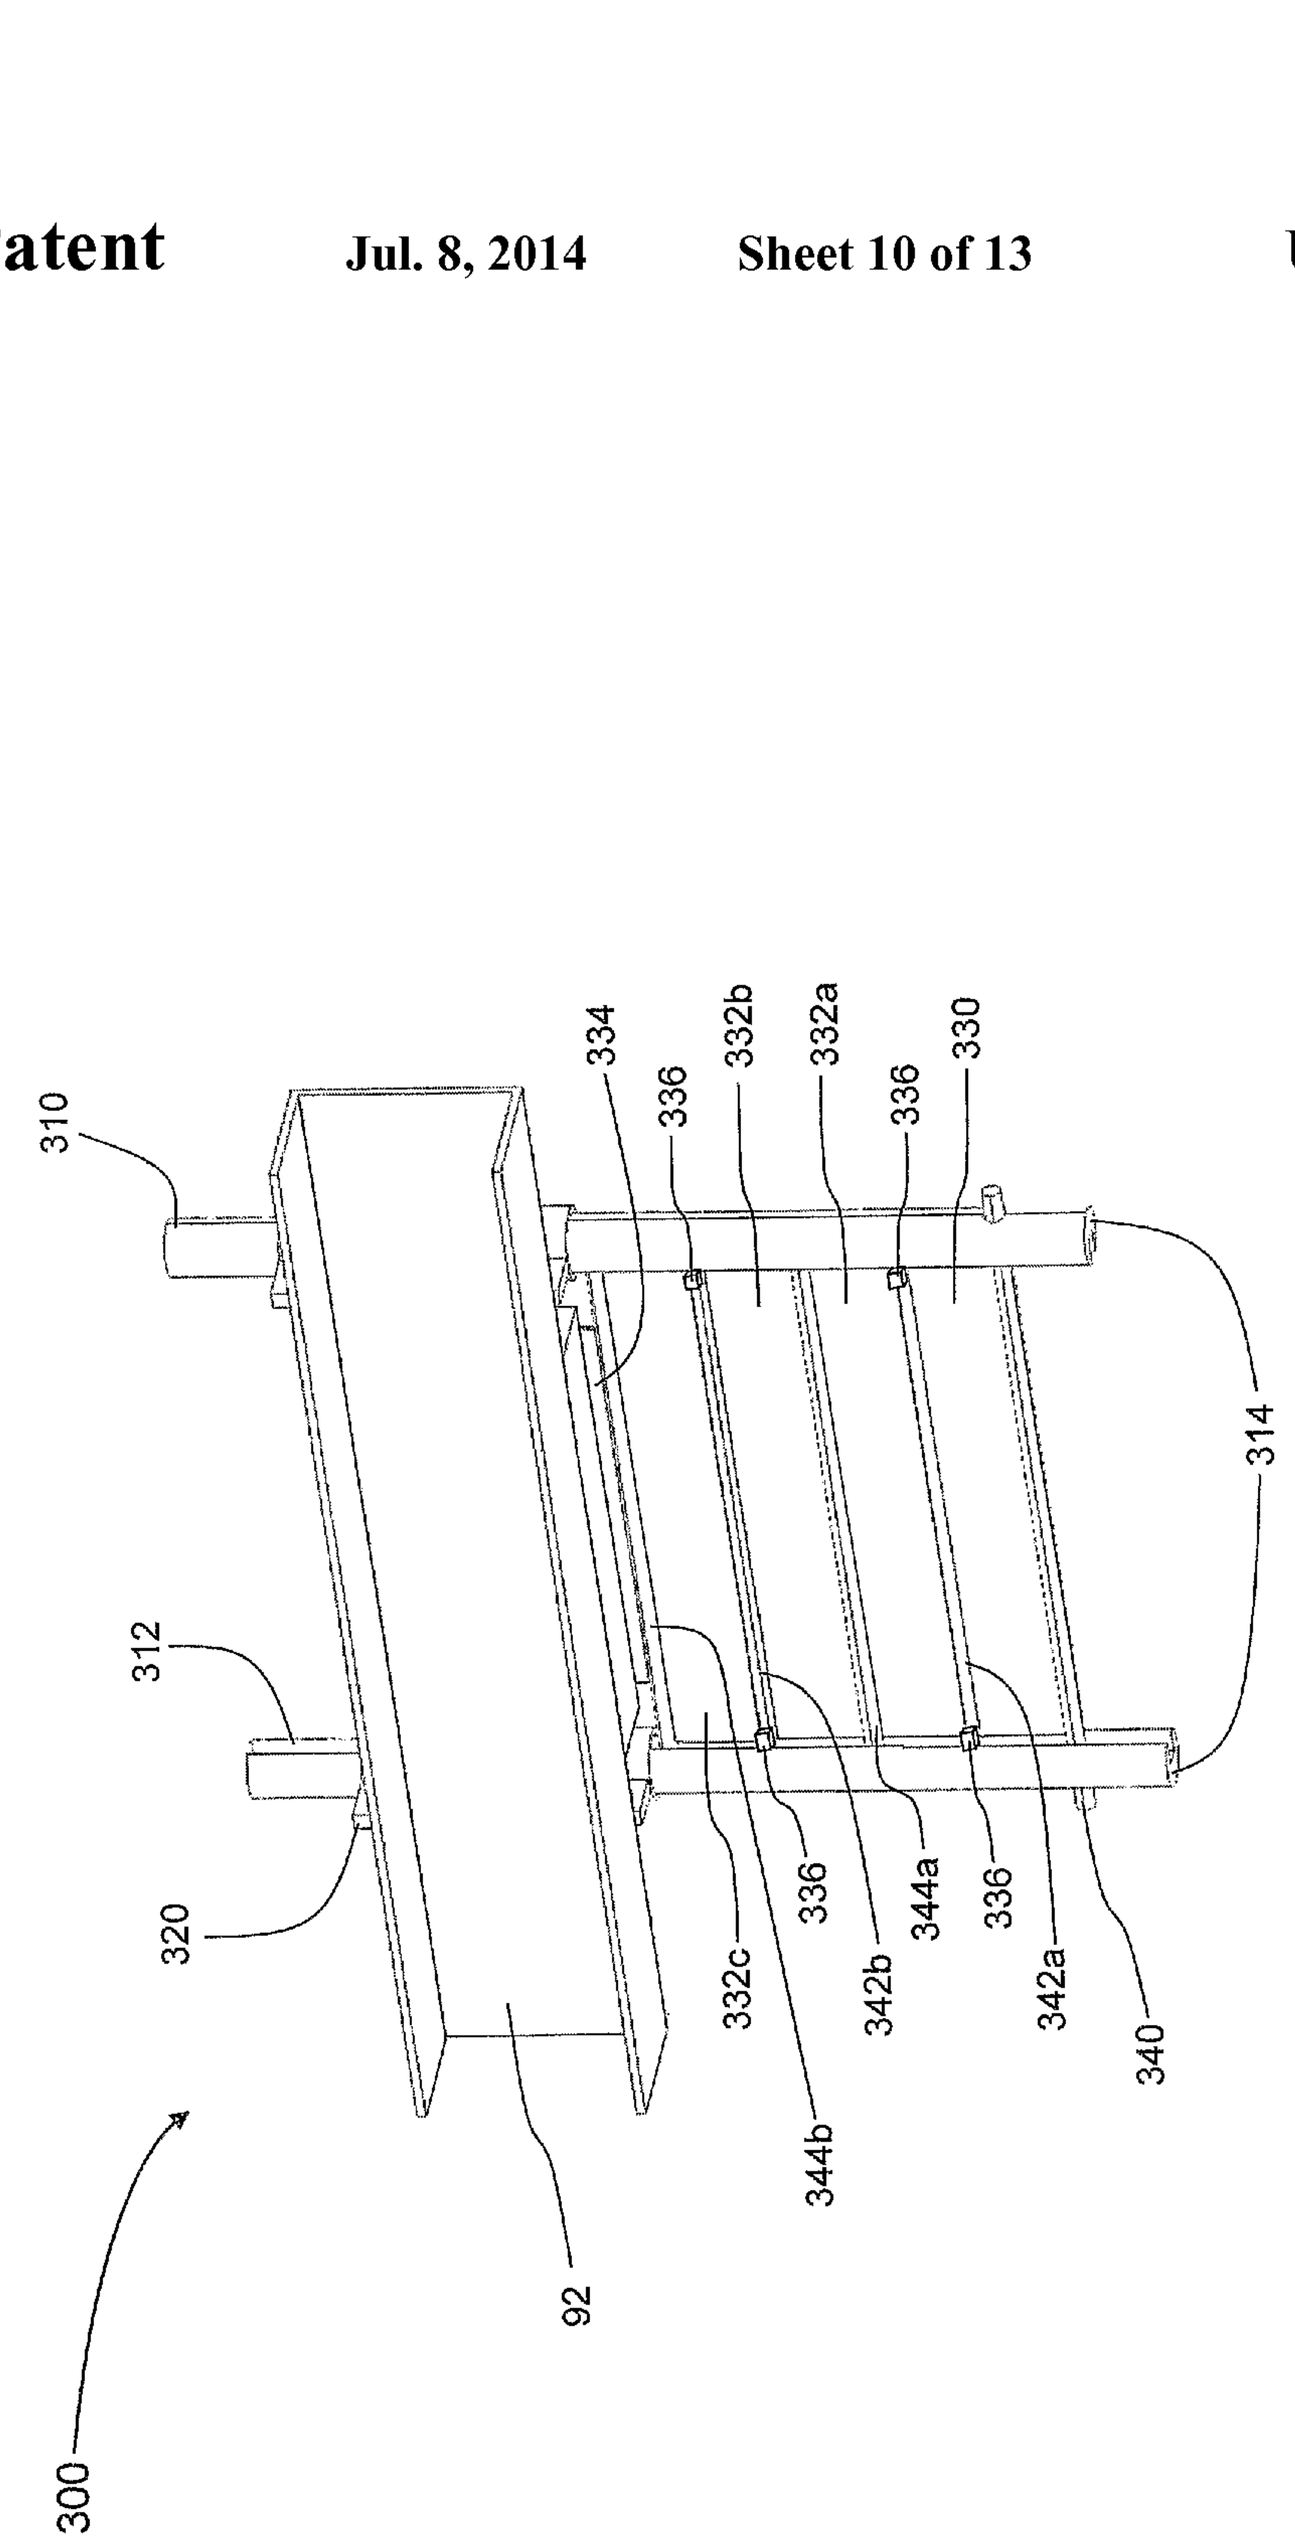
310
312
320
300
92
334
336
332b
332a
330
314
332c
344b
342b
344a
342a
340

Fig 10

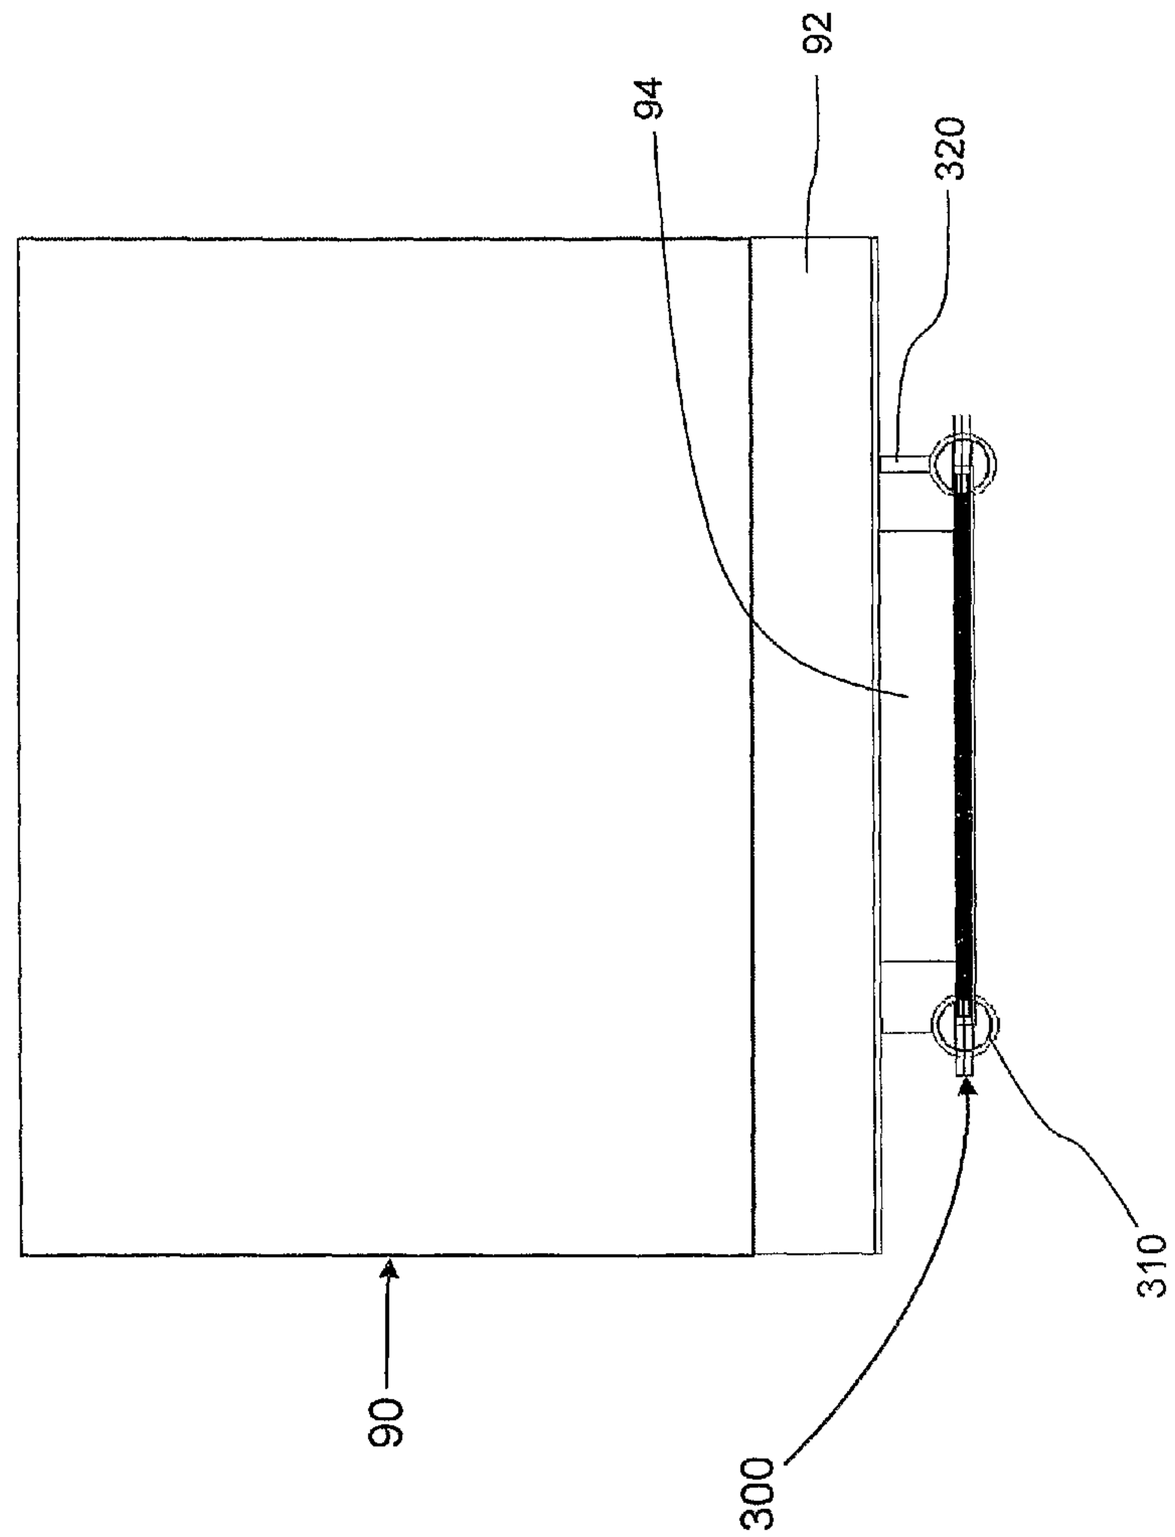

Fig 11



Fig 12b

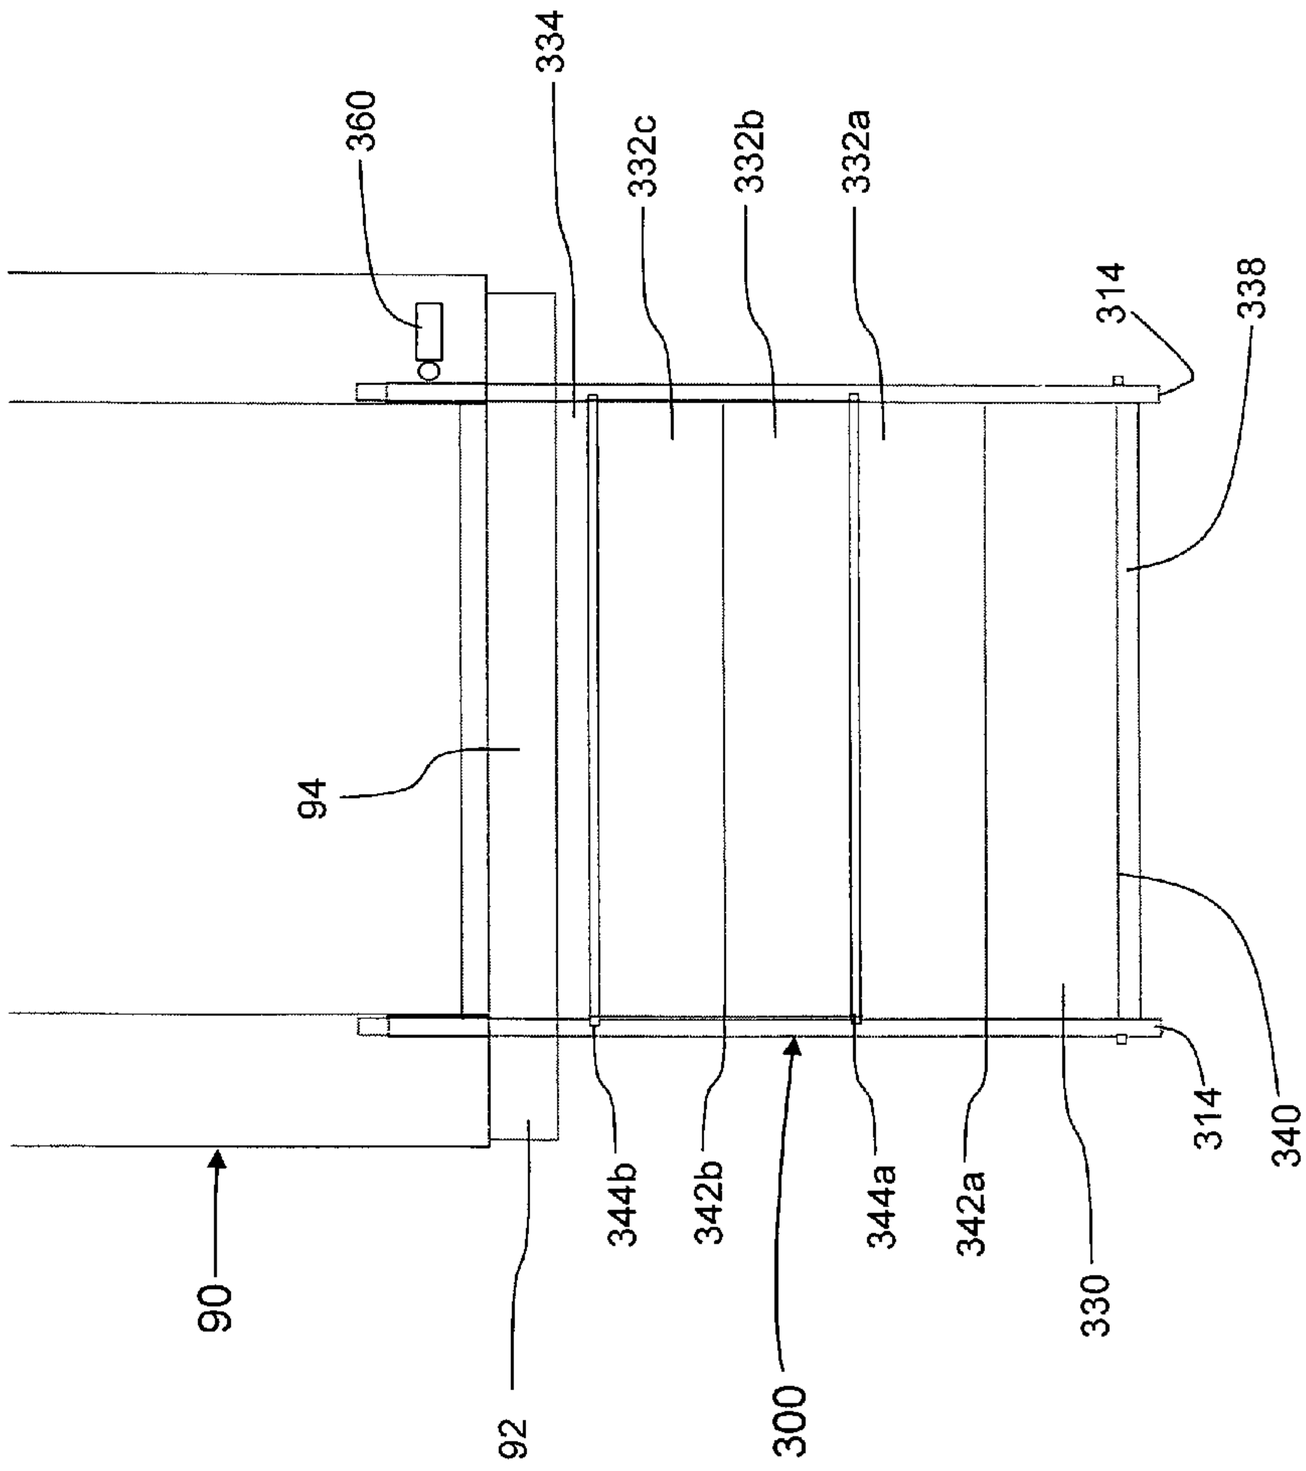

Fig 12a

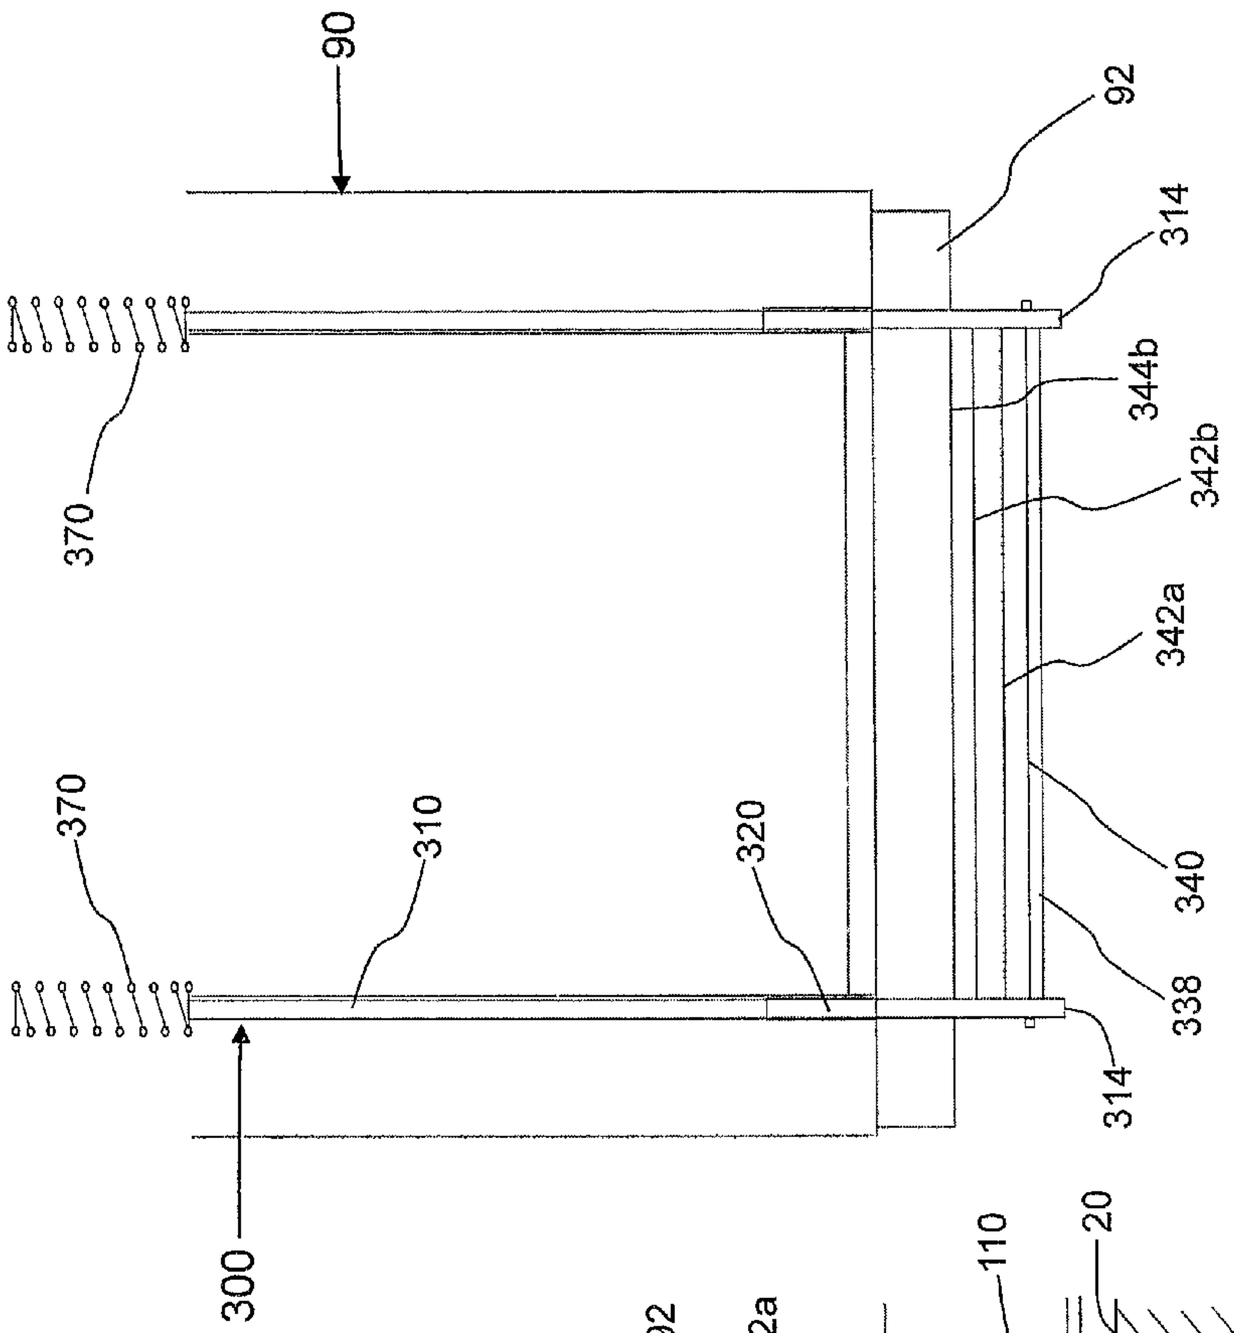

Fig 13b

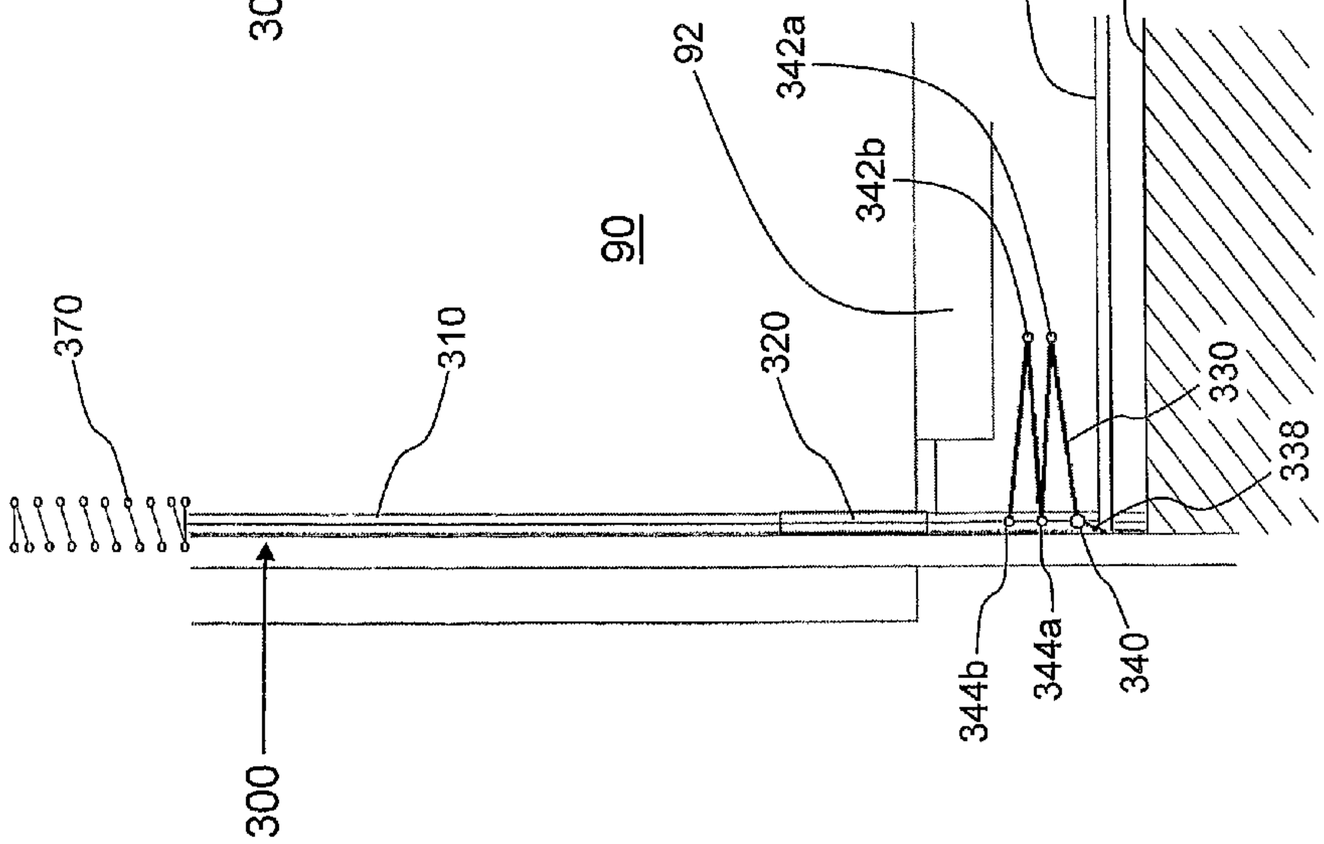

Fig 13a

SAFETY DEVICES FOR ELEVATORS WITH REDUCED CLEARANCES

RELATED APPLICATION

The present application claims the benefit of IL patent application 200878 filed on Sep. 13, 2009, IL patent application 201002 filed on Sep. 17, 2009 and IL patent application 201903 filed on Nov. 3, 2009, wherein the disclosure of all three aforementioned applications are incorporated herein by reference.

FIELD OF THE INVENTION

The present invention relates to elevators' safety mechanisms and more particularly, the present invention relates to safety assemblies for elevator pits with reduced safety clearance, as well as for elevator overheads with reduced safety clearance. This invention further relates to an elevator apron assembly for use in elevators having an elevator pit with a reduced safety clearance.

BACKGROUND OF THE INVENTION AND PRIOR ART

An elevator shaft is the space enclosed by fireproof walls and elevator doors for the travel of one or more elevators. An elevator shaft has the pit disposed at the bottom end of the shaft and terminates with an overhead disposed at the top end of the shaft.

There are safety requirement that must be followed, when installing an elevator, with regards to the pit and overhead clearances. In particular, when installing a new elevator, overhead and/or pit clearances are provided by rules EN 81-1 and EN 81-2 in Europe and ANSI A17 in the US. And this is as an important and not to be ignored point about safety, as difficult to solve from a technical point of view.

While it is possible (though unlikely) for an elevator's cable to snap, all elevators in the modern era have been fitted with several safety devices which prevent the elevator from simply free-falling and crashing. An elevator cab is typically borne by a set of hoist cables, each of which is capable on its own of supporting the full load of the elevator plus twenty-five percent more weight, with a minimum safety factor 12. In addition, there is a device, typically called the governor, which device detects whether the elevator car is descending or ascending faster than its maximum designated speed. Upon such detection, the governor activates an emergency safety gear, which is an integral part of the car frame, thereby stopping the elevator car quickly, but not so abruptly as to cause injury.

According to elevator law/standards, every passenger elevator must be equipped with a safety gear to prevent free fall of the car, which safety gear, when activated, activates a mechanical lock to lock up the car onto the elevator's guide rails. In order to properly activate the safety gear, every passenger elevator must be equipped with an over speed governor (OSG), which governor senses whenever the car speed exceeding its designated speed, the OSG activates the safety gear device. Such activation results with a mechanical lock up of the car to onto the elevator's guide rails.

It should be noted that in some cases, the OSG is being used as an anti creeping device, preventing the car from unintended movement ("creeping") in either direction. In such cases, the OSG is being electrically activated by means of a solenoid, and in order to allow normal use of the elevator, the anti creeping solenoid must be electrically energized. That is, whenever the car moves with a de-energized solenoid, the safety gear is automatically activated.

The required safety clearance, between the pit floor and the external bottom surface of the elevator's floor, is designed to prevent a crushing or squeezing of person and to enable a maintenance person, located at the pit, to survive a free fall or unintended movement of the elevator. That safety clearance is quite large and is often difficult to provide the required safety clearance, for example, in an existing building to which an elevator is to be added.

Therefore, there is a need for a safety mechanism for an elevator pit having a reduced safety clearance. Some safety mechanisms for an elevator pit with reduced safety clearance exist in the market. For example, European Patent EP 0725033 shows an elevator car blocking device, mounted in the pit, working directly on the bottom of the elevator car or on the counterweight, and suitable for creating a temporary working place at the pit or at the overhead, respectively. Although being functional and safe, the proposed mechanism is cumbersome, requiring a lot of space not always available in the pit for its double application, which would be quadruple in case of contemporary reduced pit and head, considering that traditional shock absorbers are already present in the pit. The reduced height requires the installation of a supporting pillar to obtain a height allowing a person entrapped to leave the pit and not only to take cover. Furthermore, the proposed mechanism is electrically complex, requiring a special harness to be combined with the elevator control board harness However, the proposed mechanism must be activated manually before entering the shaft and after exiting the shaft.

In another example, European Patent EP 1422182 provides a mechanism that activates the emergency safety gear of an elevator, having a reduced pit, when the distance between the bottom of the elevator car and the bottom of the pit decreases under a minimum safety value, wherein the operation of releasing and/or retracting said mechanism is made by a remote manual operation, performable from outside the elevator shaft. However, the proposed mechanism must be activated manually before entering the shaft and after exiting the shaft.

There is a need for and it would be advantageous to have a mechanism that activates the emergency safety gear of an elevator, whenever a person is in the pit of an elevator shaft or in the overhead of an elevator shaft.

A reduced pit also requires an apron that fit the height of the pit. In general, an apron (also called toe guard) is a safety device which is securely attached to an elevator car and forms a wall extending downwards from the elevator car, on the door side. Should the elevator car stop between floors, a gap is formed between the car and the landing floor, exposing the shaft. The apron is intended to cover the gap and thus prevent a person escaping from the car onto the landing floor, from falling through the gap into the shaft, as well as prevent any body part of a passenger from getting between the car and the landing floor. An apron suited for a reduced pit is in itself very advantageous as it facilitates a very low pit height.

There is therefore a need and it would be advantageous to have an apron that can fold when approaching the pit floor of an elevator shaft.

SUMMARY OF THE INVENTION

The device provided with the present invention is a safety mechanism for an elevator shaft having a pit with reduced safety clearance and/or an overhead with reduced safety clearance. The present invention further provides an elevator apron assembly for use in elevators having an elevator pit with

a reduced safety clearance, which apron can be operated with the safety device of the present invention.

A principal intention of the present invention is to provide a safety mechanism for an elevator pit and/or overhead having a reduced safety clearance, the safety mechanism including a movable plate and sensors for detecting motion of the moveable plate. Upon sensing motion of the moveable plate, a locking trigger mechanism activates the emergency safety gear of the elevator, protecting a person situated in the reduced safety clearance in the elevator shaft.

An aspect of the present invention is to adapt the safety mechanism to an elevator shaft having a pit with reduced safety clearance.

An aspect of the present invention is to adapt the safety mechanism to an elevator shaft having an overhead with reduced safety clearance.

In an elevator shaft having reduced ends and preferably an anti creeping device, the reduced ends being the elevator pit and the elevator overhead, a load sensing safety apparatus facilitated to activate the emergency safety gear of the elevator, according to teachings of the present invention, the load sensing safety apparatus including a movable plate, one or more spacing devices one or more pressure sensors, and a locking trigger mechanism for triggering the activation of the emergency safety gear of the elevator, preferably by activating the anti creeping device.

The spacing devices maintain the movable plate at a predesigned distance from the surface of the respective reduced end of the elevator shaft, the elevator being in idle state. The one or more pressure sensors are operatively connected to the movable plate, and when pressure is applied onto the movable plate towards the surface of the respective reduced end of the elevator shaft, the force of the pressure being over a predesigned threshold value, the movable plate moves towards the surface of the respective reduced end and the one or more pressure sensors sense the pressure, thereby activating the locking trigger mechanism. Upon termination of the pressure applied onto the movable plate, the movable plate returns to the distance from the surface of the respective reduced end, as in the idle state.

In preferred embodiments of the present invention, the safety apparatus is disposed at the elevator pit with reduced safety clearance. The spacing devices are biasing elements securely disposed on the floor of the elevator pit, and the movable plate is disposed on the one or more biasing elements. Preferably, the return of the movable plate is performed by the one or more biasing elements.

In preferred embodiments of the present invention, the safety apparatus is disposed at the elevator ceiling with reduced safety clearance. The spacing devices are holding rods securely attached to the elevator ceiling, wherein the holding rods include stoppers for holding the movable plate. Optionally, the holding rods are adjustable. Optionally, the return of the movable plate is performed by the gravity force.

Preferably, the locking trigger mechanism of the load sensing safety apparatus is a solenoid.

Optionally, the locking trigger mechanism is an arm having a first end and a second end, wherein the first end is securely attached to the movable plate, and wherein when the movable plate moves towards the surface of the reduced ends of the elevator shaft, the second end moves to operatively activate the emergency safety gear of the elevator.

Preferably, the load sensing safety apparatus further including an electronic control unit. The electronic control unit activates an alarm upon the sensing of the motion of the movable plate towards the surface of the respective reduced end.

An aspect of the present invention is to provide a foldable apron apparatus mounted onto a bottom portion of an elevator car, used in an elevator having a reduced pit. The foldable apron apparatus includes a pair of sliding rods having a bottom end and a top end, wherein the sliding rods are assembled substantially parallel and substantially vertical to the surface of the floor of the reduced pit, when the bottom end is adjacent to the surface of the floor. A leading groove is formed in each of the sliding rods such that both the leading grooves face each other.

The foldable apron apparatus further includes a pair of leading elements securely attached to the bottom portion of the elevator car, wherein each of the leading elements include an opening and wherein a respective sliding rod can fittingly slide through the opening in the leading element, an enclosing rib securely attached to the bottom portion of the elevator car, and a foldable arrangement of at least one pair of slats. Each of the pair of slats includes an upper slat and a lower slat, wherein the upper slat and the lower slat are pivotally interconnected by a laterally movable axis. The upper slat and the lower slat are pivotally connected to the lower slat of the adjacently above pair of slats by a slidable axis. The slidable axis is fittingly facilitated to slide inside the leading groove. The upper slat of the uppermost slat is pivotally attached to the enclosing rib by a slidable axis. The lower slat of the lowermost slat is pivotally attached to a bottom axis, wherein the bottom axis is securely attached to the sliding rods proximal to the bottom ends.

When the bottom portion of the elevator car is distal from the surface of the floor of the reduced pit, the foldable arrangement of at least one pair of slats is in unfolded state.

When the elevator car descends towards the floor of the reduced pit, the sliding rods make stationary contact with the floor of the reduced pit, the leading elements slide down on the respective sliding rods, thereby exerting downwardly force onto the enclosing rib and onto the slats pivotely disposed therebelow, resisting by the bottom axis, wherein the exerting downwardly force causes the slats to collapse, wherein the slidable axes slide down towards the bottom axis inside the leading grooves, and wherein laterally movable axis move laterally away from the sliding rods, thereby bringing foldable apron to a folded state.

When the elevator car ascends upwards from the floor of the reduced pit, the leading elements slide up on the respective sliding rods, pulling up the enclosing rib and the slats pivotely disposed therebelow, until the foldable apron returns to the unfolded state.

Optionally, the apron apparatus further includes biasing elements operatively coupled with the top ends of the sliding rods, wherein the biasing elements exerts downwardly force on the sliding rods thereby pushing the sliding rods downwardly, and thereby helping the gravity force to bring the foldable apron to the unfolded state.

Optionally, the apron apparatus further includes an electronic control unit. Upon detection of a malfunction of the foldable apron, the electronic control unit operatively activates the emergency safety gear of the elevator.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become fully understood from the detailed description given herein below and the accompanying drawings, which are given by way of illustration and example only and thus not limitative of the present invention, and wherein:

FIG. **1** is a top view schematic illustration of a load sensing floor apparatus for a reduced elevator pit, according to preferred embodiments of the present invention;

FIG. **2** is a side view schematic illustration of a load sensing floor apparatus for a reduced elevator pit, as shown in FIG. **1**, the elevator being in normal operation and stationary;

FIG. **3** is a side view schematic illustration of a load sensing floor apparatus for a reduced elevator pit, as shown in FIG. **1**, the elevator being in safe state, having a load disposed on top of the floor;

FIG. **4** is a side view schematic illustration of a load sensing floor apparatus for a reduced elevator pit, as shown in FIG. **1**, the elevator being in safe state;

FIG. **5** is a side view schematic illustration of a load sensing floor apparatus for a reduced elevator pit, according to variations of the present invention;

FIG. **6** is a bottom view schematic illustration of a pressure sensing ceiling apparatus for a reduced elevator overhead, according to embodiments of the present invention;

FIG. **7** is a side view schematic illustration of a pressure sensing ceiling apparatus for a reduced elevator overhead, as shown in FIG. **5**;

FIG. **8** is a front perspective view illustration of a foldable apron for a reduced elevator pit, according to embodiments of the present invention;

FIG. **9** is a top-back perspective view illustration of the foldable apron for a reduced elevator pit, as shown in FIG. **8**;

FIG. **10** is a bottom-back perspective view illustration of the foldable apron for a reduced elevator pit, as shown in FIG. **8**;

FIG. **11** is a top view illustration of the foldable apron for a reduced elevator pit, as shown in FIG. **8**, mounted onto the front of an elevator;

FIG. **12***a* is a front view illustration of the foldable apron for a reduced elevator pit, as shown in FIG. **8**, in an unfolded state;

FIG. **12***b* is a side view illustration of the bottom slat of the foldable apron shown in FIG. **12***a;*

FIG. **13***a* is a side view illustration of the foldable apron for a reduced elevator pit, as shown in FIG. **8**, in a folded state; and

FIG. **13***b* is a front view illustration of the foldable apron shown in FIG. **13***a*.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Before explaining embodiments of the invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of the components set forth in the host description or illustrated in the drawings.

Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art of the invention belongs. The methods and examples provided herein are illustrative only and not intended to be limiting.

Reference is now made to the drawings. FIG. **1** is a top view schematic illustration an example of a load sensing safety apparatus **100** for a reduced elevator pit, according to preferred embodiments of the present invention, wherein safety apparatus **100** is disposed on the floor **20** of the pit. Reference is also made to FIG. **2**, which is a side view schematic illustration of load sensing safety apparatus **100** for a reduced elevator pit, the elevator being in normal operation and stationary.

Load sensing safety apparatus **100** includes a movable plate **110**, used as a floating floor disposed on multiple biasing elements **120**, such as coil springs, but not limited to coil springs, wherein biasing elements **120** are disposed on floor **20** of the elevator pit. As long as no force is pressing downwardly on movable plate **110** against one or more biasing elements **120**, safety apparatus **100** is in idle state, in which the coupled elevator (not shown) is on normal operation.

Load sensing safety apparatus **100** further includes a locking trigger mechanism such as a solenoid **140** and/or an arm **144**, but not limited to solenoid **140** and/or arm **144**. Load sensing safety apparatus **100** further includes one or more load sensors **150** that sense downwardly pressing forces applied to movable plate **110** against the one or more biasing elements **120**, the force being over a predesigned threshold value.

Reference is also made to FIG. **3**, which is a side view schematic illustration of load sensing safety apparatus **100**, having a load **50** disposed on top of movable plate **110**, thereby bringing safety apparatus **100** to a safe state. Reference is also made to FIG. **4**, which is a side view schematic illustration of load sensing safety apparatus **100**, the elevator being in safe state. Upon sensing load **50**, the locking trigger mechanism is activated to operatively activate the emergency safety gear of the elevator, to protect a person located in the pit of the elevator shaft. Upon activating the locking trigger mechanism, and thereby activating the emergency safety gear of the elevator, the operational state of the elevator turns into a safe state.

In preferred embodiments of the present invention, the locking trigger mechanism is a solenoid **140**, operatively connected to an OSG wheel **130** of the elevator, the OSG being an anti creeping device. FIG. **2** illustrates load sensing safety apparatus **100** for a reduced elevator pit in idle state, having sensed no loads. In the idle state, all load sensors **150** make contact with a contact blade **152**, thereby closing an electrical circuit that keeps a plunger **142** of solenoid **140** contracted against some biasing element such as a spring or a piston (not shown), and thereby allowing the elevator to proceed with normal operation. In idle state, the distance of movable plate **110** from floor **20** is X. In the example shown in FIGS. **1-4**, plunger **142** is distal from an element **138**, for example a wheel, which wheel axis is securely attached to an arm **136**, which arm **136** position facilitates normal operation of the elevator. Arm **136** is operatively attached to OSG wheel **130**.

When a load is disposed on top of movable plate **110** and the distance of movable plate **110** from floor **20** is reduced to Y, where Y<Pre-determined threshold value, at least one load sensors **150** brakes the contact with the coupling flexible contact blade **152**, thereby opening the electrical circuit that keeps a plunger **142** of solenoid **140** operating. As a result, the biasing element pushes plunger **142** forward, thereby pivotely moving arm **136** to lock and thereby OSG wheel **130** from rotating. The locking of OSG wheel **130** causes an immediate activation of the emergency safety gear (typically locking the elevator car onto rails **30**), and bringing safety apparatus **100** to a safe state.

Optionally, load sensing safety apparatus **100** further includes an arm **144**, which arm **144** is securely attached to movable plate **110**. In normal elevator operation, arm **144** is distal from arm **136**, which arm **136** position facilitates normal operation of the elevator. When a load is disposed on top of movable plate **110** and the distance of movable plate **110** from floor **20** is reduced to Y, where Y<Pre-determined threshold value, arm **144**, that moves with movable plate **110** attached thereto, rigidly contacts arm **136**, thereby pivotally

moving arm **136** about axis **137** such that, for example, a tooth **135** of arm **136** moves to block a stopper **139**, securely attached to and protruding from a rotating pulley **170** of OSG wheel **130** and thereby operatively activating the emergency safety gear of the coupled elevator and bringing safety apparatus **100** to a safe state.

Reference is now made to FIG. **5**, which is a side view schematic illustration of load sensing safety apparatus **102**, according to variations of the present invention, safety apparatus **102** being in the idle state. In the idle state, all load sensors **150** are detached from flexible contact blade **154**, thereby keeping the electrical circuit closed and a plunger **143** of solenoid **141** distal from an element **138**, for example a wheel, which wheel axis is securely attached to an arm **136**, which arm **136** position facilitates normal operation of the elevator.

When a load is disposed on top of movable plate **110**, for example by a maintenance person **50**, and the distance of movable plate **110** from floor **20** is reduced to Y, where Y<Pre-determined threshold value, at least one load sensors **150** makes contact with the coupling flexible contact blade **154**, thereby braking the electrical circuit that moves plunger **143** forward while pivotally moving arm **136** about axis **137** such that, for example, a tooth **135** of arm **136** moves to block a stopper **139** securely attached to and protruding from rotating pulley **170** of OSG wheel **130** and thereby, operatively activating the emergency safety gear of the coupled elevator, and bringing safety apparatus **102** to a safe state.

It should be noted that when the load is taken off movable plate **110**, the load sensing safety apparatus (**100** and **102**) returns to idle state.

Preferably, the load sensing safety apparatus (**100** and **102**) include an electronic control unit. The electronic control unit controls the operation of various elements of sensing safety apparatus (**100** and **102**), including sensors **150**, solenoid (**140** and **141**) and optionally, failures detection unit. Upon detection of a malfunction in sensing safety apparatus (**100** and **102**), the electronic control unit may activate the emergency safety gear of the elevator. Optionally, the electronic control activates an alarm upon sensing of motion of movable plate **110** towards floor **20**.

Reference is now made to the drawings. FIG. **6** is a bottom view schematic illustration an example of a load sensing safety apparatus **200** for a reduced elevator overhead of an elevator shaft, according to embodiments of the present invention, wherein safety apparatus **200** is securely disposed adjacently to ceiling **40** of an elevator shaft. Reference is also made to FIG. **7**, which is a side view schematic illustration of load sensing safety apparatus **200** for a reduced elevator overhead of an elevator shaft, the elevator being in normal operation and stationary.

Load sensing safety apparatus **200** includes a movable plate **210**, used as a floating ceiling disposed on multiple stoppers **220**, wherein stoppers **220** are securely attached to ceiling **40** of the elevator shaft by coupling rods **260**. As long as no force is pressing upwardly on movable plate **210**, safety apparatus **200** is in idle state, in which the coupled elevator (not shown) is on normal operation. Optionally, stoppers **220** and or coupling rods **260** are adjustable, facilitation placing movable plate **210** at a desired distance from ceiling **40**.

Load sensing safety apparatus **200** further includes a locking trigger mechanism such as a solenoid **240** and/or an arm **244**, but not limited to solenoid **240** and/or arm **244**. Load sensing safety apparatus **200** further includes one or more load sensors **250** that sense upwardly pressing forces applied to movable plate **210**, the force being over a predesigned threshold value. Upon sensing an upwardly pressing force, the locking trigger mechanism is activated whereby the emergency safety gear of the elevator, to protect a person located in the elevator shaft, between the upper surface of the elevator roof and the ceiling of the elevator shaft.

In preferred embodiments of the present invention, the locking trigger mechanism is a solenoid **240**, operatively connected to a governor **230** of the elevator, governor **230** being an anti creeping device. FIG. **7** illustrates load sensing safety apparatus **200** for a reduced elevator overhead in idle state, in which state no upwardly pressing force is sensed. In the idle state, all load sensors **250** make contact with a flexible contact blade **252**, thereby closing an electrical circuit that keeps a plunger **242** of solenoid **240** contracted against some biasing element such as a spring or a piston (not shown), and thereby allowing the elevator to proceed with normal operation. In idle state, the distance of movable plate **210** from ceiling **40** is X. In the example shown in FIGS. **6-7**, plunger **242** is distal from an element **238**, for example a wheel, which wheel axis is securely attached to an arm **236**, which arm **236** position facilitates normal operation of the elevator. Arm **236** is operatively attached to governor **230**.

When an upwardly pressing force is applied to movable plate **210**, for example by a maintenance person **50**, and the distance of movable plate **210** from ceiling **40** is reduced to value bellow a pre-determined threshold value, at least one load sensors **250** brakes the contact with the coupling flexible contact blade **252**, thereby opening the electrical circuit that keeps a plunger **242** of solenoid **240** operating. As a result, the biasing element pushes plunger **242** forward while pivotally moving arm **236** about axis **237** such that, for example, a tooth **235** of arm **236** moves to block a stopper **239** securely attached to protrude from a rotating pulley **270** of governor **230** and thereby operatively activating the emergency safety gear of the coupled elevator (typically locking the elevator to rails **30**), and bringing safety apparatus **200** to a safe state.

Optionally, load sensing safety apparatus **200** further includes an arm **244**, which arm **244** is securely attached to movable plate **210**. In normal elevator operation, arm **244** is distal from arm **236**, which arm **236** position facilitates normal operation of the elevator. When an upwardly pressing force is applied to movable plate **210** and the distance of movable plate **210** from ceiling **40** is reduced to value bellow a pre-determined threshold value, arm **244**, that moves with movable plate **210** attached thereto, rigidly contacts arm **236**, thereby pivotally moving arm **236** about axis **237** such that, for example, a tooth **235** of arm **236** moves to block a stopper **239** securely attached to protrude from a rotating pulley **270** of governor **230** and thereby operatively activating the emergency safety gear of the coupled elevator and bringing safety apparatus **200** to a safe state.

It should be noted that when the upwardly pressing force applied to movable plate **210** is terminated, load sensing safety apparatus **200** returns to idle state by the gravity force. Preferably, in a transition from safe state to idle state, activated by load sensing safety apparatus **200**, elevator will firstly move downwardly.

Preferably, the load sensing safety apparatus **200** include an electronic control. The electronic control unit controls the operation of various elements of sensing safety apparatus **200**, including sensors **250**, solenoid **240** and optionally, failures detection unit. Upon detection of a malfunction in sensing safety apparatus **200**, the electronic control unit may activate the emergency safety gear of the elevator. Optionally, the electronic control activates an alarm upon sensing of motion of movable plate **210** towards ceiling **40**.

Reference is now made to the drawings. FIG. **8** is a front perspective view illustration of a foldable apron **300** for a

reduced elevator pit, according to embodiments of the present invention. Reference is also made to FIG. **9**, which is a top-back perspective view illustration of foldable apron **300**, to FIG. **10**, which is a bottom-back perspective view illustration of foldable apron **300**, and to FIG. **11**, which is a top view illustration of foldable apron **300**, mounted onto the front of an elevator car **90**.

Foldable apron **300** includes a pair of sliding rods **310** and respective leading elements **320**, which leading elements **320** are securely attached to an entrance floor portion **94** of a bottom portion **92** of elevator car **90**.

When assembled, the two sliding rods **310** are substantially parallel and substantially vertical to the surface of floor **20** of the pit (assuming that the line of motion of elevator car **90** is substantially vertical). An opening is formed along leading elements **320** such that a respective sliding rod **310** is fittingly disposed inside the opening, wherein a leading element **320** can operatively move up and down along the respective sliding rod **310**. A linear leading groove **312** is formed along in at least the lower portion of sliding rods **310**, such that both leading grooves **312** face each other.

Foldable apron **300** further includes a pair of slats, a bottom slat **330** and an upper slat **332***a*. Optionally, foldable apron **300** further includes one or more pairs of slats **332**. In the example shown in FIGS. **8-13**, with no limitation, foldable apron **300** includes one more pairs of slats **332**, bringing the total number of slats to four. Rectangularly shaped slats **330** and **332** have substantially the same width, which width is substantially the distance between sliding rods **310**, or slightly smaller. For the sake of clarity, foldable apron **300** may includes any number of pairs of slats **332**, as required.

Reference is also made to FIG. **12***a*, which is a front view illustration of the foldable apron **300**, foldable apron **300** being in an unfolded state, to FIG. **13***a*, which is a side view illustration of the foldable apron **300**, foldable apron **300** being in a folded state, and to FIG. **13***b*, which is a front view illustration of the foldable apron **300**, foldable apron **300** being in a folded state. Bottom slat **330** is pivotally attached to a bottom axis **340**, wherein bottom axis **340** is securely attached to sliding rods **310**, proximal to the bottom ends **314** of sliding rods **310**. Reference is also made to FIG. **12***b*, which is a side view illustration of a variation of bottom slat **330**. In the variation shown in FIG. **12***b*, bottom slat **330** includes an extension **338** is required by the international standards), disposed on the bottom edge of slat **330** and which extension **338** extends outwardly forming an angle α with respect to the external surface of bottom slat **330**, wherein α is typically an obtuse angle.

The uppermost slat **332** (slat **332***c* in the example shown in FIGS. **8-13**) is pivotally attached to a fixed enclosing rib **334**, which rib **334** extends from one sliding rod (**310**) to the other sliding rod (**310**). Rib **334** encloses the gap formed between the upper edge of uppermost slat **332** and entrance floor portion **94**. Typically, slats **330** and **332** have substantially the same height, such that when foldable apron **300** is in an unfolded state, bottom slat **330** and slats **332** substantially enclose the gap between sliding rods **310**, to the frill height from the bottom edge of bottom slat **330** up to and including rib **334**.

Each upper slat **332** of each pair of slats, including slat **332***a*, is pivotally connected to the lower **332** of the adjacently above pair of slats **332**, by a slidable axis **344**. The length of each slidable axis **344** is fitted to slide inside grooves **312** of sliding rods **310**. The slats of each pair of slats, including slats **330** and **332***a*, are pivotally interconnected by a laterally movable axis **342**. Laterally movable axis **342** can operatively move laterally inwardly and back, with respect to the plane formed by sliding rods **310** and with respect to the elevator.

When elevator car **90** is in operation in a shaft having reduced pit and distally from the floor of the pit, foldable apron **300** is in an unfolded state. Should the elevator stop in an elevation above the landing floor level, foldable apron **300** prevents a person escaping from the elevator car onto the landing floor, from falling through the gap into the shaft, as well as prevent any body part of a passenger from getting between the elevator car and the landing floor.

When elevator car **90** descends towards the lowest landing floor level, before reaching the lowest landing floor level, bottom ends **314** of sliding rods **310** reach and make contact with floor **20** of the pit. As elevator car **90** continuous to descends, leading elements **320** slide down on respective sliding rods **310**, thereby exerting downwardly force onto rib **334** and onto uppermost slat **332** and onto the rest of the slats, resisted by axis **340** of bottom slat **330**. The exerting downwardly force causes slats **330** and **332** to collapse, wherein slidable axes **344** slide down towards axis **340** inside grooves **312** of sliding rods **310**, and laterally movable axis **342** move laterally inwardly, with respect to the plane formed by sliding rods **310** and with respect to elevator car **90**. The faces of slats **330** and **332** move closer to each other, and slidable axes **344** slide down move closer to axis **340**, limited only by the width of the slats. When elevator car **90** reaches the lowest landing floor level, elevator car **90** stops, foldable apron **300** being in the folded state.

Optionally, foldable apron **300** further includes spacers **336** (see FIG. **10**) externally disposed on ribs **310**, such that spacers **336** do not disturb the slidability of slidable axes **344** and such that spacers **336** keep each pair of slats slightly folded, including in folded state.

When elevator car **90** ascends from the lowest landing floor level, leading elements **320** slide up on the respective sliding rods **310**, which sliding rods **310** remain stationary in position due to the force of gravity. As leading elements **320** slide upwardly rib **334** pulls up uppermost slat **332** and the rest of the slats, until slats **330** and **332** return to the unfolded state. Optionally, foldable apron **300** further includes biasing elements **370**, such as coil springs, but not limited to coil springs, wherein biasing elements **370** are disposed on top of sliding rods **310**. When elevator car **90** descends towards the lowest landing floor level and bottom ends **314** of sliding rods **310** make contact with floor **20** of the pit, biasing elements **370** are loaded. When elevator car **90** ascends from the lowest landing floor level, loaded biasing elements **370** push sliding rods **310** downwardly, thereby helping foldable apron **300** to return to the unfolded state. In variations of the present invention including the extension **338**, extension **338** further improve the unfolding of slats **330** and **332**

In variations of the present invention, load sensing safety apparatus **100** further includes openings **318** (see FIG. **1**) formed in movable plate **110**, thereby allowing the bottom portion of sliding rods **310** to move trough respective openings **318**, facilitating normal operation of foldable apron **300** without activating load sensing safety apparatus **100**.

In variations of the present invention, foldable apron **300** is controlled by a controlled unit. If a sensor **360**, operatively connected to the control unit, does not sense that foldable apron **300** is in an unfolded state, the control unit takes safety measure actions such as activating the governor, thereby stopping the elevator quickly, but not so abruptly as to cause injury.

The invention being thus described in terms of embodiments and examples, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as

a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the claims.

What is claimed is:

1. In an elevator including an elevator shaft, the elevator shaft having reduced ends, the reduced ends being an elevator pit and an elevator overhead, a load sensing safety apparatus facilitated to activate emergency safety gear of the elevator, the load sensing safety apparatus comprising:

a) a movable plate;

b) one or more spacing devices;

c) one or more pressure sensors; and

d) a locking trigger mechanism for triggering said activation of the emergency safety gear of the elevator,

wherein said spacing devices maintain said movable plate at a predesigned distance from a surface of the respective reduced end of said elevator shaft, the elevator being in idle state;

wherein said one or more pressure sensors are operatively connected to said movable plate;

wherein when pressure is applied onto said movable plate towards said surface of said respective reduced end of said elevator shaft, the force of said pressure being over a predesigned threshold value, said movable plate moves towards said surface of said respective reduced end and said one or more pressure sensors sense said pressure, thereby activating said locking trigger mechanism; and

wherein said locking trigger mechanism is an arm having a first end and a second end, wherein said first end is securely attached to said movable plate, and wherein when said movable plate moves towards said surface of said reduced ends of said elevator shaft, said second end moves to operatively activate the emergency safety gear of the elevator.

2. The safety apparatus as in claim **1**, wherein the elevator includes an anti creeping device and wherein said locking trigger mechanism is facilitated to activate the anti creeping device in order to activate the emergency safety gear of the elevator.

3. The safety apparatus as in claim **1**, wherein upon termination of said pressure applied onto said movable plate, said movable plate returns to said distance from said surface of said respective reduced end, as in said idle state.

4. The safety apparatus as in claim **3**, wherein said return of said movable plate is performed by said one or more biasing elements.

5. The safety apparatus as in claim **3**, wherein said return of said movable plate is performed by the gravity force.

6. The safety apparatus as in claim **1**, wherein said safety apparatus is disposed at said elevator pit.

7. The safety apparatus as in claim **6**, wherein said spacing devices are biasing elements securely disposed on the floor of said elevator pit, and wherein said movable plate is disposed on said one or more biasing elements.

8. The safety apparatus as in claim **6**, wherein said return of said movable plate is performed by said one or more biasing elements.

9. The safety apparatus as in claim **1**, wherein said safety apparatus is disposed at an elevator ceiling.

10. The safety apparatus as in claim **9**, wherein said spacing devices are holding rods securely attached to said elevator ceiling, wherein said holding rods include stoppers for holding said movable plate.

11. The safety apparatus as in claim **10**, wherein said holding rods are adjustable.

12. The safety apparatus as in claim **9**, wherein said return of said movable plate is performed by the gravity force.

13. The safety apparatus as in claim **1**, further comprising a solenoid.

14. The safety apparatus as in claim **1** further including an electronic control unit.

15. The method as in claim **14**, wherein said electronic control unit activates an alarm upon said sensing of said motion of said movable plate towards said surface of said respective reduced end.

16. In an elevator including an elevator shaft, the elevator shaft having reduced ends, the reduced ends being an elevator pit and an elevator overhead, a load sensing safety apparatus facilitated to activate an emergency safety gear of the elevator, the load sensing safety apparatus comprising:

a) a movable plate;

b) one or more spacing devices;

c) one or more pressure sensors;

d) a locking trigger mechanism for triggering said activation of the emergency safety gear of the elevator; and

e) an electronic control unit,

wherein said spacing devices maintain said movable plate at a predesigned distance from a surface of the respective reduced end of said elevator shaft, the elevator being in idle state;

wherein said one or more pressure sensors are operatively connected to said movable plate;

wherein when pressure is applied onto said movable plate towards said surface of said respective reduced end of said elevator shaft, the force of said pressure being over a predesigned threshold value, said movable plate moves towards said surface of said respective reduced end and said one or more pressure sensors sense said pressure, thereby activating said locking trigger mechanism; and

wherein said electronic control unit activates an alarm upon said sensing of said motion of said movable plate towards said surface of said respective reduced end.

* * * * *