US009051681B1

(12) **United States Patent**
Costa

(10) **Patent No.: US 9,051,681 B1**
(45) **Date of Patent: Jun. 9, 2015**

(54) **METHOD OF FOLDING AND WEARING A POCKET SQUARE TO DISPLAY INSIGNIA, CAMPAIGN RIBBON, ICON, BADGE, AWARD, OR MEDAL**

(71) Applicant: **Christopher Costa**, Clifton, NJ (US)

(72) Inventor: **Christopher Costa**, Clifton, NJ (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/210,566**

(22) Filed: **Mar. 14, 2014**

(51) **Int. Cl.**

D06F 89/02	(2006.01)
A41B 15/02	(2006.01)
A41D 27/20	(2006.01)

(52) **U.S. Cl.**
CPC ***D06F 89/02*** (2013.01)

(58) **Field of Classification Search**
CPC D06F 89/00; D06F 89/02; D06F 89/023; D06F 89/026; B65D 85/18; B65D 85/102; A41D 15/00; A41D 23/00; A41D 27/20; A41D 23/201
USPC 223/37; 2/279, 201, 247; D2/500, 502, D2/503, 508; 40/124.06
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,185,767	A *	6/1916	Cather et al.	229/75
1,785,962	A *	12/1930	Line	2/279
2,117,465	A *	5/1938	Tully	2/250
2,200,601	A *	5/1940	Grunwald	223/111
D121,695	S *	7/1940	Palmer	D2/502
2,909,785	A *	10/1959	Mysels	2/279
3,026,532	A *	3/1962	Janz	2/279
4,771,502	A *	9/1988	Trimble	15/209.1
6,510,629	B1 *	1/2003	Smidt et al.	40/1.5

* cited by examiner

Primary Examiner — Ismael Izaguirre
(74) *Attorney, Agent, or Firm* — Michael J. Feigin, Esq.; Feigin & Associates, LLC

(57) **ABSTRACT**

Embodiments of the disclosed technology are directed to a pocket square and/or methods of folding and displaying a pocket square in a customized manner. The piece of fabric employed may be of any size or design. In embodiments, the fabric has a design, which, when folded and displayed according to the disclosed method, gives a customized appearance. The customized appearance may be, for example, a replication of an insignia, ribbon, icon, medal, rank or badge worn by a service man or woman. The appearance may also be of a flag, club, fraternity, team, or other insignia that one may desire to display. In embodiments, the same piece of fabric may be used to form different design configurations and/or layouts.

9 Claims, 5 Drawing Sheets

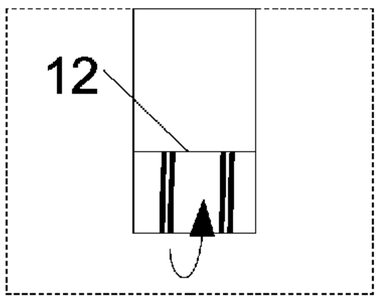



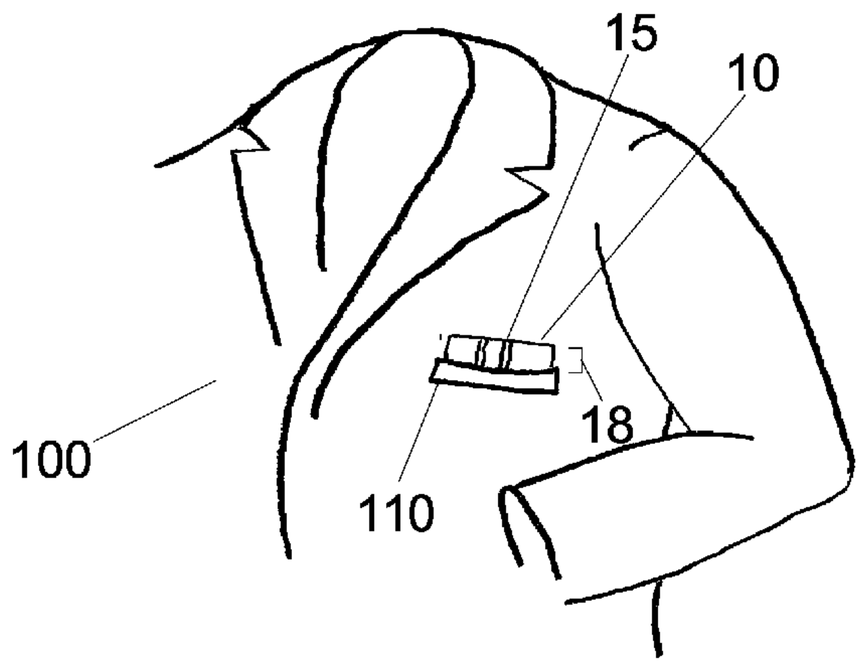

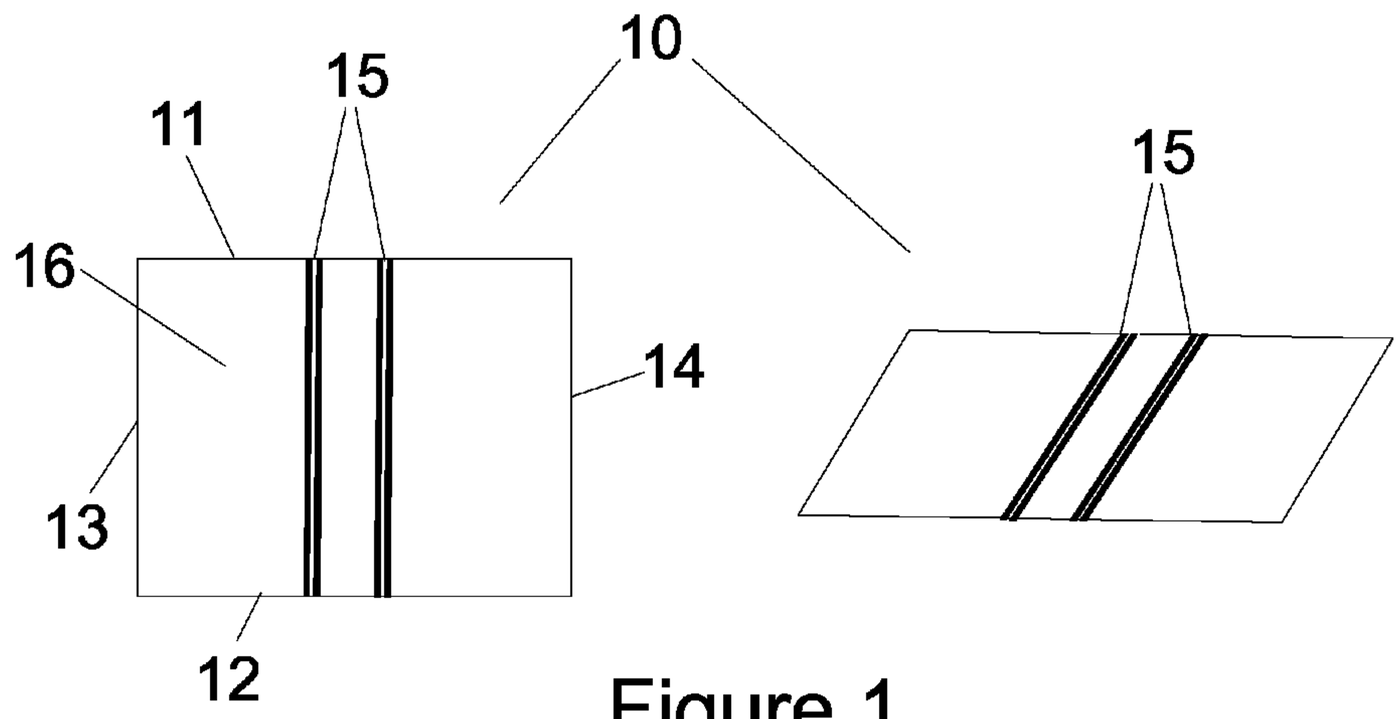

Figure 1

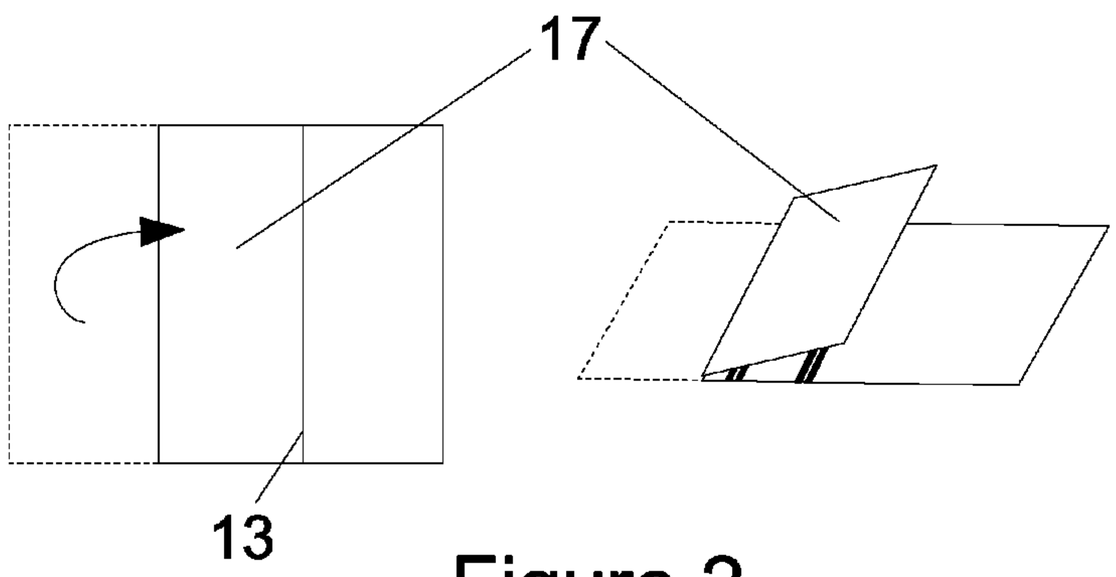

Figure 2

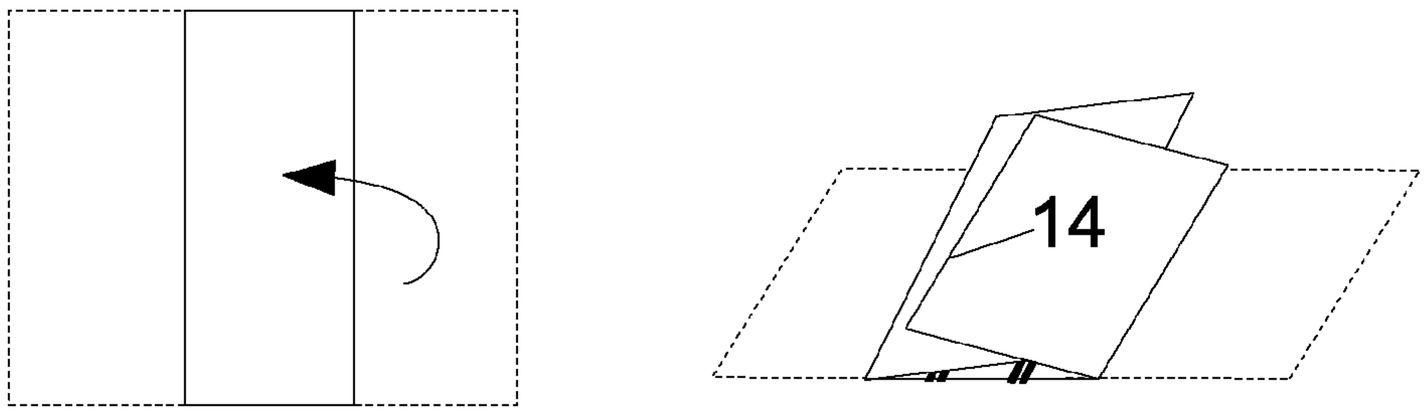

Figure 3

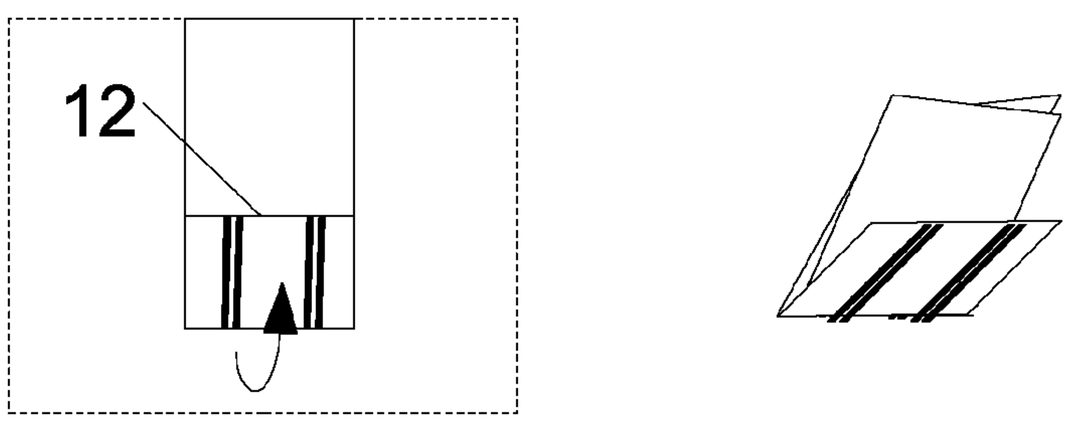

Figure 4

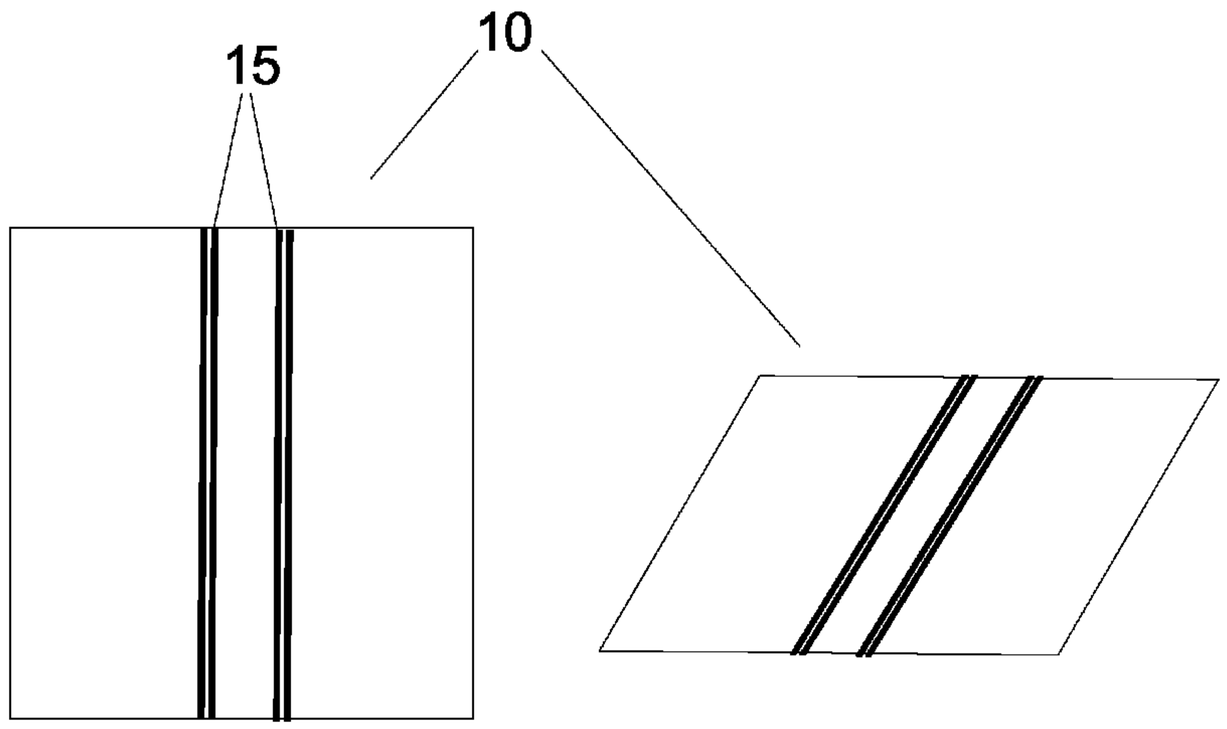

Figure 5

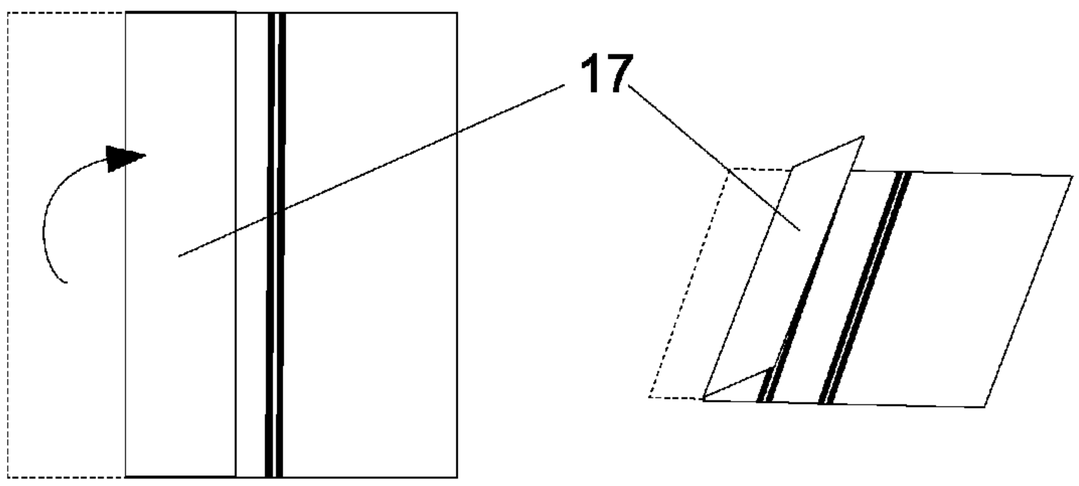

Figure 6

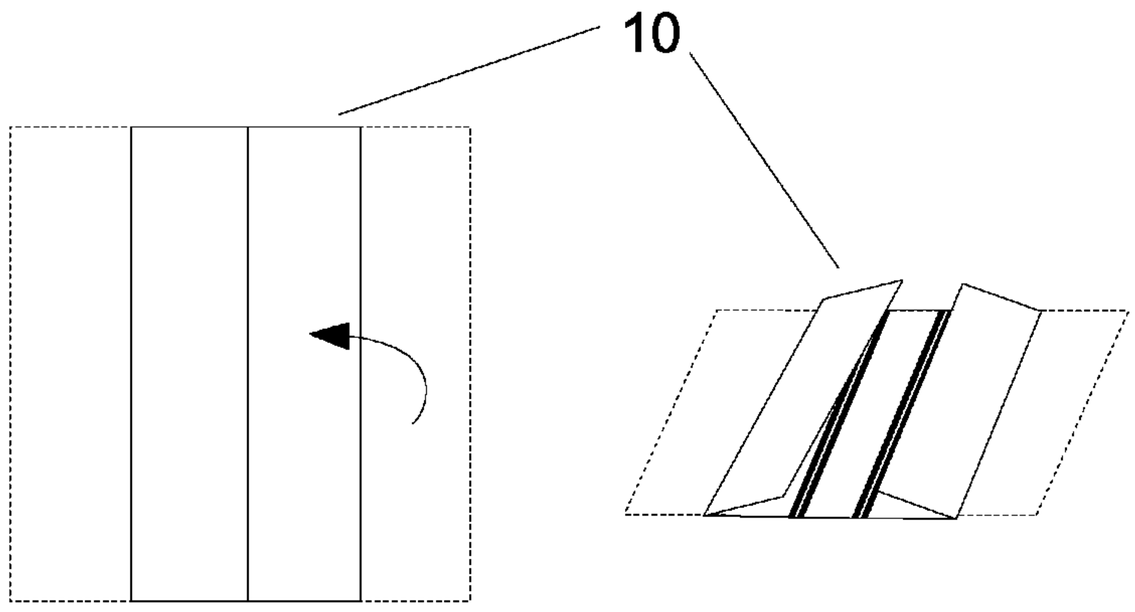

Figure 7

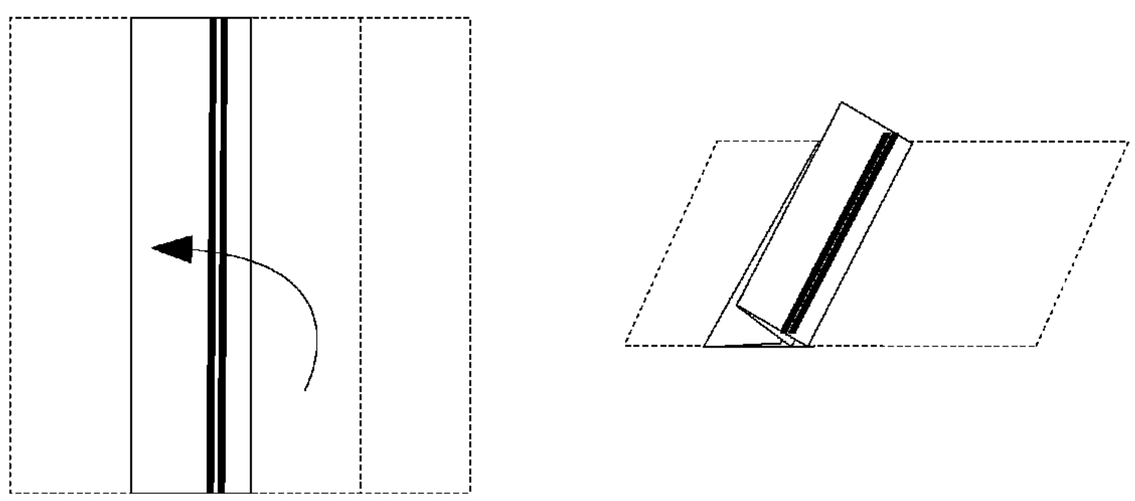

Figure 8

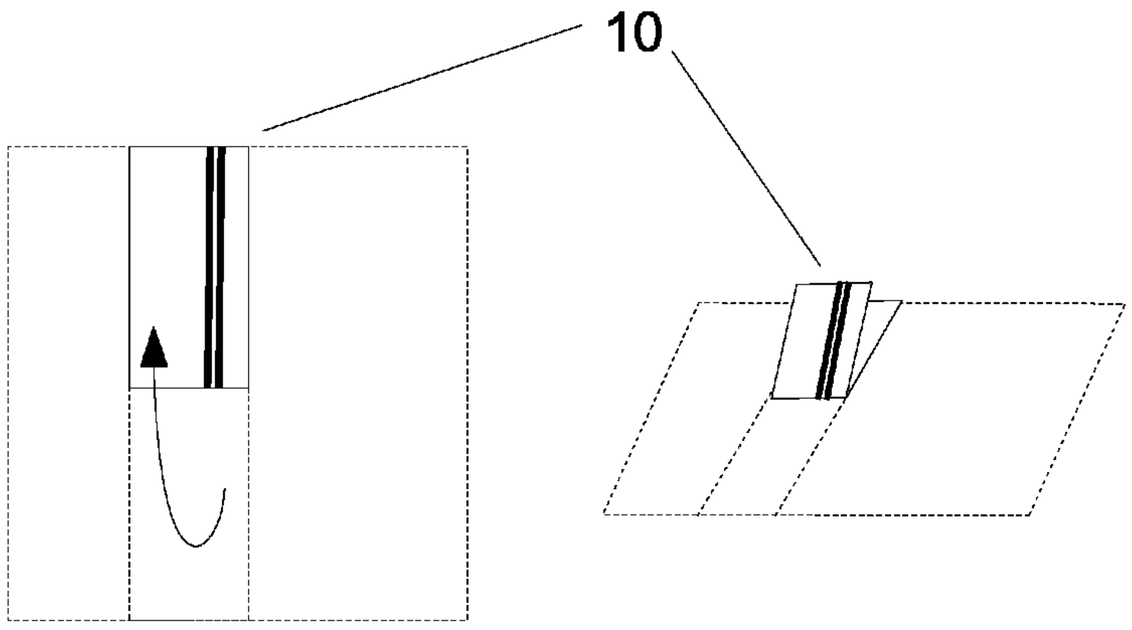

Figure 9

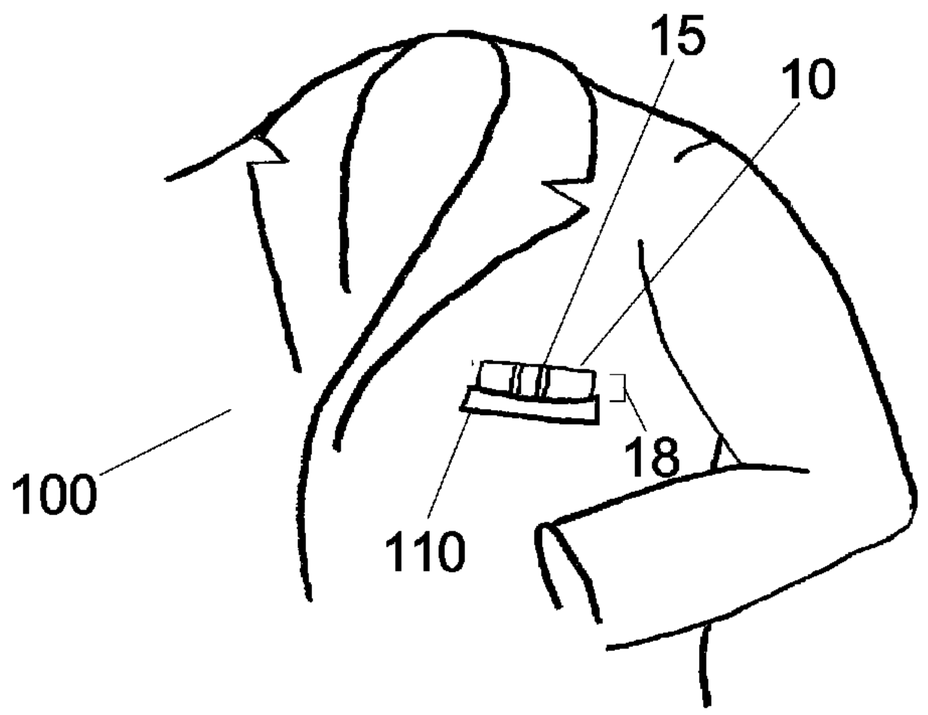

Figure 10

METHOD OF FOLDING AND WEARING A POCKET SQUARE TO DISPLAY INSIGNIA, CAMPAIGN RIBBON, ICON, BADGE, AWARD, OR MEDAL

FIELD OF THE DISCLOSED TECHNOLOGY

The disclosed technology relates generally to apparel accessories, and more particularly to using and displaying a custom pocket square.

BACKGROUND OF THE DISCLOSED TECHNOLOGY

Appearance of formal wear continues to be an important part of presenting oneself in an occupational or special occasional setting. Neckties are worn in various environments from weddings and social events to job interviews and business meetings. Often accompanying a necktie is a pocket square worn in the suit jacket pocket of the wearer. The pocket square may match the wearer's necktie or shirt color, thereby giving the wearer a more refined and formal appearance. While most pocket squares serve the purpose of an easy and fancy accessory to a suit, they usually serve no further purpose.

Thus, needed in the art are pocket squares and methods for displaying an insignia, campaign ribbon, icon, logo, medal, award or badge that indicates or expresses something about the wearer.

SUMMARY OF THE DISCLOSED TECHNOLOGY

Therefore, it is an object of the disclosed technology to provide a method of folding a pocket square such that a particular insignia of the pocket square is displayed when worn.

In an embodiment of the disclosed technology, a method is used for folding and donning a pocket square using a square piece of a material. The method is carried out, not necessarily in the following order, by: a) folding a first vertical crease in the piece of material wherein the crease is approximately one-third of a width of the piece of material from a first vertical edge of the piece of material; b) folding a second vertical crease in the piece of material wherein the second crease is approximately two-thirds of the width of the piece of material from the first vertical edge of the piece of material; c) folding a first horizontal crease in the piece of material wherein the first horizontal crease is between one-fourth and one-half of a distance from a bottom edge to a top edge of the piece of material; and d) placing the piece of material in a pocket of a jacket or shirt such that an exposed portion of the piece of material protrudes from the pocket.

In a further embodiment, the piece of material is placed in the jacket, sport coat or suit such that an exposed portion of the piece of material resembles a badge, medal, ribbon, icon, or award worn by a service person. Furthermore, the first horizontal crease may be formed based on a depth of the pocket. Still further, the piece of material may have a design that is displayed on the exposed portion of the piece of material. Alternatively, the piece of material may have multiple symbols which are selectively displayed based on the method of folding. Still further, the piece of material may have four identical symbols, of which any number is selectively displayed based on the method of folding.

In another embodiment of the disclosed technology, a method is used for donning a pocket square. The method is carried out, not necessarily in the following order, by: a) laying out a rectangular, or square fabric, the fabric having a front face, a back face, a top edge, a bottom edge, a left edge, a right edge and a design adorning at least an uppermost portion of the front face or the back face of the fabric; b) folding the left edge to a central vertical axis on the front face of the fabric; c) folding the right edge to the central vertical axis on the front face of the fabric such that the right edge meets the left edge; d) folding the fabric along the central vertical axis; e) folding the fabric along a horizontal axis; and f) placing the fabric in a pocket of a jacket, sport coat or shirt.

In a further embodiment of the disclosed method, the horizontal axis is a central horizontal axis. Still further, an exposed portion of the fabric displays the design.

It should be understood that the use of "and/or" is defined inclusively such that the term "a and/or b" should be read to include the sets: "a and b," "a or b," "a," "b." Further details are set forth in the detailed description below.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** shows a top view and a perspective view of an unfolded pocket square according to embodiments of the disclosed technology.

FIG. **2** shows a top view and a perspective view illustrating a first step taken in folding a pocket square using a three-column method according to embodiments of the disclosed technology.

FIG. **3** shows a top view and a perspective view illustrating a second step taken in folding a pocket square using a three-column method according to embodiments of the disclosed technology.

FIG. **4** shows a top view and a perspective view illustrating a third step taken in folding a pocket square using a three-column method according to embodiments of the disclosed technology.

FIG. **5** shows a top view and a perspective view of another unfolded pocket square according to embodiments of the disclosed technology.

FIG. **6** shows a top view and a perspective view illustrating a first step taken in folding the pocket square of FIG. **5** using a four-column method according to embodiments of the disclosed technology.

FIG. **7** shows a top view and a perspective view illustrating a second step taken in folding the pocket square of FIG. **5** using a four-column method according to embodiments of the disclosed technology.

FIG. **8** shows a top view and a perspective view illustrating a third step taken in folding the pocket square of FIG. **5** using a four-column method according to embodiments of the disclosed technology.

FIG. **9** shows a top view and a perspective view illustrating a fourth step taken in folding the pocket square of FIG. **5** using a four-column method according to embodiments of the disclosed technology.

FIG. **10** shows folded pocket square being worn in accordance with an embodiment of the disclosed technology.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE DISCLOSED TECHNOLOGY

Embodiments of the disclosed technology are directed to a pocket square and/or methods of folding and displaying a pocket square in a customized manner. The piece of fabric employed may be of any size or design. In embodiments, the fabric has a design, which, when folded and displayed according to the disclosed method, gives a customized appearance.

The customized appearance may be, for example, a replication of an insignia, ribbon, icon, logo, medal, award or rank badge worn by an active or inactive service man or woman. The appearance may also be of a flag, club, fraternity, team, or other insignia that one may desire to display. In embodiments, the same piece of fabric may be used to form different design configurations and/or layouts.

Embodiments of the disclosed technology will become clearer in view of the following description of the Figures.

FIGS. **1** through **4** show top and perspective views illustrating steps taken in folding a pocket square using a three-column method according to embodiments of the disclosed technology. FIG. **1** shows a top view and a perspective view of an unfolded pocket square according to embodiments of the disclosed technology. The pocket square **10** may be formed of any type of flexible material or fabric. Further, the pocket square **10** may be a rectangle or a square having any size and/or dimensions. FIG. **1** shows a top view and a perspective view of an unfolded pocket square **10** according to embodiments of the disclosed technology.

The pocket square **10** has narrow stripes **15** which may be representative of a service ranking, ribbon and/or insignia. The arrangement in which the pocket square **10** is folded may give meaning and symbolism to stripes **15**. Referring still to FIG. **1**, the pocket square **10** may be generally described as having a top edge **11**, a bottom edge **12**, a left edge **13** and right edge **14**. Further, the front face **16** of the pocket square **10** is shown, while an opposing backside **17** is not viewable in FIG. **1**.

FIG. **2** shows a top view and a perspective view illustrating a first step taken in folding a pocket square using a three-column method according to embodiments of the disclosed technology. In the first step(s) of the three-column method, the pocket square **10** is laid out flat, and the first edge **13** is lifted and folded onto the front face **16**. A vertical crease is made at approximately one-third of the distance from the left edge **13** to the right edge **14**. The back face **17** of the pocket square is visible in FIG. **2**. FIG. **3** shows a top view and a perspective view illustrating a second step taken in folding a pocket square using a three-column method according to embodiments of the disclosed technology. Thus, in FIG. **3**, the right edge **14** is folded onto front face **16**. Thus, in FIG. **3**, the pocket square **10** is three layers thick.

FIG. **4** shows a top view and a perspective view illustrating a third step taken in folding a pocket square using a three-column method according to embodiments of the disclosed technology. In this step, the bottom edge **12** is folded up to make a crease approximately one-fourth to one-third of the distance from the bottom edge **12** to the top edge **11**. The location of this crease may vary based on: a) the size of the pocket square **10**; b) the depth of a pocket in which the pocket square will be worm; and c) the desired height of the visible portion of the pocket square when positioned in the pocket. It shall be noted that the pocket square **10** should be turned over from the position shown in FIG. **4** before insertion into the pocket in order to display the narrow stripes **15**. Furthermore, the location of this crease may vary based on the option of inserting pocket square **10** into the pocket a). when inserted into the pocket the wearer may view the 3 or 4 layers from the most vertical view, or b.) when inserted into the pocket the wearer may view only one horizontal crease from the vertical view.

FIGS. **5** through **9** show top and perspective views illustrating steps taken in folding a pocket square using a four-column method according to embodiments of the disclosed technology. FIG. **5** shows a top view and a perspective view of another unfolded pocket square according to embodiments of the disclosed technology. The pocket square **10** has narrow stripes **15** which may be representative of a service ranking, ribbon, medal and/or insignia. In this embodiment, the pocket square **10** may be taller, thicker and wider than that shown in FIGS. **1** through **4**. This is because the pocket square is folded in a four-column configuration as opposed to a three-column configuration. As such, the method depicted in FIGS. **5** through **9** may be used with a larger or over-sized piece of fabric that may not have been originally meant to be used as a pocket square. Such may be the case with a small flag, bandana, or other tapestry.

FIG. **6** shows a top view and a perspective view illustrating a first step taken in folding the pocket square of FIG. **5** using a four-column method according to embodiments of the disclosed technology. In the first step(s) of the four-column method, the pocket square **10** is laid out flat, and the first edge **13** is lifted and folded onto the front face **16**. A vertical crease is made at approximately one-fourth of the distance from the left edge **13** to the right edge **14**. The back face **17** of the pocket square is visible in FIG. **2**.

FIG. **7** shows a top view and a perspective view illustrating a second step taken in folding the pocket square of FIG. **5** using a four-column method according to embodiments of the disclosed technology. Thus in FIG. **7**, the right edge **14** is folded onto front face **16** to form a crease approximately one-fourth of the way between the right edge **14** and the left edge **13**.

FIG. **8** shows a top view and a perspective view illustrating a third step taken in folding the pocket square of FIG. **5** using a four-column method according to embodiments of the disclosed technology. Thus, in FIG. **8**, the pocket square **10** is folded in half along a central vertical axis. Thus, after FIG. **8**, the pocket square **10** is four layers thick. The back face **17** of the pocket square **10** with a set of narrow stripes **15** is visible in this view. The pocket square **10** is then inserted into a jacket pocket for use.

FIG. **9** shows a top view and a perspective view illustrating a fourth step taken in folding the pocket square of FIG. **5** using a four-column method according to embodiments of the disclosed technology. In this step, the pocket square **10** is folded along a central horizontal axis such that the bottom edge **12** meets the top edge **11**.

FIG. **10** shows folded pocket square being worn in accordance with an embodiment of the disclosed technology. The jacket **100** may be a suit jacket, sport coat, tuxedo jacket, etc. The jacket **100** has at least one pocket **110** on a breast portion thereof. The folded pocket square **10** of either FIG. **4** or FIG. **9** may be placed into the pocket such that the stripe or stripes **15** are displayed on the visible portion **18** of the pocket square. The final crease made along a horizontal axis may be adjusted to preference to in turn adjust the height of the exposed portion **18** of the pocket square **10**. As depicted, the exposed portion **18** the pocket square **10** resembles a badge, ribbon, medal or ranking indicia of a public service or private membership group.

The particular way in which the pocket square **10** is folded may dictate the configuration and appearance of a ribbon, medal, award or ranking indicia. Thus, for example, if the pocket square is used by a fire department for displaying a logo, ribbon, or citation of the member firefighters during formal occasions, then red stripes may be adorned on a black pocket square, expressing the wearer as a firefighter displayed in FIG. **1** though **4**. If the wearer is a military Veteran, stripes shall be displayed and thus the pocket square should be folded in similar fashion to the steps depicted in FIGS. **5** through **9**. Alternatively, if the member is Law Enforcement Officer, then the pocket square shall be folded to display blue stripes

on a black pocket square as depicted in FIGS. **1** through **4**. Thus, the same pocket square **10** may be used to display rankings, citations, or awards of either a captain or a lieutenant, depending on the way in which it is folded.

While the disclosed technology has been taught with specific reference to the above embodiments, a person having ordinary skill in the art will recognize that changes can be made in form and detail without departing from the spirit and the scope of the disclosed technology. The described embodiments are to be considered in all respects only as illustrative and not restrictive. All changes that come within the meaning and range of equivalency of the claims are to be embraced within their scope. Combinations of any of the methods, systems, and devices described hereinabove are also contemplated and within the scope of the disclosed technology.

I claim:

1. A method of folding and donning a pocket square using square piece of a material, said method comprising:

folding a first vertical crease in said piece of material wherein said crease is approximately one-third of a width of said piece of material from a first vertical edge of said piece of material;

folding a second vertical crease in said piece of material wherein said second crease is approximately two-thirds of said width of said piece of material from said first vertical edge of said piece of material;

folding a first horizontal crease in said piece of material wherein said first horizontal crease is between one-fourth and one-third of a distance from a bottom edge to a top edge of said piece of material; and

placing said piece of material in a pocket of a jacket or shirt such that an exposed portion of the piece of material is protrudes from said pocket.

2. The method of claim **1**, wherein said piece of material is placed in said jacket or suit such that an exposed portion of said piece of material resembles a badge, ribbon, medal, or award worn by a active, or inactive service person.

3. The method of claim **1**, wherein said first horizontal crease is formed based on a depth of said pocket.

4. The method of claim **1**, wherein said piece of material further comprises a design that is displayed on said exposed portion of said piece of material.

5. The method of claim **1**, wherein said piece of material further comprises multiple symbols which are selectively displayed based on said method of folding.

6. The method of claim **5**, wherein said piece of material further comprises four identical symbols, of which any number is selectively displayed based on said method of folding.

7. A method of donning a pocket square, said method comprising:

laying out a square fabric, said fabric having a front face, a back face, a top edge, a bottom edge, a left edge, a right edge and a design adorning at least an uppermost portion of said front face or said back face of said fabric;

folding said left edge to a central vertical axis on said front face of said fabric;

folding said right edge to said central vertical axis on said front face of said fabric such that said right edge meets said left edge;

folding said fabric along said central vertical axis;

folding said fabric along a horizontal axis; and

placing said fabric in a pocket of a jacket or shirt.

8. The method of claim **7**, wherein said horizontal axis is a central horizontal axis.

9. The method of claim **7**, wherein an exposed portion of said fabric displays said design.

* * * * *